

9

8

7

6

5

4

3



2

1


E


注記 NOTES

1. 製品詳細寸法については図面5047541000を参照下さい。
REFER TO THE 5047541000 ABOUT DIMENSIONS IN DETAIL.
2. 梱包数量：5000個/リール
NUMBER OF CONNECTORS：5000 PCS/REEL
3. リードテープ長さ
LEAD TAPE LENGTH

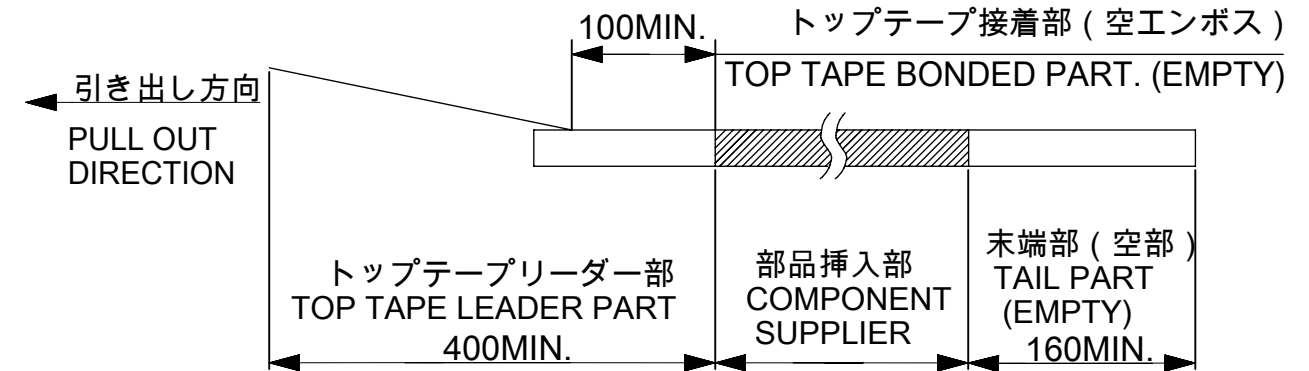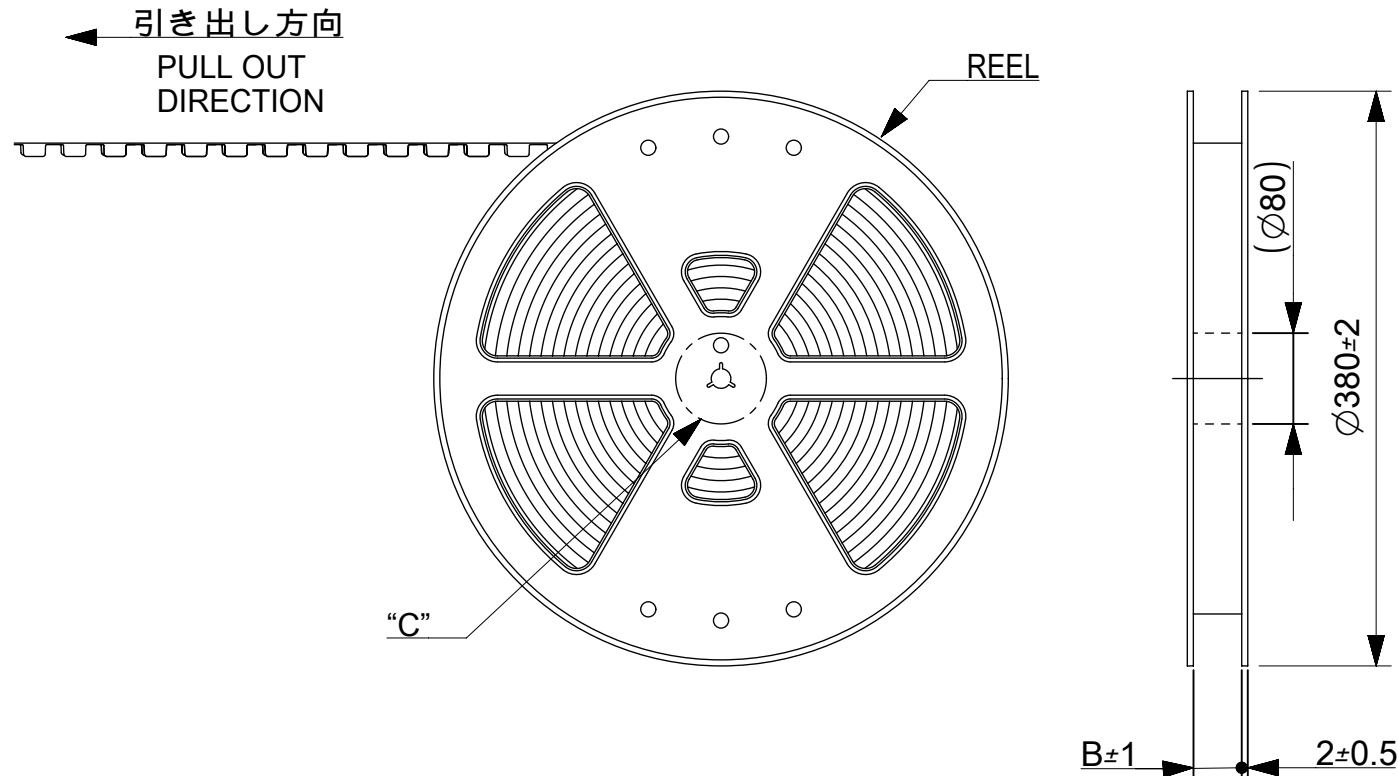

4. 材料 MATERIAL
キャリアテープ(CARRIER TAPE)：ポリスチレン(POLYSTYRENE)
トップテープ(TOP TAPE)：PET, PE, PEF
リール(REEL)：ポリスチレン(PS)リサイクル材含む
POLYSTYRENE(PS)RECYCLE MATERIAL CONTAINED
5. ELV及びRoHS適合品
ELV AND RoHS COMPLIANCT

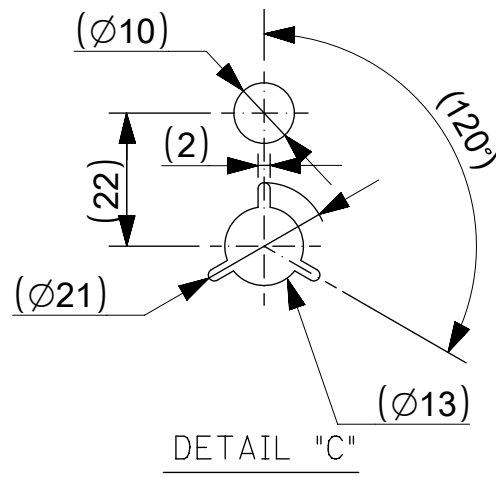

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														
REVISED	EC NO: 106328 DRWN: YCHEN128 CHK'D: YKOBAYASHI02 APPR: TKUSUHARA01	2016/07/05 2016/07/07 2016/07/07	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS		SCALE		molex®					
					MM		10:1							
			ANGULAR TOL ± 1.0 °		DRWN BY		DATE		0.3 FPC CONN. B/F LA75 SERIES TAPING PKG					
					AYOSHII01		2016/03/18							
			4 PLACES ± 0.03		CHK'D BY		DATE		PRODUCT CUSTOMER DRAWING					
			3 PLACES ± 0.03		YKOBAYASHI02		2016/03/31							
			2 PLACES ± 0.05		APPR BY		DATE		SERIES MATERIAL NUMBER CUSTOMER					
			1 PLACE ± 0.1		TKUSUHARA01		2016/03/31							
			0 PLACES ± 0.2		DRAWING SIZE		THIRD ANGLE PROJECTION		504754		SEE CHART			
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		A3				DOCUMENT NUMBER		DOC TYPE	DOC PART	SHEET NUMBER	
5047540000		PSD							000	1 OF 2				

A

B

D

E

9

8

7

6

5


4

3

2

1

FORMAT: lb-prod-A3
REVISION: F
DATE: 2015/11/18

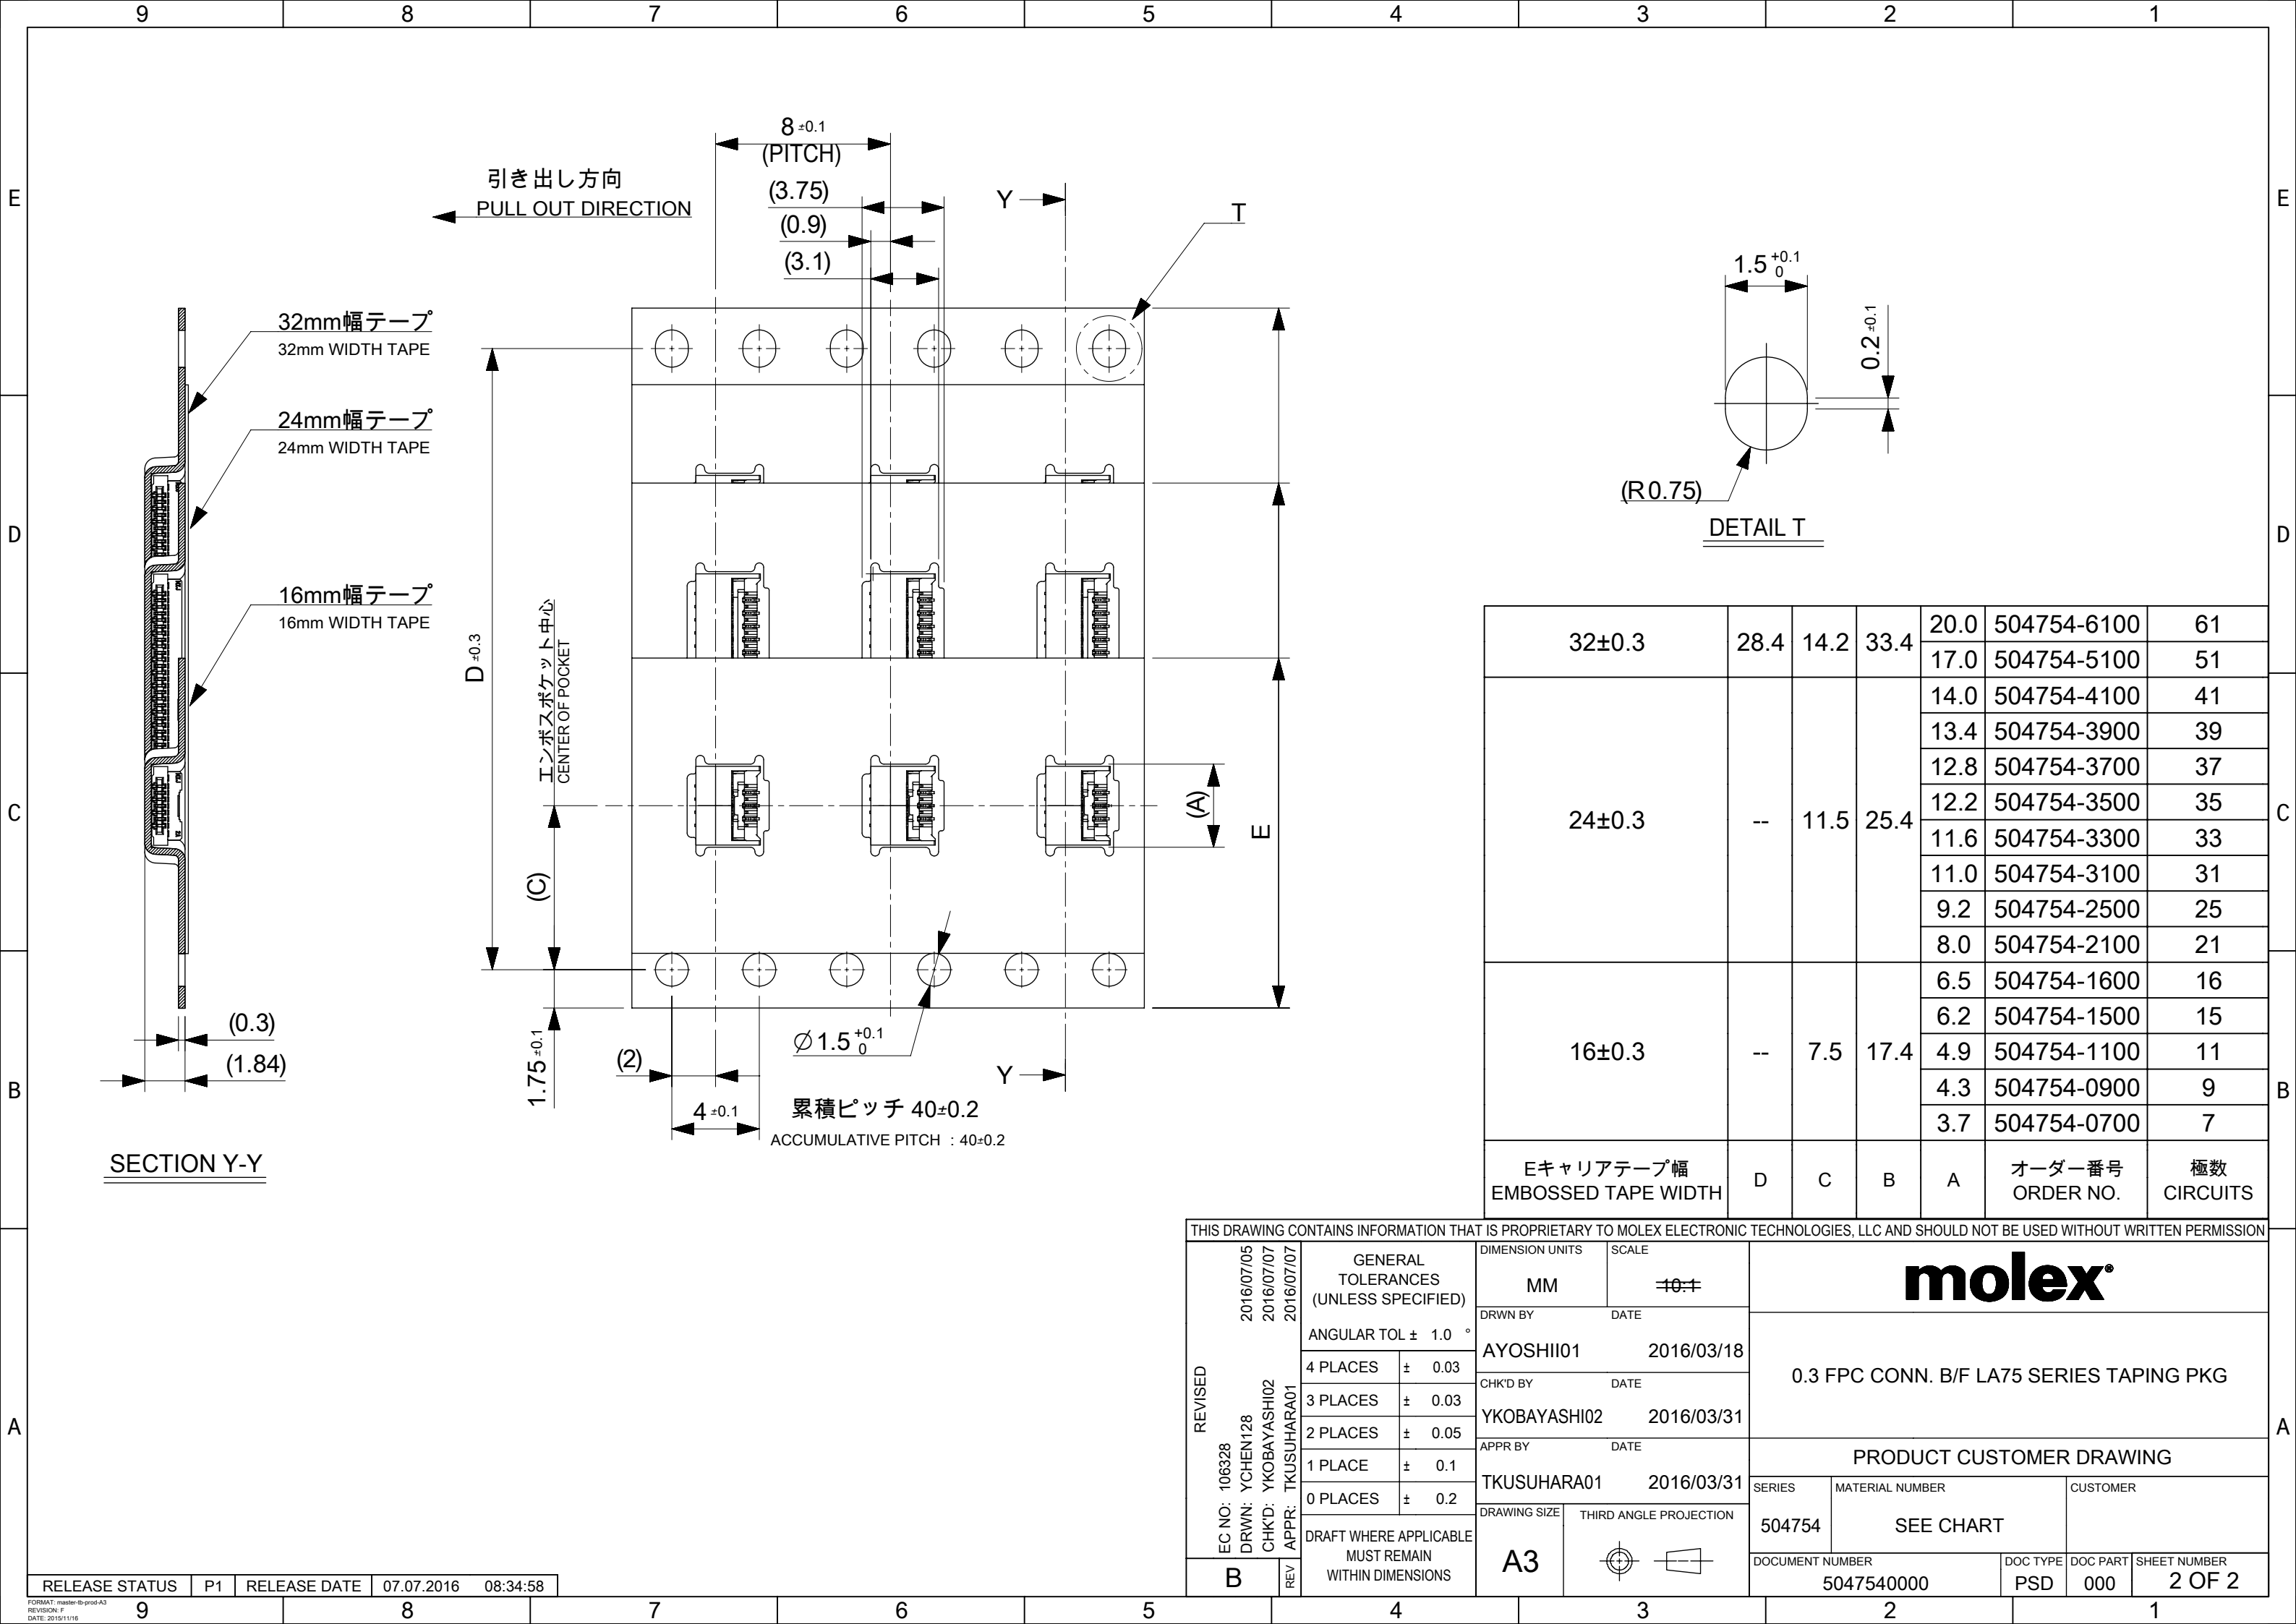



SECTION Y-Y


DETAIL T

32±0.3	28.4	14.2	33.4	20.0	504754-6100	61
				17.0	504754-5100	51
24±0.3	--	11.5	25.4	14.0	504754-4100	41
				13.4	504754-3900	39
				12.8	504754-3700	37
				12.2	504754-3500	35
				11.6	504754-3300	33
				11.0	504754-3100	31
				9.2	504754-2500	25
				8.0	504754-2100	21
16±0.3	--	7.5	17.4	6.5	504754-1600	16
				6.2	504754-1500	15
				4.9	504754-1100	11
				4.3	504754-0900	9
				3.7	504754-0700	7
Eキャリアテープ幅 EMBOSSED TAPE WIDTH	D	C	B	A	オーダー番号 ORDER NO.	極数 CIRCUITS

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISED	EC NO: 106328	DRWN: YCHEN128	CHK'D: YKOBAYASHI02	APPR: TKUSUHARA01	2016/07/05		2016/07/07		2016/07/07		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS		SCALE		molex®					
	MM		10.1																			
	ANGULAR TOL ± 1.0 °				DRWN BY		DATE		0.3 FPC CONN. B/F LA75 SERIES TAPING PKG													
					AYOSHII01		2016/03/18															
	4 PLACES		± 0.03		CHK'D BY		DATE		PRODUCT CUSTOMER DRAWING													
	3 PLACES		± 0.03		YKOBAYASHI02		2016/03/31															
	2 PLACES		± 0.05		APPR BY		DATE		SERIES						MATERIAL NUMBER		CUSTOMER					
	1 PLACE		± 0.1		TKUSUHARA01		2016/03/31															
	0 PLACES		± 0.2		DRAWING SIZE		THIRD ANGLE PROJECTION		504754		SEE CHART		DOCUMENT NUMBER		DOC TYPE		DOC PART		SHEET NUMBER			
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				A3				5047540000												PSD	

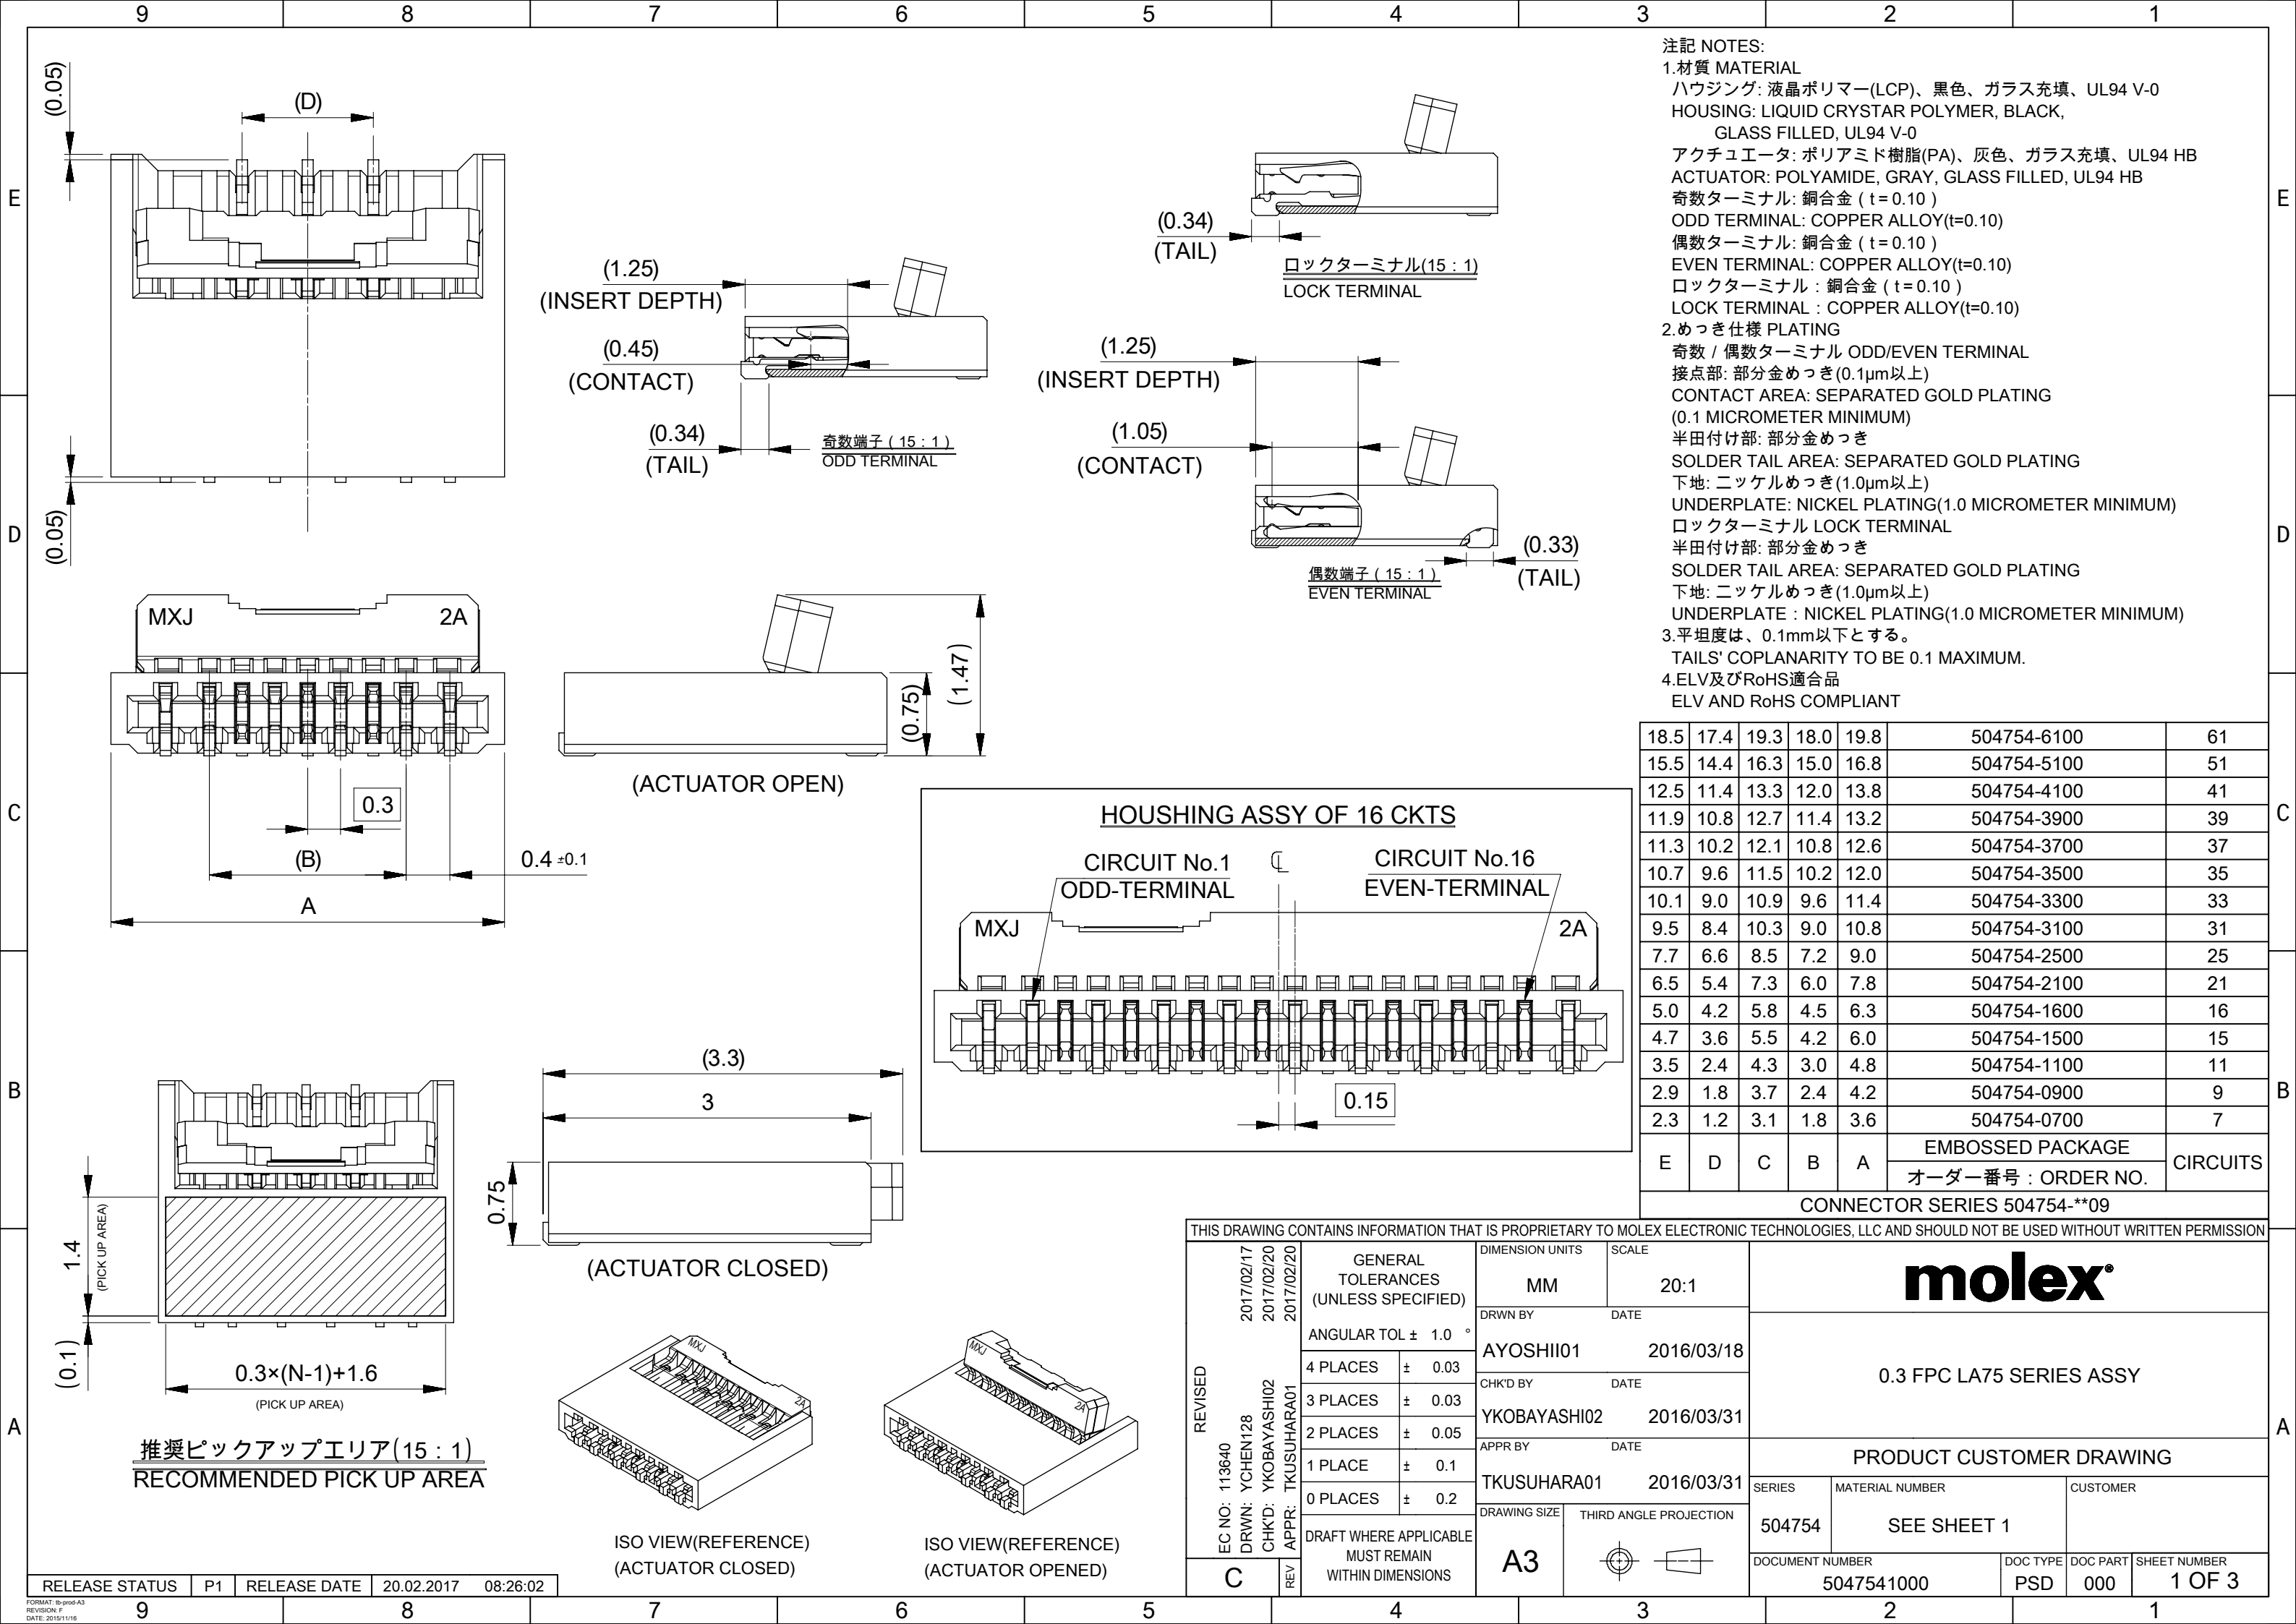

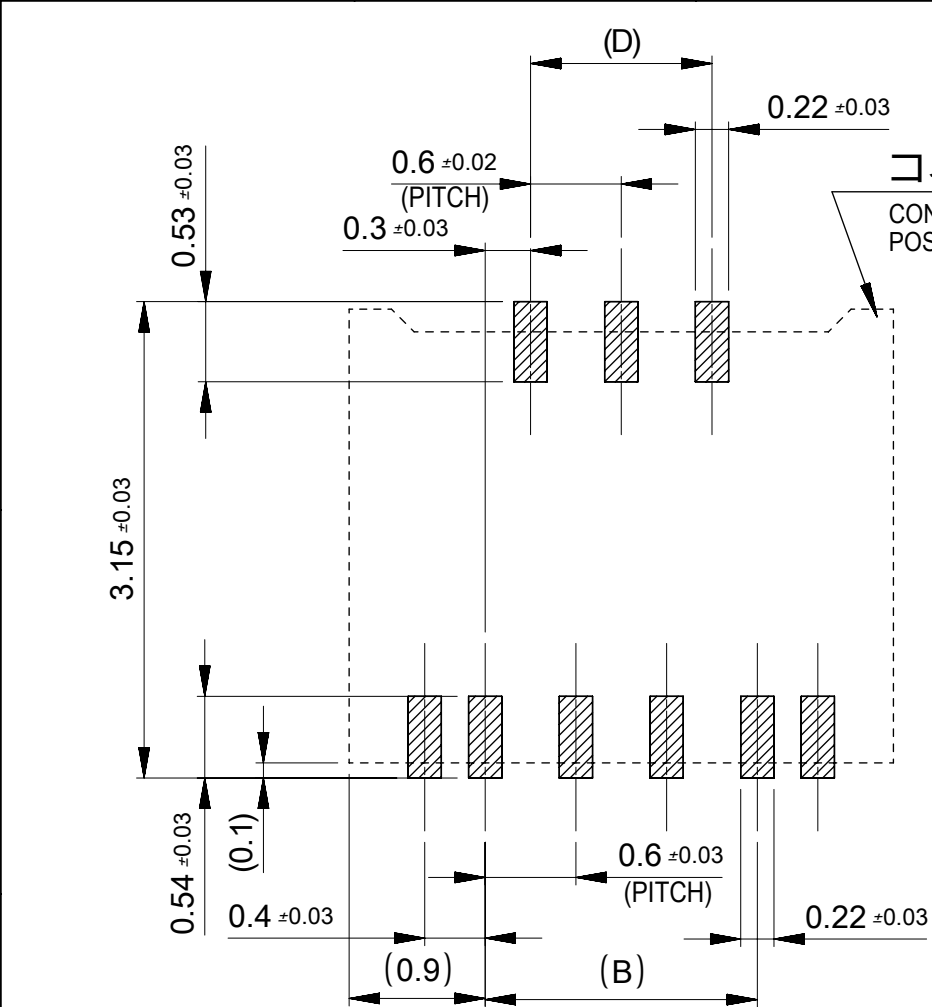

推奨基板レイアウト
RECOMMENDED P.C. BOARD
PATTERN LAYOUT

推奨メタルマスク厚さ : 0.1mm
RECOMMENDED METAL MASK THICKNESS : 0.1mm


推奨開口率 : 80%
APERTURE RATE : 80%

注記
NOTE


1. 必ず基板に実装してからアクチュエ-タを操作して下さい。
PLEASE OPERATE THE ACTUATOR AFTER MOUNTING ON THE SUBSTRATE.

2. FPCについて
ABOUT FPC
補強フィルム材質はポリイミドを推奨します。ベースフィルムは25μmを推奨します。
接着剤は熱硬化接着剤を推奨します。
尚、接着剤の接点部への付着は導通不良の原因になりますので、染み出しが無い様、お願い致します。
RECOMMENDED STIFFENER MATERIAL: POLYIMIDE
RECOMMENDED BASE FILM THICKNESS: 25 MICROMETER
RECOMMENDED ADHESIVE: THERMOSETTING ADHESIVE
NOTE: PLEASE PUT APPROPRIATE AMOUNT OF ADHESIVE ON ADHEREND BECAUSE THERE IS A POSSIBILITY THAT THE EXTRA ADHESIVE CAUSES THE DEFECT IN ELECTRICAL CONTINUITY.

打抜き方向は導体側から補強板側を推奨致します。
RECOMMENDED PUNCHER DIRECTION:
FROM CONDUCTOR SIDE TO STIFFENER FILM SIDE.

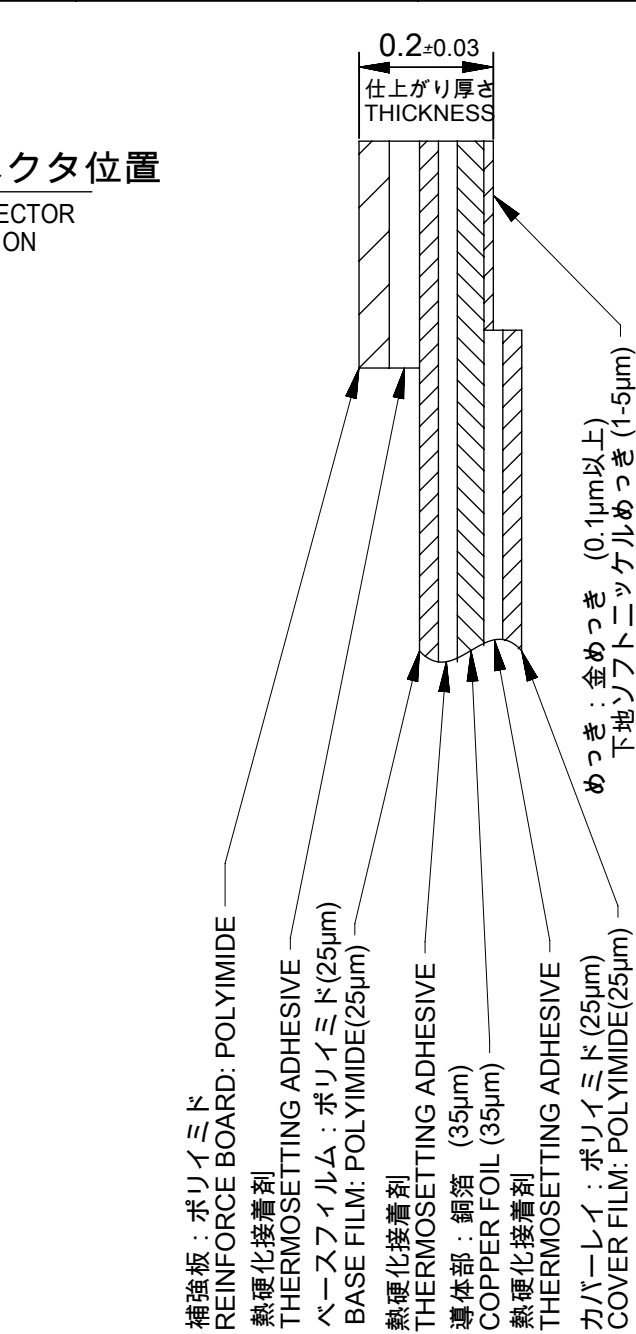

FPC構成推奨仕様
STRUCTURE OF FPC

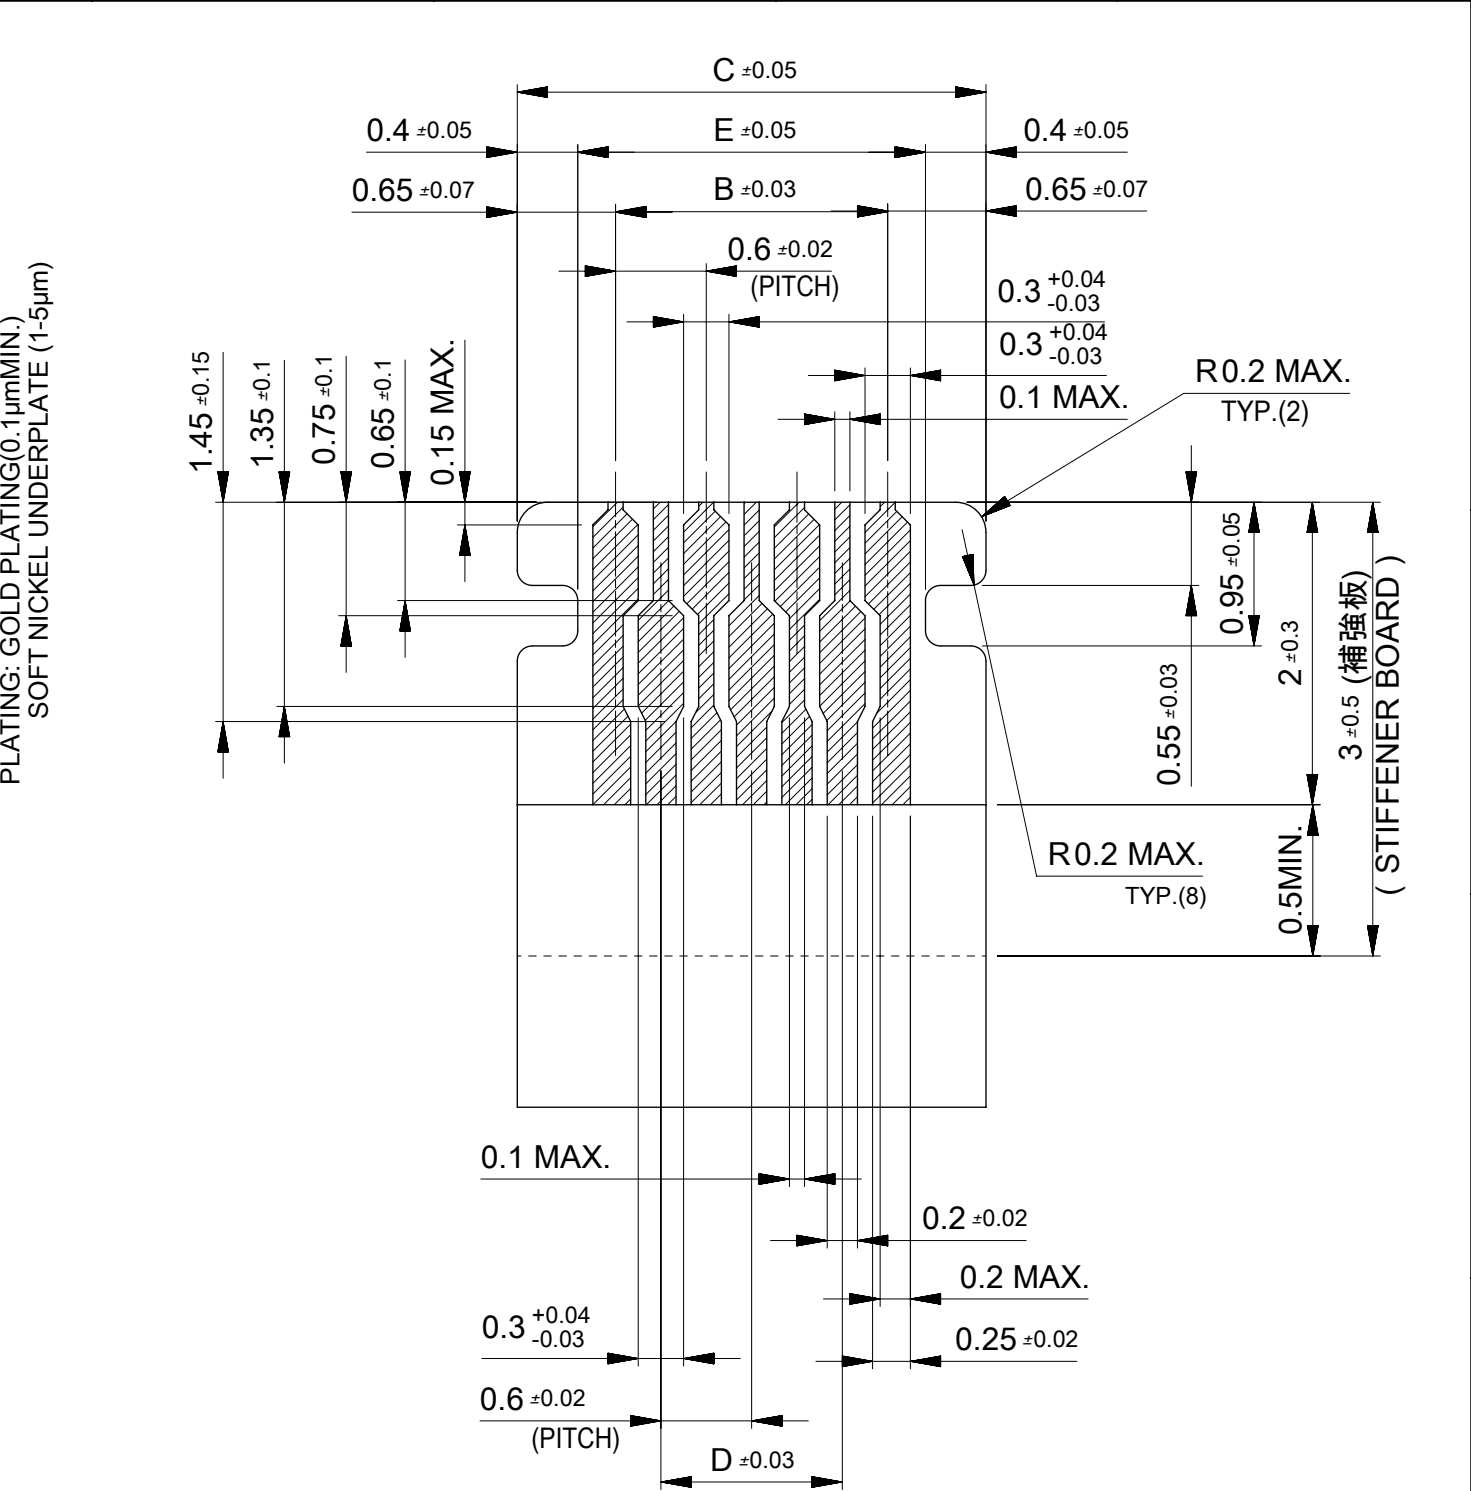

適合金メッキFPC推奨寸法
仕上がり厚さ : 0.2±0.03
APPLICABLE FPC WITH GOLD PLATING
RECOMMENDED DIMENSION
THICKNESS : 0.2±0.03

