

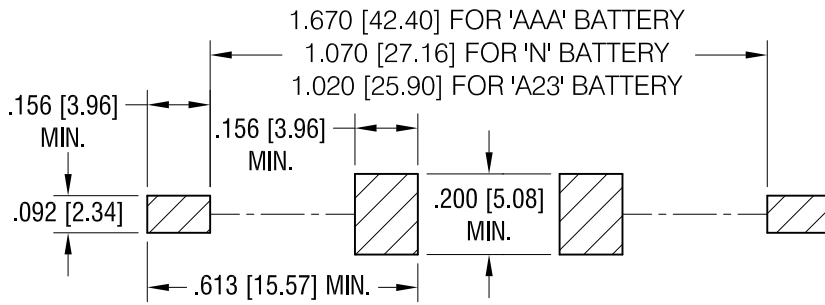


MOUNTING PAD LAYOUT. REQUIRED SPACING FOR 'AAA', 'N', 'A23' BATTERIES

THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

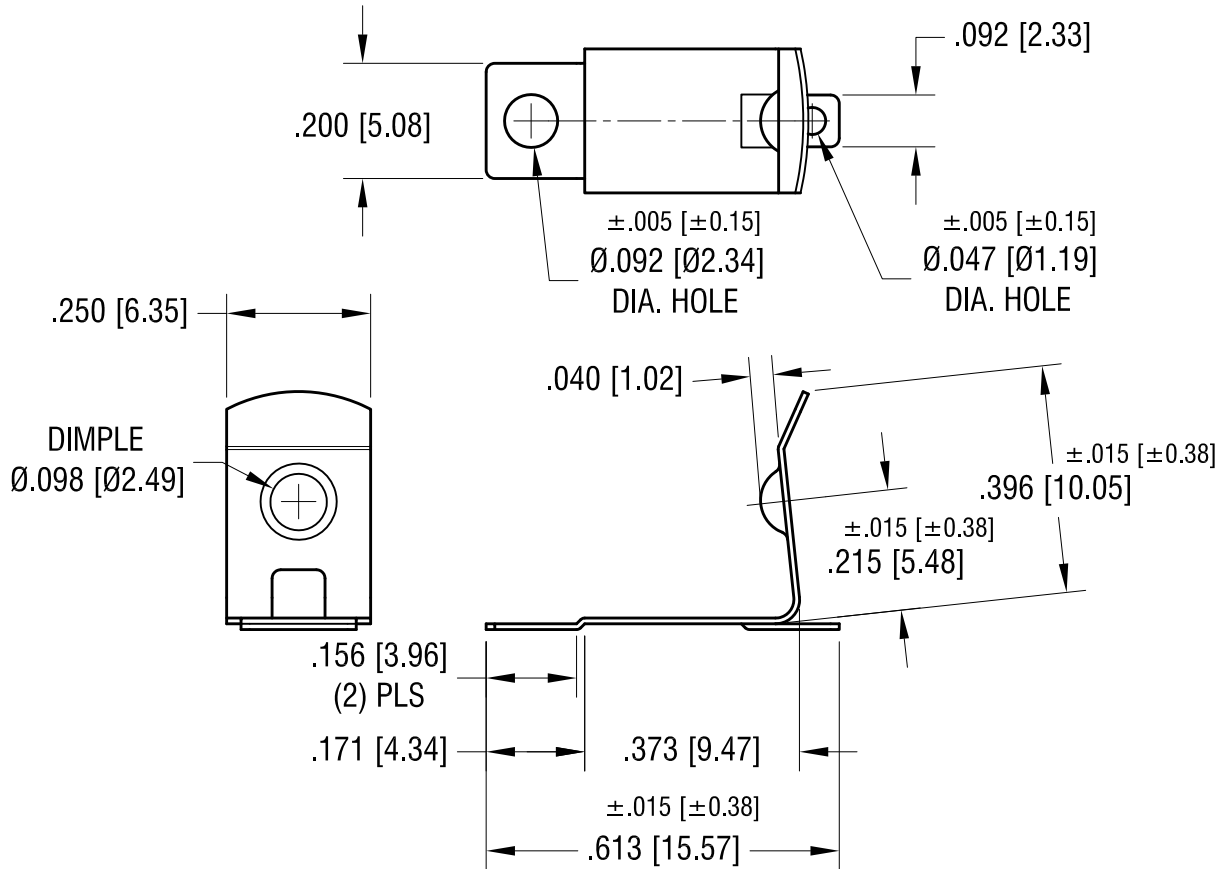

ACTUAL SIZE



NOTE:

1. HEAT TREAT TO SPRING TEMPER.

KEYSTONE ELECTRONICS CORP.

www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500

PART NAME		'AAA' SMT BATTERY CLIP	
MATERIAL		.010 [0.25] ANNEALED SPRING STEEL	
FINISH	DRN BY	DATE	
MATTE TIN PLATE	NT	8.10.09	
	APP'D	SCALE	
	RH	3X	
TOLERANCES	INCH	[MM]	CODE
DECIMAL	± .010	[± 0.25]	C
ANGULAR	± 1°		
UNLESS OTHERWISE SPECIFIED			DWG NO.
			556

8.07.23	CHANGE AS PER ECN 23-134	B
5.31.17	CHANGE AS PER ECR 17-031	A
DATE	DESCRIPTION	REV.