## 8-6318491-6 V ACTIVE

#### Free Height

TE Internal #: 8-6318491-6

PCB Mount Header, Vertical, Board-to-Board, 220 Position, .5 mm [.


02 in] Centerline, Gold, Surface Mount, Signal, Black, Tray, Free

Height

View on TE.com >



Connectors > PCB Connectors > PCB Headers & Receptacles

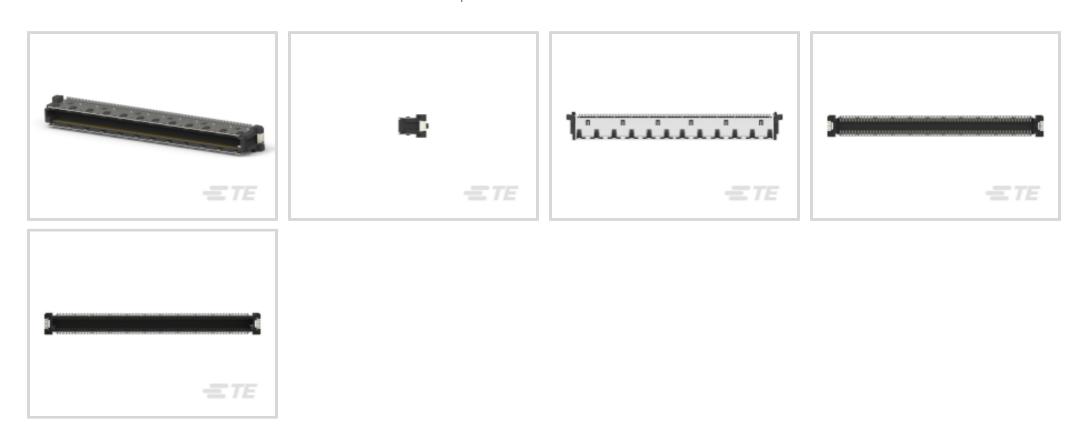

PCB Connector Assembly Type: PCB Mount Header

PCB Mount Orientation: Vertical
Connector System: Board-to-Board

Number of Positions: 220

Centerline (Pitch): .5 mm [ .02 in ]

#### **Features**

### **Product Type Features**

| Ground Feature Type               | Grounding Contact, Grounding Plate |
|-----------------------------------|------------------------------------|
| PCB Connector Assembly Type       | PCB Mount Header                   |
| Connector System                  | Board-to-Board                     |
| Connector & Contact Terminates To | Printed Circuit Board              |
| Configuration Features            |                                    |
| Stackable                         | Yes                                |
| PCB Mount Orientation             | Vertical                           |
| Number of Positions               | 220                                |

## **Electrical Characteristics**

Board-to-Board Configuration

| Dielectric Withstanding Voltage (Max) | 200 VAC |
|---------------------------------------|---------|
| Insulation Resistance                 | 2 ΜΩ    |
| Operating Voltage                     | 50 VAC  |

Parallel

### **Body Features**



| Primary Product Color                                   | Black                          |
|---------------------------------------------------------|--------------------------------|
| Contact Features                                        |                                |
| Contact Mating Area Length                              | 1 mm, 1.3 mm                   |
| PCB Contact Termination Area Plating Material Thickness | 1 μm[39.37 μin]                |
| Contact Layout                                          | Inline                         |
| PCB Contact Termination Area Plating Material           | Tin                            |
| Contact Base Material                                   | Copper Alloy                   |
| Contact Mating Area Plating Material                    | Gold                           |
| Contact Mating Area Plating Material Thickness          | .2 μm[8 μin]                   |
| Contact Type                                            | Pin                            |
| Contact Current Rating (Max)                            | .5 A                           |
| Termination Features                                    |                                |
| Rectangular Termination Post & Tail Thickness           | .2 mm[.008 in]                 |
| Rectangular Termination Post & Tail Width               | .71 mm[.028 in]                |
| Termination Method to PCB                               | Surface Mount                  |
| Mechanical Attachment                                   |                                |
| PCB Mount Alignment Type                                | Locating Posts                 |
| PCB Mount Retention Type                                | Solder Peg                     |
| Mating Alignment                                        | With                           |
| Mating Alignment Type                                   | Polarization                   |
| PCB Mount Retention                                     | With                           |
| PCB Mount Alignment                                     | With                           |
| Connector Mounting Type                                 | Board Mount                    |
| Housing Features                                        |                                |
| Centerline (Pitch)                                      | .5 mm[.02 in]                  |
| Housing Material                                        | High Temperature Thermoplastic |
| Dimensions                                              |                                |
| Connector Height                                        | 7.45 mm[.293 in]               |
| Stack Height                                            | 8 mm, 12 mm[.472 in]           |
|                                                         | .2 in                          |
| Usage Conditions                                        |                                |
| Operating Temperature Range                             | -40 - 85 °C[-40 - 185 °F]      |
|                                                         |                                |



#### Operation/Application

| Circuit Application    | Signal   |
|------------------------|----------|
| Industry Standards     |          |
| UL Flammability Rating | UL 94V-0 |
| Packaging Features     |          |
| Packaging Quantity     | 30       |
| Packaging Method       | Tray     |

### **Product Compliance**

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                  |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per<br>homogenous material. Also BFR/CFR/PVC<br>Free                                |
| Solder Process Capability                     | Reflow solder capable to 245°C                                                                                           |

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**







TE Part # 9-6318491-6 .5FHP08H,220,S,GIG,08/Sn,HT,NSYes, W/C







TE Part # 3-2040713-6 .5FHP08H,220,S,GIG,30/Sn,TR,NS



TE Part # 3-1939755-6 .5FHR04H,220,S,GIG,30/Sn,HT,NS




TE Part # 9-1939756-6 .5FHP08H,220,S,GIG,30/Sn,HT,NS,WC



TE Part # 3-1939756-6 .5FHP08H,220,S,GIG,30/Sn,HT,NS



TE Part # 3-2040714-6 .5FHR04H,220,S,GIG,30/Sn,TR,NSYes

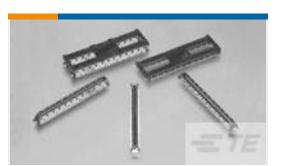

TE Part # 9-1827253-6 .5FHP05H,220,S,GIG,30/Sn,HT,NSYes

## Also in the Series | Free Height



PCB Headers & Receptacles(752)

# Customers Also Bought





TE Part #2227303-1 CAGE ASSEMBLY, SFP, .140 SOLDE



TE Part #3-6318490-6 .5FHR04H,220,S,GIG,08/Sn,HT,NSYes



TE Part #1-1123724-2 3.96EP HDR ASSY 2(3)P NATURAL









TE Part #YW324TZ11-23PN-151
RECEPT ASSY.JAM NUT. PCB. Z/N.

#### **Documents**

#### **CAD Files**

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_8-6318491-6\_C1.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_8-6318491-6\_C1.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_8-6318491-6\_C1.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

#### Datasheets & Catalog Pages

**COM Connectors Brochure (English)** 

English

## **Product Specifications**

**Product Specification** 

English

0.5mm Pitch Board to Board Connector, Free Height Type

English