

6

5



4

3

2

1

MATERIAL NUMBER	ENGINEERING PART NUMBER	FINISHED LENGTH
1200980198	MM3S60PP4M010	3.28' +2.19" -0 [1.0M +55.6 -0]
1200980118	MM3S60PP4M050	16.40' +6.50" -0 [5.0M +165.1 -0]

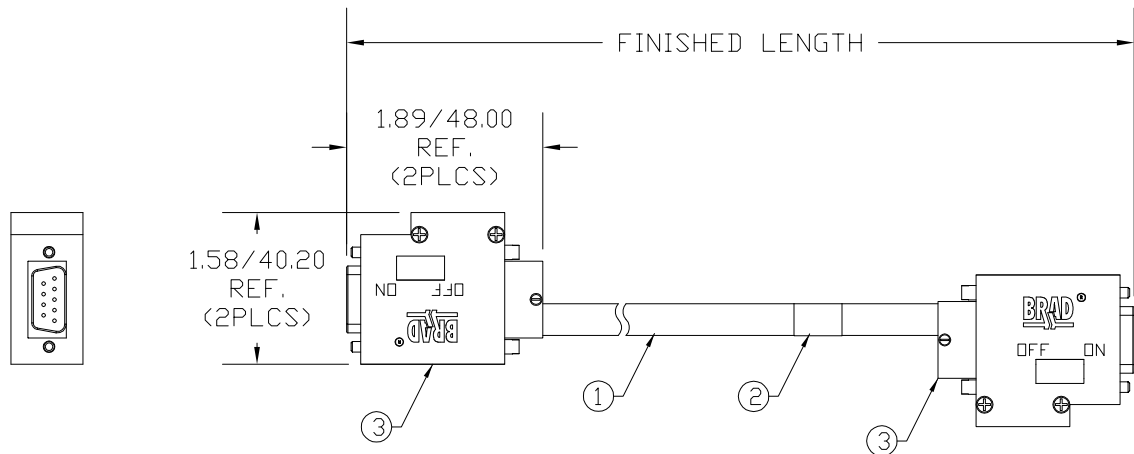

D-SUB FACE VIEW

Pin	Wiring	Pin
9	NOT CONNECTED	9
8	GREEN (LINE A)	8
7	NOT CONNECTED	7
6	NOT CONNECTED	6
5	NOT CONNECTED	5
4	NOT CONNECTED	4
3	RED (LINE B)	3
2	NOT CONNECTED	2
1	NOT CONNECTED	1

WIRING DIAGRAM

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	4 AMPS
PROTECTION FOR D-SUB	IP40
OPERATING TEMPERATURE	-20°C TO 80°C

ITEM	COMPONENT	MATERIAL	FINISH
1	CABLE- 22 AWG, COPPER STRANDING TWISTED PAIR SHIELD WITH BRAID	PUR	PURPLE
2	LABEL	MLYAR	BLACK/YELLOW
3	D-SUB	ABS	BLACK

RLSD DRAWING
 EC NO: WNA2010-0143
 DRWN: TWOLDEGE 8/27/09
 CHKD: BWOODMAN
 APPR: JFMURPHY 2009/08/28
 REV: A

QUALITY SYMBOLS
 $\nabla=0$
 $\nabla/C=0$

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±---
2 PLACES	±---	±.01
1 PLACE	±0.3	±---

ANGULAR ±--°
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE IN/MM
 DRAWN BY DATE
TWOLDEGE 2009/08/26
 CHECKED BY DATE
BWOODMAN 2009/08/26
 APPROVED BY DATE
JFMURPHY 2009/08/27
 MATERIAL NO.
SEE CHART
 SIZE **A**

SCALE ---
 DESIGN UNITS ----
 THIRD ANGLE PROJECTION

TITLE
 MICRO-CHANGE PROFIBUS
 9P HORIZ-HORIZ DSUB-DSUB
 PUR CABLE

MOLEX INCORPORATED
 DOCUMENT NO. **SD-120098-025**
 SHEET NO. **1 OF 1**

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

6

5

4

3

2

1