

AMP | AMP CPC TE Internal #: 1977888-1 Housing, 250 VDC, Wire-to-Wire, 3 Position, Sealable, Wire & Cable, Receptacle, Reverse Gender, Socket, AMP CPC, Circular Power Connectors

#### View on TE.com >



#### Connectors > Power Connectors > Circular Power > Circular Power Connectors > Environmentally Sealed Circular Connector, CPC Series 5



Connector Product Type: Housing

Operating Voltage: 250 VDC

Connector System: Wire-to-Wire

Number of Positions: 3

Sealable: Yes

#### All Environmentally Sealed Circular Connector, CPC Series 5 (8)

## Features

### Product Type Features

Connector Seal & Plug Type	Peripheral, Wire Entry Seal						
Connector Product Type	Housing						
Connector System	Wire-to-Wire						
Sealable	Yes						
Connector & Contact Terminates To	Wire & Cable						
Connector & Housing Type	Receptacle						
Circular Connector Shell Type	All Plastic						
Configuration Features							
Reverse Numbering	Without						
Number of Positions	3						
Number of Power Positions	3						
Number of Signal Positions	0						

Housing, 250 VDC, Wire-to-Wire, 3 Position, Sealable, Wire & Cable, Receptacle, Reverse Gender, Socket, AMP CPC, Circular Power Connectors



### **Electrical Characteristics**

Operating Voltage	250 VAC					
Contact Features						
Reverse Gender	Yes					
Contact Type	Socket					
Contact Protection	With					
Mechanical Attachment						
Mating Alignment Type	Keyed					
Mating Alignment	With					
Panel Mount Feature Type	Flange with Mounting Holes					
Mating Retention Type	Threaded Coupling					
Thread Size	15/16-20 UNEF – 2A					
Polarization Code	A					
Connector Mounting Type	Panel Mount					
Mating Retention	With					
Panel Mount Feature	With					

## Housing Features

Body Orientation	Straight						
Housing Color	Black						
Housing Material	Nylon (UV Resistant)						
Circular Connector Shell Size	17						
Dimensions							
Compatible Insulation Diameter Range	2.41 – 5.21 mm[.095 – .205 in]						
Usage Conditions							
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]						
Fluid Resistance	Immersion						
Operation/Application							
Circuit Application	Power & Signal						
Shielded	No						
Industry Standards							
UL Flammability Rating	UL 94V-0						
Packaging Features							

**C** For support call+1 800 522 6752

Housing, 250 VDC, Wire-to-Wire, 3 Position, Sealable, Wire & Cable, Receptacle, Reverse Gender, Socket, AMP CPC, Circular Power Connectors



Packaging Quantity	24							
Packaging Method	Package							
Product Compliance								
For compliance documentation, visit the product page on TE.com>								
EU RoHS Directive 2011/65/EU	Compliant							
EU ELV Directive 2000/53/EC	Compliant							
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold							
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE							
	2024 (241) Does not contain REACH SVHC							
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free							
Solder Process Capability	Not applicable for solder process capability							

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**




Housing, 250 VDC, Wire-to-Wire, 3 Position, Sealable, Wire & Cable, Receptacle, Reverse Gender, Socket, AMP CPC, Circular Power Connectors





# Also in the Series | AMP CPC

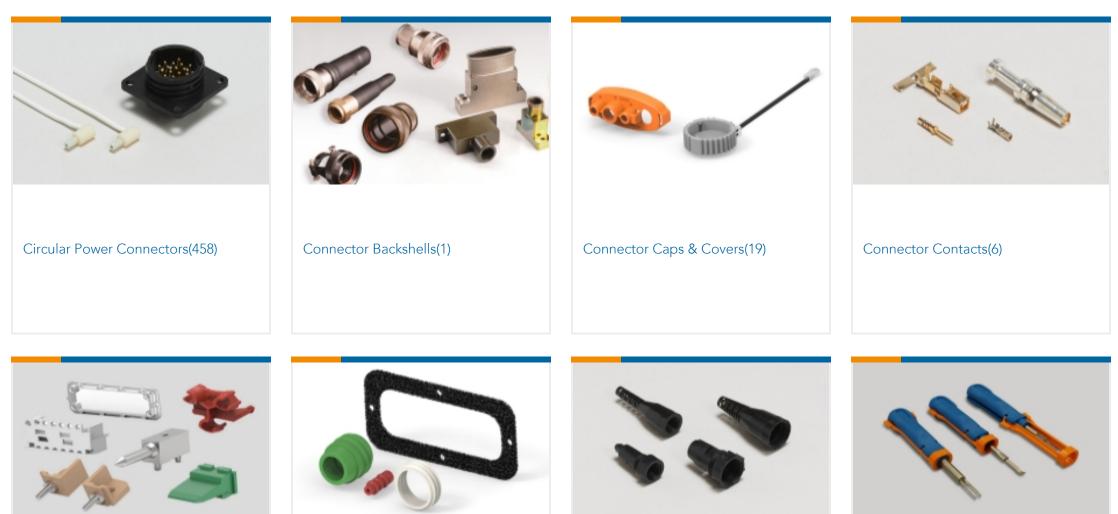

Connector Hardware(12)	Connector Seals & Cavity Plugs(36)	Connector Strain Relief(60)	Insertion & Extraction Tools(1)



# Customers Also Bought



Housing, 250 VDC, Wire-to-Wire, 3 Position, Sealable, Wire & Cable, Receptacle, Reverse Gender, Socket, AMP CPC, Circular Power Connectors



## Documents

Product Drawings CPC 17-3 RCPT ASY, REV SEX, UV RESIST

English

### **CAD** Files

## 3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_1977888-1\_C.2d\_dxf.zip English Customer View Model ENG\_CVM\_CVM\_1977888-1\_C.3d\_igs.zip English

Customer View Model ENG\_CVM\_CVM\_1977888-1\_C.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Product Specification

English