

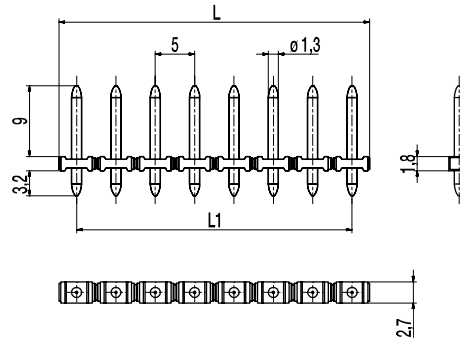


971-SLR-THR-1,3

Pin strip for THR
Soldering/plug-in area \varnothing 1,3 mm



PCB LAYOUT



L1 = (No. of poles - 1) x pitch
Solder paste thickness: 0,15 - 0,2 mm
Solder pad diameter: \varnothing 2,5 mm

GENERAL INFORMATION

Pitch	5 mm
No. of poles	2 - 12
Usable with	plug connectors of series 115-F, 950-FL-DS, 950-TFL-DS, 950-NAF-DS, 950-GFL-DS, 950-NLFL-DS, 950-RFL-DS

TECHNICAL DATA

Overvoltage Category	III	III	II
Pollution Severity Level	3	2	2
Rated Voltage	250 V	320 V	630 V
Rated Impulse Voltage	4 kV	4 kV	4 kV
Rated Insulation Voltage	250 V acc. to EN 60998-1		
Rated Current	10 A		
Soldering process	Wave solder & reflow solder		
Hole in PCB	\varnothing 1,6 mm		
PCB thickness	Wave solder max. 1,6 mm; reflow solder 1,6 - 3,2 mm		

APPROVALS

	Current [A]	Voltage [V]	Group	AWG	[Nm]
	10 [1]	300	B		
	10 [1]	300	B		

MATERIAL

Moulding	PA HT, black, V-0
Comparative Tracking Index	CTI \geq 600
Insulating Group	I
Temperature Range	-40°C up to 120°C; reflow solder temperature peak max. 255°C acc. to DIN EN 61760-1
Solder pin	\varnothing 1,3 mm; tin plated brass

OPTIONS / ACCESSORIES

- Other plug pin lengths on request
- Other solder pin surfaces on request

[1] Above headers with 1.0 or 1.1 mm dia. pins are rated 12A max. with manufacturer's Cat. No. 120-W-111 terminal blocks. Above headers with 1.1 mm or 1.3 mm dia. pins are rated 12A max. with 115-F-111, 115-F-211 and 115-F-118 terminal blocks.

[1] By using 115-F current of 12 A possible

CONFIGURATIONS

Poles	Part number	Article number	Length (L)	Packaging	PU	Tape Width	Tape Height
2	971-SLR-THR-1,3/02	12.893.805	9,50 mm	Box	1000		
3	971-SLR-THR-1,3/03	13.893.805	14,50 mm	Box	500		
4	971-SLR-THR-1,3/04	14.893.805	19,50 mm	Box	500		
5	971-SLR-THR-1,3/05	15.893.805	24,50 mm	Box	250		
6	971-SLR-THR-1,3/06	16.893.805	29,50 mm	Box	250		
2	971-SLR-THR-1,3/02-T&R	12.893.805.A00	9,50 mm	Tape-on-Reel	500	32 mm	15,9 mm
3	971-SLR-THR-1,3/03-T&R	13.893.805.A00	14,50 mm	Tape-on-Reel	500	32 mm	15,9 mm
4	971-SLR-THR-1,3/04-T&R	14.893.805.A00	19,50 mm	Tape-on-Reel	500	56 mm	15,9 mm
5	971-SLR-THR-1,3/05-T&R	15.893.805.A00	24,50 mm	Tape-on-Reel	500	56 mm	15,9 mm
6	971-SLR-THR-1,3/06-T&R	16.893.805.A00	29,50 mm	Tape-on-Reel	500	56 mm	15,9 mm

further number of poles on request

