


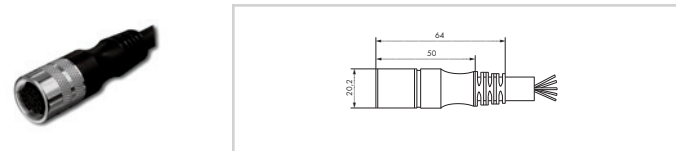


<p>14-pole</p>	Pin A, L: 0.75 mm <sup>2</sup>	
	Pin C - J, N - T: 0.34 mm <sup>2</sup>	
	A brown	N pink-brown
	C white-pink	O violet
	E black	P white
	G pink	R red
	J green	S gray
	L blue	T yellow
	M commoned with A	U commoned with L

Operating voltage	150 V
Operating current	6 A (0.75 mm <sup>2</sup> ); 4 A (0.34 mm <sup>2</sup> )
Rated surge voltage	1.2 kV
Suitable for drag chain applications	≥ 2 Mio. bending cycles
Ambient temperature (operation) moved	-30 ... +90 °C
Protection type	IP67
Cable diameter	9.1 mm ± 0.2





Interconnecting cable, 14-pole, M16 socket straight		
Cable length	Item No.	Pack. Unit
5 m	756-3205/140-050	1
10 m	756-3205/140-100	1
15 m	756-3205/140-150	1

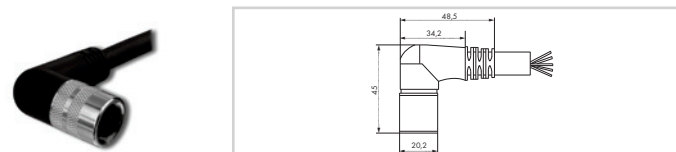



Interconnecting cable, 14-pole, M16 socket right angle		
Cable length	Item No.	Pack. Unit
5 m	756-3206/140-050	1
10 m	756-3206/140-100	1
15 m	756-3206/140-150	1

<p>12-pole</p>	Pin 9, 11, 12: 1.00 mm <sup>2</sup> ; Pin 1 - 8: 0.34 mm <sup>2</sup>	
	1 white	7 black
	2 green	8 violet
	3 yellow	9 blue
	4 gray	10 commoned with 9
	5 pink	11 brown
	6 red	12 green-yellow

Operating voltage	300 V
Operating current	8 A
Rated surge voltage	AC 2.5 kV
Suitable for drag chain applications	≥ 2 Mio. bending cycles
Ambient temperature (operation) moved	-5 ... +80 °C
Protection type	IP67
Cable diameter	8.6 mm ± 0.3

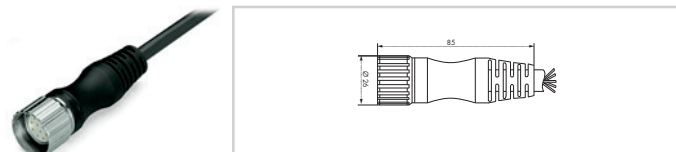



Interconnecting cable, 12-pole, M23 socket straight		
Cable length	Item No.	Pack. Unit
5 m	756-3201/120-050	1
10 m	756-3201/120-100	1
15 m	756-3201/120-150	1

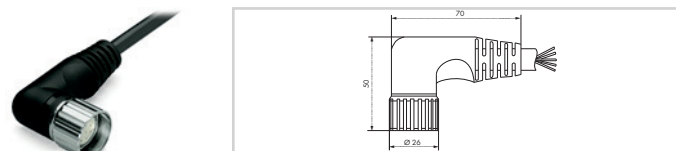



Interconnecting cable, 12-pole, M23 socket right angle		
Cable length	Item No.	Pack. Unit
5 m	756-3202/120-050	1
10 m	756-3202/120-100	1
15 m	756-3202/120-150	1

<p>19-pole</p>	Pin 6, 12, 19: 1.00 mm <sup>2</sup> ;		
	Pin 1 - 5, 7 - 11, 13 - 19: 0.34 mm <sup>2</sup>		
	1 violet	8 white-green	15 white
	2 red	9 white-yellow	16 yellow
	3 gray	10 white-gray	17 pink
	4 red-blue	11 black	18 gray-brown
	5 green	12 green-yellow	19 brown
	6 blue	13 yellow-brown	
	7 gray-pink	14 brown-green	

Operating voltage	300 V
Operating current	10 A (Contacts 6, 12, 19); 8 A (other contacts)
Rated surge voltage	AC 2.5 kV
Suitable for drag chain applications	≥ 2 Mio. bending cycles
Ambient temperature (operation) moved	-5 ... +80 °C
Protection type	IP67
Cable diameter	9.7 mm ± 0.3

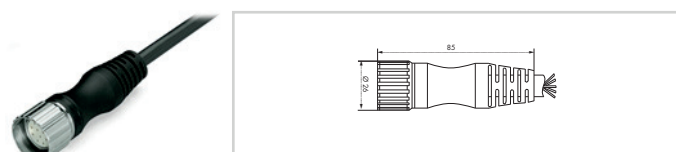

Interconnecting cable, 19-pole, M23 socket straight		
Cable length	Item No.	Pack. Unit
5 m	756-3203/190-050	1
10 m	756-3203/190-100	1
15 m	756-3203/190-150	1

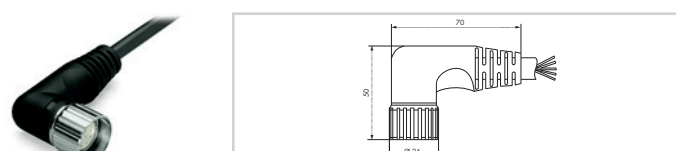

Interconnecting cable, 19-pole, M23 socket right angle		
Cable length	Item No.	Pack. Unit
5 m	756-3204/190-050	1
10 m	756-3204/190-100	1
15 m	756-3204/190-150	1