
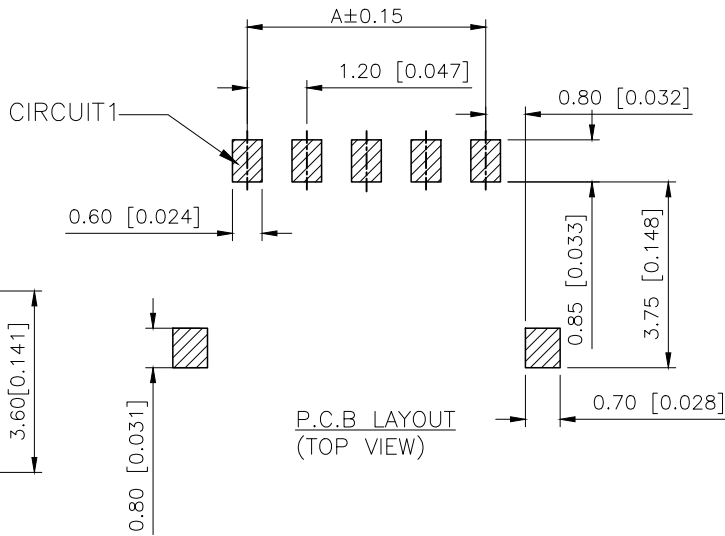
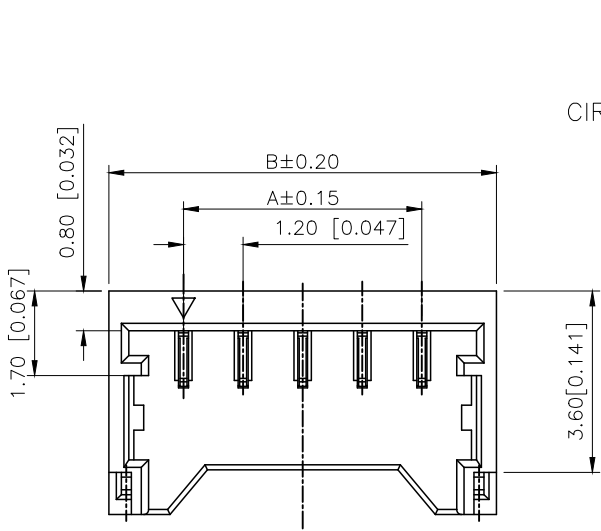



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE		
A1	N/A		图面升级整理图面	2024.09.02	阿树

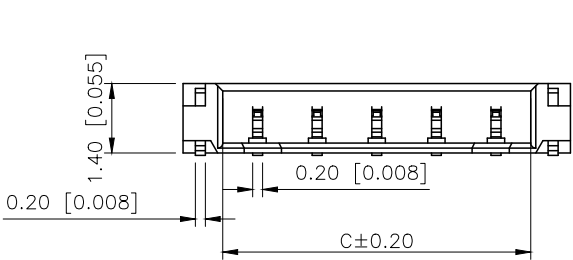

■SPECIFICATIONS

- Voltage rating:50V AC/DC
- Current rating:2A AC/DC
- Withstanding Voltage:500V AC/minute
- Temperature range:-40°C~+125°C
- Insulation resistance:≥100MΩ
- Contact resistance:≤20mΩ
- After environmental testing:≤40mΩ

PART NO.:

X1224 W R S-XX-LP V01
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
②Category:W-Wafer
③Welding Board Angle:R-Straight 90°
④Welding Way:S-SMT
⑤Row No.Pin No:XX-02~10Pin
⑥Material:LP-LCP 94V-0;4T-PA4T
⑦Planting Category: V01-Gold Flash

Poles	Dimensuons(mm)		
	A	B	C
02	1.20	4.20	2.65
03	2.40	5.40	3.85
04	3.60	6.60	5.05
05	4.80	7.80	6.25
06	6.00	9.00	7.45
07	7.20	10.20	8.65
10	10.80	13.80	12.25

X1224WRS-XX-4TV01	PA4T UL 94V-0	Phosphor Bronze	Gold-Flash	X1224H
X1224WRS-XX-LPV01	LCP UL 94V-0	Phosphor Bronze	Gold-Flash	
PART NO	Material	Material(Pin And Solder Tabs)	Finish(Pin And Solder Tabs)	Suitable XKB Terminal

ANGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 1.20mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X1224WRS-XX-LPV01
APPROVED		SIZE: A4	DWG NO.: