



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.11.30	阿树

A

B

C

D

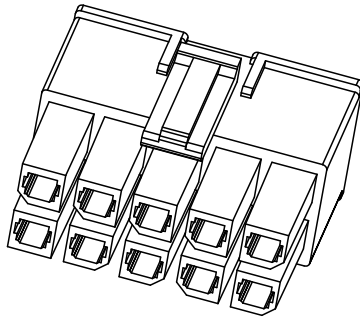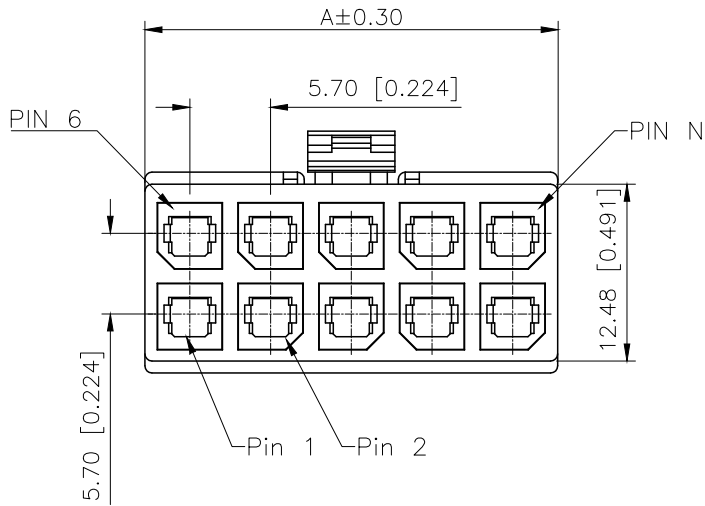




Specifications:
Voltage rating:600V AC/DC
Current rating:23A AC/DC
Withstanding voltage:2200V AC/minute
Temperature range:−40℃+125℃
Insulation resistance:≥1000MΩ
Contact resistance:≤2mΩ

PART NO.:


X5700 H-2xXX-N0
① ② ③ ④

- ①Series No
- ②Category:H-HSG
- ③Row No.Pin No:2xXX-2x01~2x06Pin
- ④Material:N0-PA66 UL94V-0

Poles	Dimensions(mm)
	A
2x01	8.35
2x02	12.05
2x03	17.75
2x04	23.45
2x05	29.15
2x06	34.85

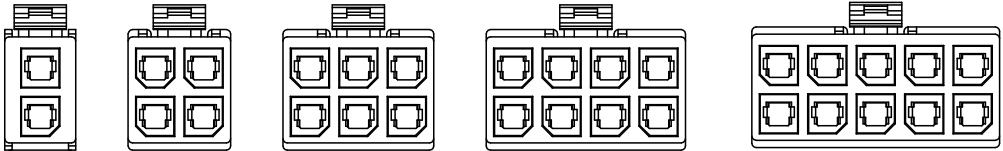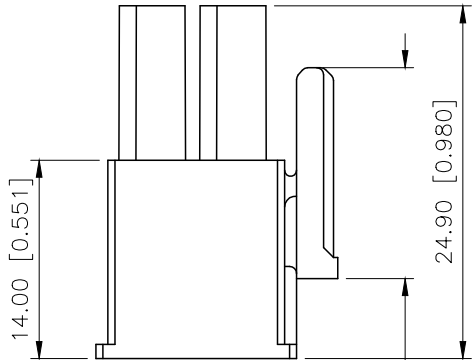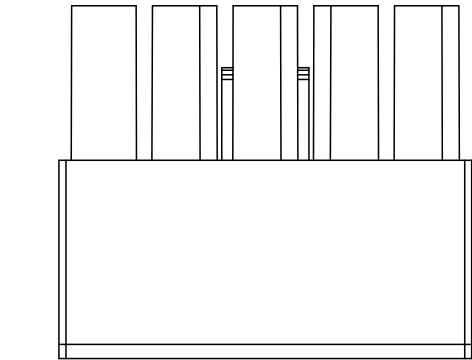

2x01P 2x02P 2x03P 2x04P 2x05P



2x06P

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	Wire to board connector
CHECKED		UNIT:	mm/in	PART NO.:	X5700WR-2xXX-LPSW
APPROVED		SIZE:	A4	DWG NO.:	

SCALE	PAGE	REVISION
N/A	1/1	A1