


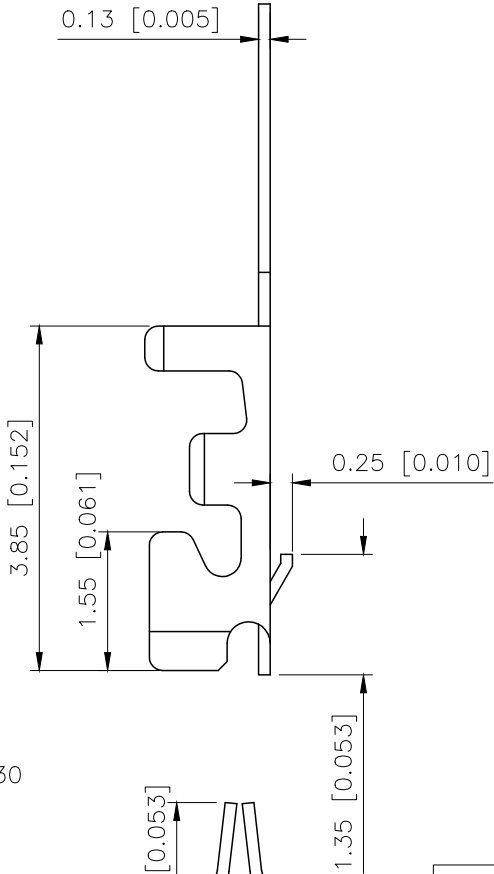



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE		
A1	N/A		图面升级整理图面	2024.09.02	阿树

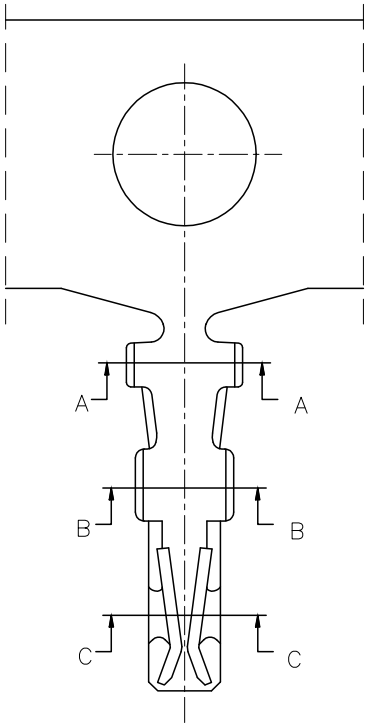

A-A



B-B



C-C

■SPECIFICATIONS

- Voltage rating:50V AC/DC
- Current rating:1A AC/DC
- Withstanding Voltage:500V AC/minute
- Temperature range:-40°C~+125°C
- Insulation resistance:≥100MΩ
- Contact resistance:≤20mΩ

PART NO.:

X1002 T-P SN2
① ② ③ ④

- ①Series No
②Category:T-Terminal
③Material:P-Phosphor bronze
④Plating Style:
V01-All Gold Flash
SN-Bright tin plating 70u";30u" Ni
SN2-50u" Ni Min,120u" Tin Min

X1002T-PV03-E	Phospho Bronze	AWG#28-32	0.80mm	Stamping Before Plating:30-50u" Ni;Whole Gold :3u" Min	X1002H
X1002T-PV01-E				Stamping Before Plating:30-50u" Ni;Whole Gold:Gold Flash	
X1002T-PSN2-E				Stamping Before Pating:50u" Min Ni;120u"Sn Min	
X1002T-PSN-E				Stamping Before Plating:30-50u" Ni;70-120u"Sn	
PART No	Material	Wire Range	Insulation O.D.	Finish	Suitable XKB Terminal

ANGULAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN
CHECKED
APPROVED

阿树

VIEW:
UNIT: mm/in
SIZE: A4

MODEL TYPE:
1.0mm Crimp Style Connectors
PART NO.:
X1002T-PSN2
DWG NO.: