

Product summary

NEO-D9S



u-blox D9 correction data receiver

First mass-market L-band GNSS correction module

- Access to centimeter-level GNSS corrections globally
- Freedom to select GNSS correction data delivery channel
- High scalability for industrial and automotive applications
- Allows selection of desired L-band GNSS correction service
- Easy and seamless integration with u-blox F9 receivers



12.2 × 16.0 × 2.4 mm



Product description

NEO-D9S is a satellite data receiver for L-band correction broadcast that can be configured for use with a variety of correction services. It decodes the satellite transmission and outputs a correction stream, enabling a high precision GNSS receiver to reach accuracies down to centimeter level. Depending on the capabilities of the receiver used, it can consume the data output by NEO-D9S as is, or external preprocessing on the host might be needed. By providing an independent correction data stream delivered via satellite L-band, NEO-D9S ensures high availability of the position output and decreases dependency on cellular connectivity for correction service delivered via IP. Granting access to a broadcast data stream, NEO-D9S allows virtually infinite scalability, eliminating the need for a dedicated delivery channel per user. This makes NEO-D9S flexible for use in various markets and applications.

NEO-D9S is configurable for use with correction data of various providers and service levels. This ensures high precision in multiple regions globally, as well as coverage across continents.

NEO-D9S can be easily integrated with a variety of high precision GNSS receivers from the u-blox F9 platform, which allows a complete high precision solution to be built with less design effort. For more information about the u-blox F9 products, refer to the u-blox website.

In addition, NEO-D9S can be integrated in any high precision GNSS system that uses L-band correction delivery.

NEO-D9S implements u-blox security principles and advanced security features including signature and anti-jamming mechanisms, thus allowing reliable GNSS positioning in end-user products.

This L-band receiver is in the u-blox NEO form factor.

	NEO-D9S-00A	NEO-D9S-00B
Grade		
Automotive	•	
Professional		•
Standard		
GNSS		
Satellite L-band	•	•
Concurrent signals	1	1
Interfaces		
UART	2	2
USB	1	1
SPI	1	1
DDC (I2C compliant)	1	1
Features		
Programmable (flash)	•	•
Additional SAW filter	•	•
RTC crystal	•	•
Oscillator	T	T
Active antenna / LNA supply	•	•
Power supply		
2.7 V – 3.6 V	•	•


T = TCXO



Features

Receiver type	u-blox D9 correction data receiver	
Time to first fix	Initial acquisition at 2400 bit/s	<10 s
Acquisition sensitivity	For BER < 10e-5 at 2400 bit/s	-133 dBm
Oscillator	TCXO	
Frequency bands	1525 - 1559 MHz	
Memory	Flash	
Supported antennas	Active	
Anti-jamming	Active CW detection and removal Onboard SAW band pass filter	

High precision GNSS architecture

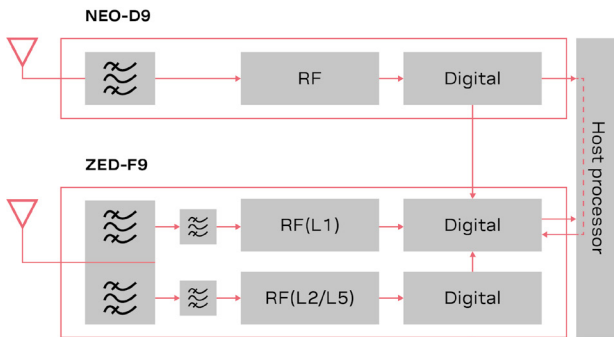

Interfaces

Serial interfaces	2 UARTs 1 USB 1 SPI 1 DDC (I2C compliant)
Protocols	UBX
Digital I/O	1 EXTINT input for Wakeup

Electrical data

Supply voltage	2.7 V to 3.6 V
Power consumption	
NEO-D9S-00B	35 mA at 3.0 V (average)
NEO-D9S-00A	55 mA at 3.0 V (average)

Further information

For contact information, see www.u-blox.com/contact-u-blox.
For more product details and ordering information, see the product data sheet.

Package

24-pin LCC (Leadless Chip Carrier)
12.2 x 16.0 x 2.4 mm, 1.6 g

Environmental data, quality, and reliability

	NEO-D9S-00A	NEO-D9S-00B
Operating temp.	-40 °C to +105 °C	-40 °C to +85 °C
Storage temp.	-40 °C to +105 °C	-40 °C to +85 °C
Qualification	Professional-grade modules qualified according to ISO 16750 Automotive-grade modules qualified according to AEC-Q104	

RoHS compliant (2015/863/EU)

Green (halogen-free)

EU Radio Equipment Directive compliant 2014/53/EU

Manufactured and fully tested in ISO/TS 16949 certified production sites

High vibration and shock resistance

Based on u-blox chips qualified according to AEC-Q100

Compatible u-blox products and services

GNSS products	ZED-F9P high precision GNSS module ZED-F9R high precision dead reckoning module ZED-F9K high precision dead reckoning module for automotive markets
Location services	PointPerfect GNSS augmentation service

Support products

Evaluation kits provide reference design, and allow efficient integration and evaluation of u-blox positioning technology.

C101-D9S	NEO-D9S application board, allowing NEO-D9S module to be evaluated as a stand-alone module or combined with a suitable u-blox evaluation board, for example, C099-F9P or C100-F9K
----------	---

Product variants

NEO-D9S-00A	u-blox D9 correction data receiver with satellite L-band raw output, automotive grade
NEO-D9S-00B	u-blox D9 correction data receiver with satellite L-band raw output, professional grade

Legal Notice:

u-blox or third parties may hold intellectual property rights in the products, names, logos and designs included in this document. Copying, reproduction, or modification of this document or any part thereof is only permitted with the express written permission of u-blox. Disclosure to third parties is permitted for clearly public documents only.

The information contained herein is provided "as is". No warranty of any kind, either express or implied, is made in relation to the accuracy, reliability, fitness for a particular purpose, or content of this document. This document may be revised by u-blox at any time. For most recent documents, please visit www.u-blox.com.