


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
CE	17	L3	PER ECR-13-018516	02DEC2013	HZ	RZ	

PART NUMBER	LENGTH (METERS)	
501232-1	25+0.25/-0.0	
<del>501232-2</del>	<del>50+0.5/-0.0</del>	OBSOLETE $\triangle 5$
501232-3	100+1.0/-0.0	
501232-4	1000+10/-0.0	
501232-5	NON SALEABLE PART	
<del>501232-6</del>	<del>500+5.0/-0.0</del>	OBSOLETE
<del>501232-7</del>	<del>NON SALEABLE PART</del>	OBSOLETE $\triangle 5$

- $\triangle 1$ . STEP INDEX PLASTIC OPTICAL FIBER
  - 1.1 CORE REFRACTIVE INDEX: 1.49 TYP.
  - 1.2 CLAD REFRACTIVE INDEX: 1.42 TYP
  - 1.3 NUMERICAL APERTURE: 0.46 TYP.
  - 1.4 CORE DIAMETER: 980±60um
  - 1.5 CLAD DIAMETER: 1000±60um
- $\triangle 2$ . JACKET:
  - 2.1 MATERIAL: POLYETHYLENE.
  - 2.2 COLOR: BLACK.
3. ATTENUATION AT 650nm AND 25°C:
  - 3.1 TYPICAL: 140dB/km.
  - 3.2 MAX: 150 dB/km.
4. RATINGS:
  - 4.1 OPERATING TEMPERATURE: -40°C TO +85°C.
  - 4.2 STORAGE TEMPERATURE: -40°C TO +85°C.
  - 4.3 MINIMUM BEND RADIUS: 25mm.
  - 4.4 TENSILE STRENGTH: 8kg.
  - 4.5 CABLE WEIGHT: 3.75 kg/km TYP.
- $\triangle 5$ . OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

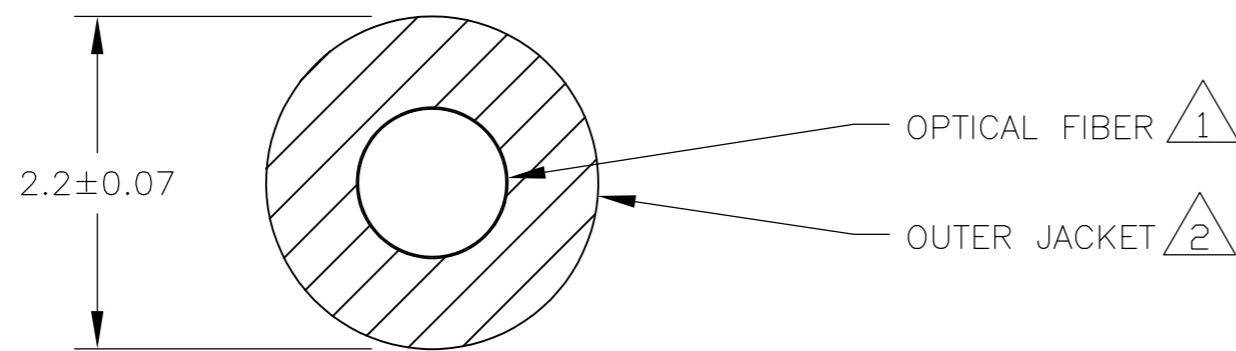

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. BROUGHTON 09SEP05	<b>TE</b> TE Connectivity	
DIMENSIONS: mm		CHK A. BROUGHTON 09SEP05		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD T. DARR 09SEP05	NAME CABLE, FIBER OPTIC, 1000um PLASTIC	
0 PLC ± -		PRODUCT SPEC	-	
1 PLC ± -		APPLICATION SPEC	-	
2 PLC ± -		WEIGHT	-	
3 PLC ± -		SCALE	A2 00779 C=501232	
4 PLC ± -		CUSTOMER DRAWING	RESTRICTED TO	
ANGLES ± -		FINISH	-	
MATERIAL		SCALE	SHEET 1 OF 1	
-		SCALE	REV L3	
-		SCALE	NTS	