

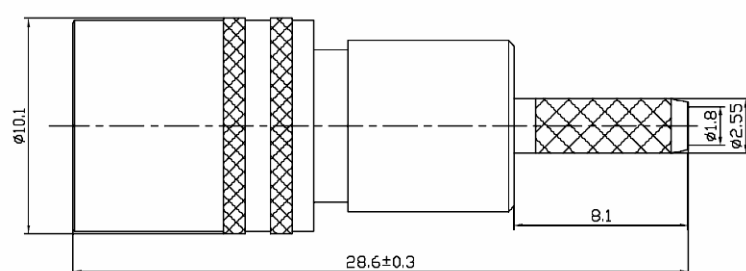


STRAIGHT CONNECTOR C-C FEMALE CRIMP TYPE**R214.083.902****CABLE 2.6/75 SINGLE SCREEN****Series : T43**

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (µm)
BODY	BRASS	NICKEL .
CENTER CONTACT	BRONZE	-
OUTER CONTACT	BRONZE	-
INSULATOR	PTFE	
GASKET	-	
OTHERS PARTS	BRASS	NICKEL .
-	-	-
-	-	-

Issue : 1132 H

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIAL 

STRAIGHT CONNECTOR C-C FEMALE CRIMP TYPE**R214.083.902****CABLE 2.6/75 SINGLE SCREEN**

Series : T43

PACKAGING

Standard	Unit	Other
20	-	Contact us

ELECTRICAL CHARACTERISTICS

Impedance	75	Ω
Frequency	0-3	GHz
VSWR	1.25* + 0,0000	x F(GHz) Maxi
Insertion loss	NA	$\sqrt{F}$ (GHz) dB Maxi
RF leakage	- (NA	- F(GHz)) dB Maxi
Voltage rating	500	Veff Maxi
Dielectric withstanding voltage	1500	Veff mini
Insulation resistance	500	M Ω mini

MECHANICAL CHARACTERISTICS

Center contact retention	
Axial force – Mating end	22 N mini
Axial force – Opposite end	NA N mini
Torque	NA N.cm mini

Recommended torque	
Mating	NA N.cm
Panel nut	NA N.cm
Clamp nut	NA N.cm
A/F clamp nut	0,0000 mm

Mating life	0 Cycles mini
Weight	7,6000 g

ENVIRONMENTAL

Operating temperature	-40/+100 °C
Hermetic seal	NA Atm.cm3/s
Panel leakage	NA

SPECIFICATION**CABLE ASSEMBLY**

Stripping	a	b	c	d	e	f
mm	4,50	8,00	21,0	0,00	16,5	0,00

Assembly instruction :

Recommended cable(s)

RG 179

RG 187

Characteristics indicated on this data sheet are those that can be achieved with the highest performance cable. Intrinsic limitations of the cable may diminish the performance of the assembly

Cable retention

- pull off	60 N mini
- torque	NA N.cm

TOOLING

Part Number	Description	Hexagon
.	.	.
R282.287.000	CRIMPING TOOL Q92316	
R282.281.010	CRIMPING TOOL MH800	
R282.265.001	CRIMPING DIES Q92441	3.25

OTHER CHARACTERISTICS

TRL REF. Q96141Z

* 0-1GHz

Issue : 1132 H

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

