




REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.11.30	阿树

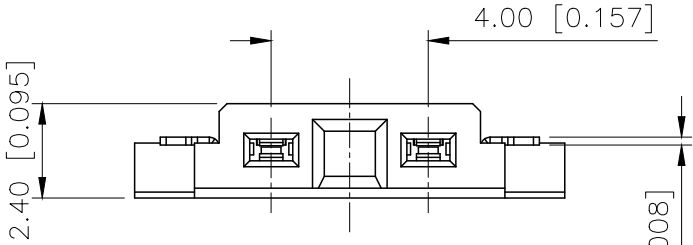

0.20 [0.008]


1.55 [0.061]
0.10

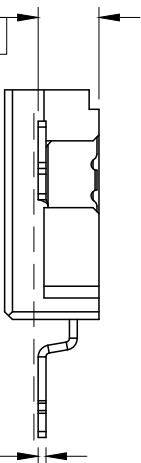

PART NO.:

X4002 W F-XX-LP SW
① ② ③ ④ ⑤ ⑥

- ①Series No
②Category:W-Wafer
③Category:F-Female
④Row No.Pin No:XX-02 Pin
⑤Material:LP-LCP UL 94V-0
⑥Plating:SW-Matte Tin

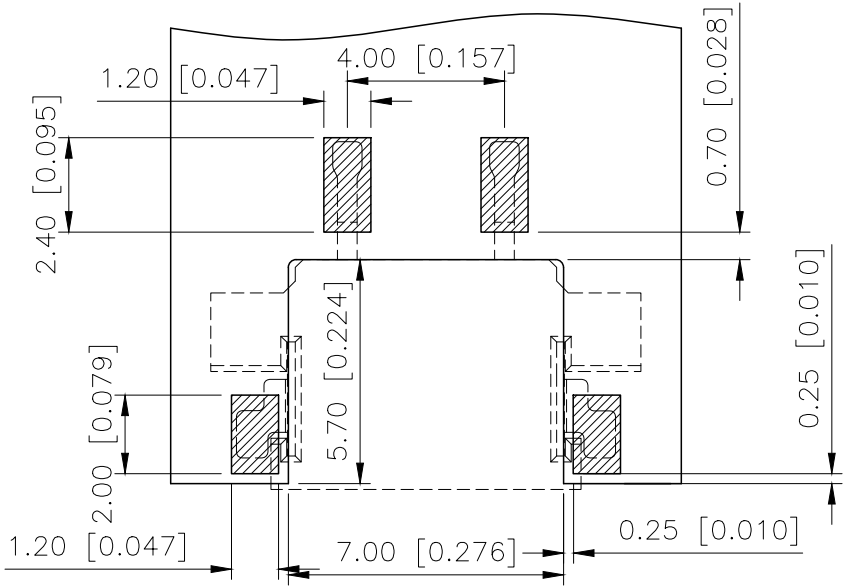

PCB LAYOUT

Specifications:

规格:

Voltage rating:400V AC/DC

额定电压: 400V AC/DC

Current rating:1A AC/DC

额定电流: 1A AC/DC

Withstanding voltage:1000V AC/minute

耐受电压: 1000V AC/分钟

Temperature range:-40℃--+125℃

温度范围: -40℃--+125℃

Insulation resistance:≥1000MΩ min

绝缘电阻: ≥1000MΩ Min

Contact resistance:≤30mΩ

接触电阻: ≤30mΩ

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 4.0mm BTB Connector
CHECKED		UNIT: mm/in	PART NO.: X4002WF-XX-LPSW
APPROVED		SIZE: A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1