

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.07.31	阿树

■SPECIFICATIONS

- Voltage rating:600V AC/DC
- Current rating:9A AC/DC
- Withstanding Voltage:1500V AC/minute
- Temperature range:-45°C+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤10mΩ
- After environmental testing:≤20mΩ

PART NO.:

X9357 W V-XX HN-N2 SN XX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ①Series No
②Category:W-Wafer
③Welding Board Angle:V-Stright 180°
④Row No.Pin No:XX-02~06Pin
⑤Special NO:HN-The hollow needke
⑥Material:N2-PA66 94V-2; N0-PA66 94V-0
⑦Planting: SN-Bright tin plating
⑧Color:Blank-natural color

Poles	Dimensions(mm)	
	A	B
02	4.20	9.60
03	8.40	13.80
04	12.60	18.00
05	16.80	22.20
06	21.00	26.40



X9357WV-XXHN-N2SN	Nylon 66 UL 94V-2	Brass	Tin-Plated	X9357H
X9357WV-XXHN-N2SN	Nylon 66 UL 94V-2			
PART NO	Material	Material(Pin)	Finish(Pin)	Suitable XKB Terminal
DESIGN	阿树	VIEW: 	MODEL TYPE: 4.20 mm Crimp Style Connectors	
CHECKED		UNIT: mm/in	PART NO.: X9357WV-XXHN-N2SN	
APPROVED		SIZE: A4	DWG NO.:	

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1

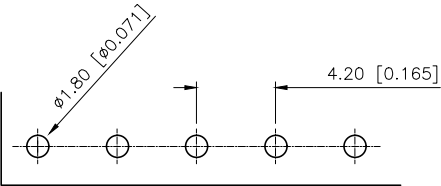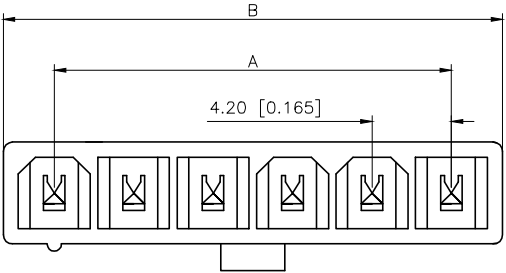

Recommand PCB Layout

