


PCB Layout (Pattern side)

Circuit Diagram

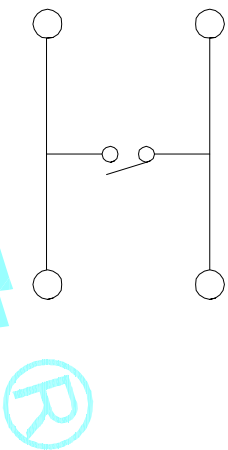

Typical Specifications :
 1. Rating : DC 12V 50mA
 2. Life: 100,000 Cycles Min.

NO.2	
PART NO	vigor
1	90±30
2	130±30
3	180±30
4	250±30
5	350±50

NO.3	
PART NO	MATERIAL/QTY
S	SUS/1PC
C	C5210/1PC
D	SUS/2PCS
F	C5210/2PCS

NO.4-NO.5	
PART NO	NOTE
01~99	SERIAL NUMBER

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑤	Terminal	—	4	Brass(0.3t)	Plating silver	—
④	Contact	—	1	F.Ag/C5210	—	—
③	Base	—	1	Nylon	Black	UL94V-0
②	Cover	—	1	SPCC	Plating Sn	—
①	Keystroke	—	1	Nylon	Black	UL94V-0

APPROVALS		DATE
DRAWN	xu qi feng	2014.11.26

CHECKED		TITLE:	
APPROVALS		TACT SWITCHS	
TOLERANCES ARE		PART NO.	K2-1103ST-AD0W-00
30~0.1±	±0.30	SCALE:	1:1
10~0.30	±0.20	DRAWING NO.	—
5~0.10	±0.15	SHEET	1 OF 1
~5	±0.10	ANGLE	±2°

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
—	A	—	NEW	—	—	—



ELECTRONICS CO., LTD