
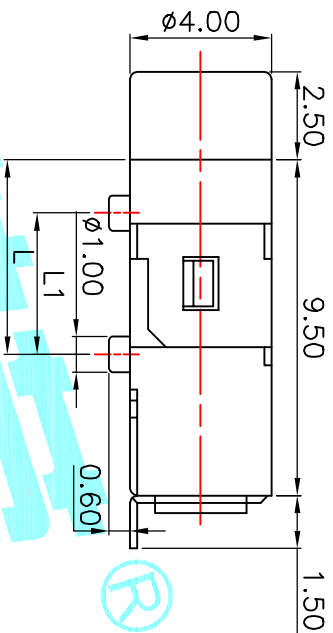


P.C. Blyayout(copper-sided view)

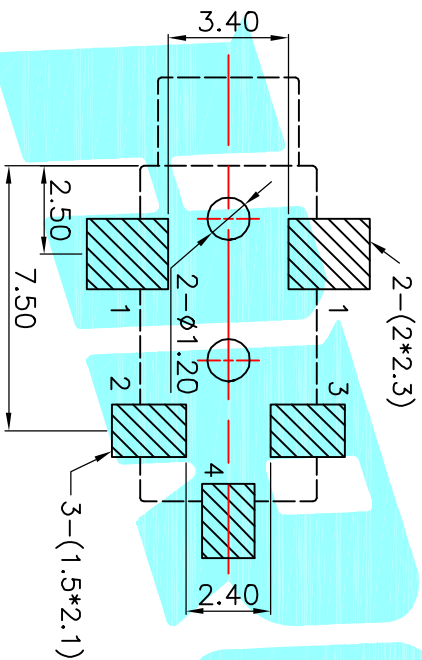

| | | |
|--------------|----------|----------|
| L=5.5 L1=4.0 | PJ-203-A | PJ-203-B |
| Schematic | | |
| L=5.5 L1=4.0 | PJ-203-G | |
| Schematic | | |

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

| | | | | | | |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------|--------------------|---------|--------|--------|
| ECN NO. | REV. | DATE. | DESCRIPTION. | CHANGE. | CHECK. | APPRO. |
| | A | | NEW | | | |
| <p>DRAWN J.X.Zhang 2013/11/11</p> <p>CHECKED</p> <p>APPROVALS</p> <p>TOLERANCES ARE 30^{±0.1} 10^{±0.30} 5^{±0.10} ~ 5 ±0.10 ±0.15 ±0.10</p> | | | | | | |
| TITLE: PHONE JACKES | | | PART NO. PJ-203 | | | |
| DRAWN J.X.Zhang 2013/11/11 | | | DATE | | | |
| ELECTRONICS CO.,LTD | | | MATERIAL Nylon | | | |
| PHOSPHOR BRONZE Au Plating | | | FINISHING Black | | | |
| REMARK | | | REMARK | | | |
| SCALE: 1:1 | | | PROJ. SHEET 1 OF 1 | | | |