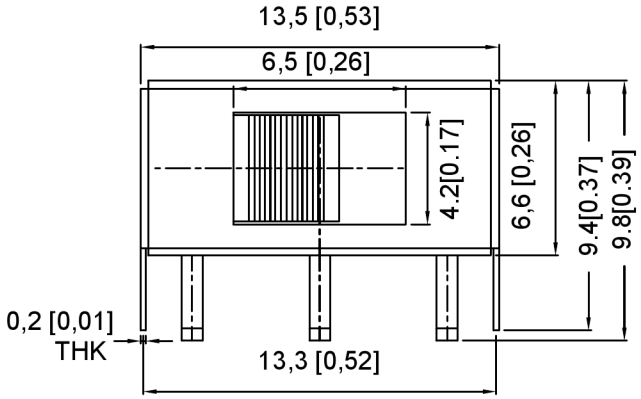

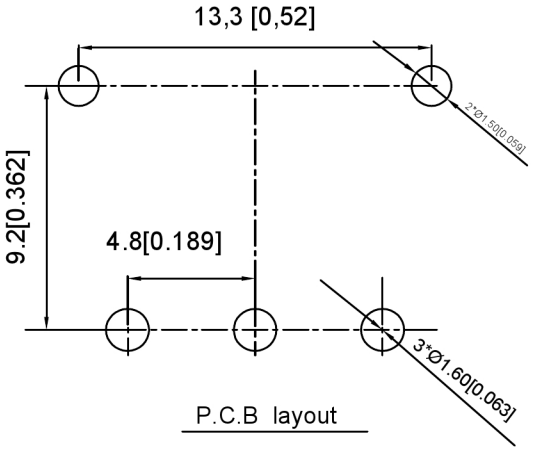

P.C.B layout

MODEL CODE

SS-12D11 X X X

Knob Type	H(mm)	Colour
L	2~12	Blank:Standard Black
G		R:Red

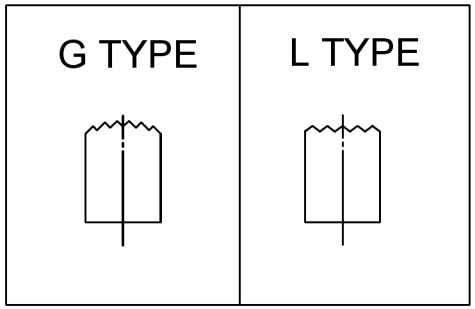

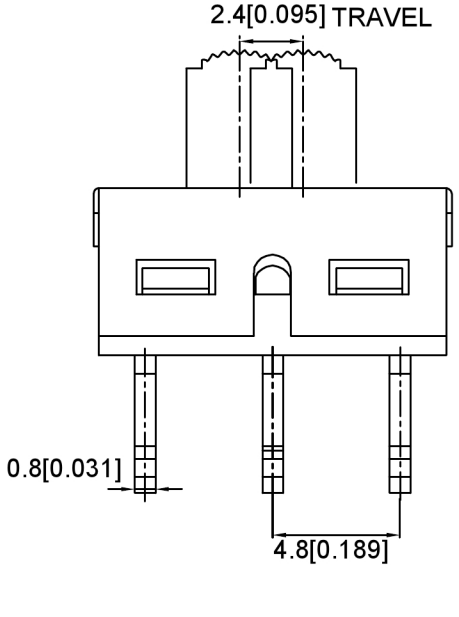

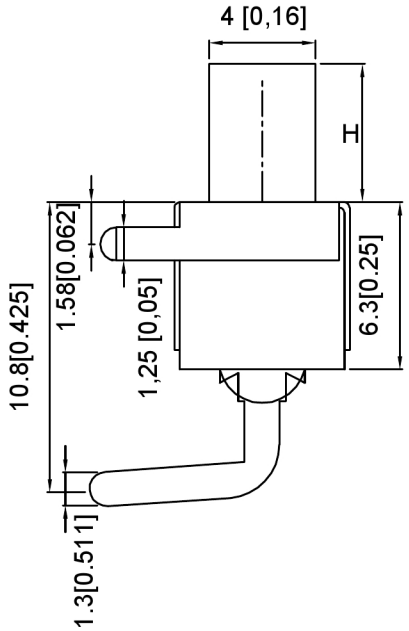



Schematic(Shorting)

Typical Specifications

1.Rating:AC 125V 3A
2.Insulation Resistance:1,000M min
3.Dielectric strength:1,500V RMS
4.Operating Life: 10,000 cycles

ITEM	PAPT NAME	TER,NO	QTY	MATERIAL	FINISHING	REMARK
⑤	Terminal	——	3	Copper Alloy	silver plated	————
④	Contact	——	1	Copper Alloy	silver plated	————
③	Housing	——	1	Stainless Steel		————
②	Slide Handle	——	1	Nylon		————
①	Case	——	1	Diallyl Phthalate (DAP)		————

广东星坤科技股份有限公司
文件工程章

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

XKB INDUSTRIAL PRECISION CO.,LIMITED

DSND		SCALE: N/A	MODEL TYPE: SLIDE SWITCH
DWN		VIEW:	PART NO.: SS-12D11XXX
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	

WEIGHT	SHEET	REVISIC
	1/1	A0