
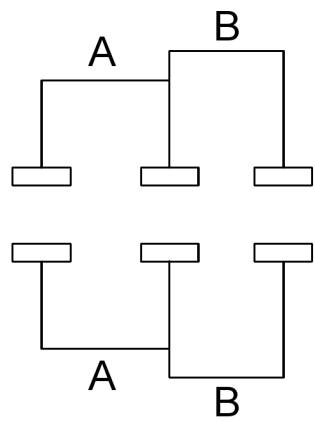


NOTE:
 Rating: DC 12V 50mA
 Operating Force: 200±100gf
 Lifetime: 10,000 Cycles

PAPT NO	L
SS-3260D-L1	2.0
SS-3260D-L2	3.0
SS-3260D-L3	4.0

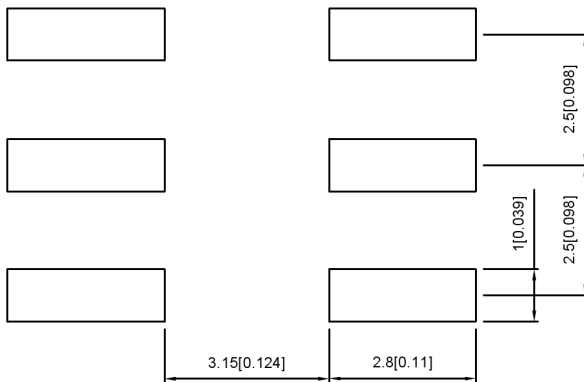

ITEM	PAPT NAME	TER,NO	QTY	MATERIAL	FINISHING	REMAR
5	Terminal	6	Brass (0.30t)	ag Plated		
4	Contact spring	1	Phosphor branze	ag Plated		
3	Base	1	Lcp	Black		
2	Cover	1	Sus	Natural		
1	Keystake	1	Pa46	Black		

广东星坤科技股份有限公司

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

文件工程章

REVISIONS	UNSPECIFIED TOLERANCES
ANGLAR ±5°	
L ≤ 4 ±0.2	
4 < L ≤ 16 ±0.3	
16 < L ≤ 63 ±0.4	
L > 63 ±0.5	



DSND	SCALE: N/A
DWN	VIEW:
CHKD	UNIT: mm/in
APPD	SIZE: A4

MODEL TYPE: SLIDE SWITCH		
PART NO.: SS-3260D-X		
DWG NO.:		
WEIGHT	SHEET	REVISI
	1/1	A0

XKB INDUSTRIAL PRECISION CO., LIMITED