

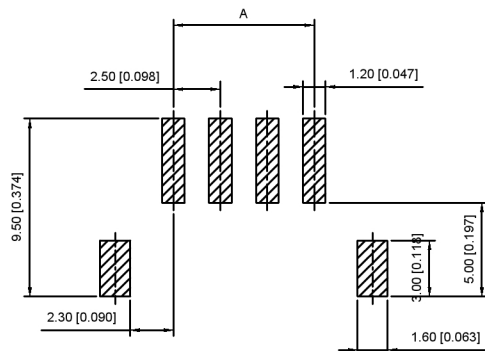



2P Shape
SCALE 1:1



Recommended P.C.B Layout
General Tolerance±0.05

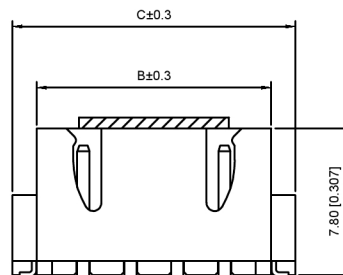

3P~16P Shape
SCALE 1:1

Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -40°C~+85°C
- Insulation resistance: ≥1000M Ω
- Contact resistance: ≤10mΩ
- After environmental testing : ≤20mΩ

X8821 W V S-XX - 9T SN
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Category : W-WAFER
- ③ Wedding Board Angle : V-Stright 180°
- ④ Welding Way:S-SMT
- ⑤ Row No.-Pin No.: XX-02P~20P
- ⑥ Material : 9T-PA9T 94V-0
- ⑦ Plating Category: Sn-Bright Tin Plating

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	2.50	7.45	10.00	12	27.50	32.45	35.00
03	5.00	9.95	12.50	13	30.00	34.95	37.50
04	7.50	12.45	15.00	14	32.50	37.45	40.00
05	10.00	14.45	17.50	15	35.00	39.95	42.50
06	12.50	17.45	20.00	16	37.50	42.45	45.00
07	15.00	19.95	22.50				
08	17.50	22.45	25.00				
09	20.00	24.95	27.50				
10	22.50	27.45	30.00				
11	25.00	29.95	32.50				

X8821WVS-XX-9TSN	PA9T UL 94V-0	Brass	Tin-Plated	X8821H
PART NO	Material	Material(pin)	Finish(pin)	Suitable XKB Terminal

广东星坤科技股份有限公司

ΔX		日期
ΔX		日期
ΔX		日期
MARK		

文件工程章

REVISIONS	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
					ANGULAR ±5°
					L≤4 ±0.2
					4<L≤16 ±0.3
					16<L≤63 ±0.4
					L>63 ±0.5

DSND		DATE		SCALE: N/A	MODEL TYPE: 2.5mm Crimp Style Connectors		
DWN		DATE		VIEW: 		PART NO.: X8821WVS-XX-9TSN	
CHKD		DATE		UNIT: mm/in	DWG NO.: X-X8821WVS-XX-9TSN		
APPD		DATE		SIZE: A4			
XKB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT	SHEET	REVISION
						1/1	A0