

# 2.5" SATA SSD



Product Name: US25S3TND

Capacity : 4TB

Revision History

<b>Revision</b>	<b>Date</b>	<b>Description</b>	<b>Editor</b>
<b>0</b>	Mar. 02, 2022	Initial Release	

# Table of Contents

1.0 General Description .....	5
2.0 Mechanical Specification.....	6
2.1 Physical dimensions and Weight .....	6
2.2 Product Dimensions .....	6
3.0 Product Specification .....	7
3.1 Interface and configuration.....	7
3.2 Capacity.....	7
3.3 Performance.....	7
3.3.1 Read/Write & ATTO Performance .....	7
3.3.2 Read/Write & CDM Performance .....	7
3.3.3 IOPS Performance.....	8
3.3.4 Read/Write & AS-SSD Performance.....	8
3.4 Electrical.....	8
3.4.1 Operating Voltage .....	8
3.5 Environmental Conditions.....	9
3.6 Reliability .....	9
3.6.1 Reliability .....	9
3.7 Endurance.....	9
4.0 Supported Command Sets .....	10
4.1 Identify Device .....	10
4.2 S.M.A.R.T. Attribute .....	21
5.0 Pin assignment and descriptions.....	23
6.0 Product Line up.....	24
7.0 Package Specifications .....	24

## Key Features

- **Capacity:**
  - 4TB
- **NAND Flash:** TLC 96L
- **Form Factor:** 2.5 inch SATA
- **DRAM Buffer:** DDR4
- **Compatibility:**
  - Serial ATA 6Gb/s interface
  - Complies with ATA-8 Standard
  - Complies SATA Revision 3.1
  - S.M.A.R.T feature supported
  - NCQ Command set supported
- **Performance:**
  - Sequential Read:  
Up to 550MB/s
  - Sequential Write:  
Up to 520MB/s
  - Random 4K Read:  
Up to 90K
  - Random 4K Write:  
Up to 80K
- **Power Consumption (Max.):**
  - Idle: 1.3W
  - SR/SW : 1.2W / 1.2W
  - RR/RW: 1.4W / 1.2W
- **Temperature:**
  - Commercial : 0°C - 70°C
  - Non-operation: -55°C ~ 95°C
- **Humidity**
  - 0°C to 55°C / 5%~95% RH,  
non-condensing
- **Shock**
  - 1500G/0.5ms
- **Vibration**
  - 20G Peak, 80~2000Hz
- **Reliability**
  - MTBF: 2,000,000 hours

## 1.0 General Description

Taking the advantages of NAND flash memory, Solid State Drive (SSD) provides better solutions on durability, performance, and power efficiency over traditional hard disk drives. Employing static wear-leveling technology to maximize device mean time between failures (MTBF), The SSD solutions are your best choice on wide-ranged mobile computing devices and consumer electronic products. With standard SATA form factor or customized module form factor, the 2.5-inch YTY UNiCORE SSD US25S3TNN capacity 4TB using 3D TLC type flash memories.

## 2.0 Mechanical Specification

All product specifications not covered in this document (electrical performance, appearance, etc.) are in accordance with YTY UNiCORE's defined norms and standards.


### 2.1 Physical dimensions and Weight

Table 2-1 Dimensions and Weight

Model	Length (mm)	Width (mm)	Height (mm)	Weight (gram)
US25S3TND- 004TNSN	100+/-0.45	70 +/- 0.1	7.0 +/- 0.2	75g +/- 5

### 2.2 Product Dimensions

Figure 2-1 Product Dimensions

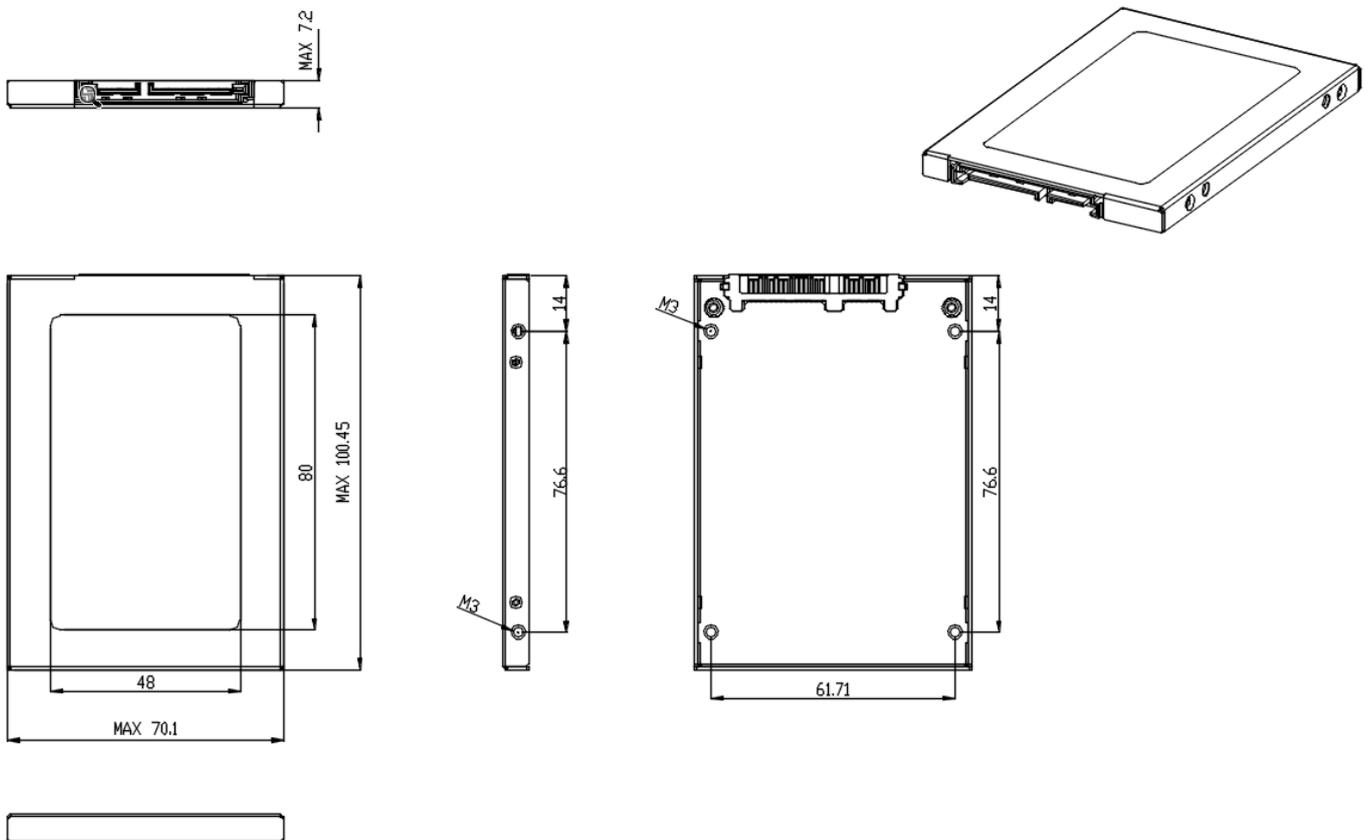

## 3.0 Product Specification

### 3.1 Interface and configuration

- Compliant with Serial ATA International Organization: Serial ATA Revision 3.1
- Compliant SSD Allion compliance program.
- Support ATA-8 Command Set
- Support 1-port 1.5/3.0/6.0 Gbps SATA I/II/III interface.

### 3.2 Capacity

**Table 3-1 User Addressable Sectors**

Model	US25S3TND
Unformatted Capacity	3840B
Total User Addressable Sectors (LBA Mode)	7,501,476,528

Total useable capacity may be less (due to formatting, flash management, and other functions).  
1GB=1,000,000,000 bytes; 1sector = 512bytes.

### 3.3 Performance

#### 3.3.1 Read/Write & ATTO Performance

**Table 3-2 Read/Write Performance (ATTO)**

	4TB	Unit
Sequential Read	540	MB/s
Sequential Write	510	MB/s

-Seq. Read & Write speed test by ATTO  
-The system conditions and test environment may affect test result

#### 3.3.2 Read/Write & CDM Performance

**Table 3-3 Read/Write Performance (CDM)**

	4TB	Unit
Sequential Q32 Read	560	MB/s
Sequential Q32 Write	520	MB/s

-Seq. Read & Write speed test by Crystal Disk Mark 5.1.2

### 3.3.3 IOPS Performance

**Table 3-4 Read/Write & IOPS Performance**

	<b>4TB</b>	<b>Unit</b>
<b>4K Random Read</b>	90K	IOPS
<b>4K Random Write</b>	80K	IOPS

- Seq. Read & Write speed test by IOmeter 2010 with "00" pattern (Queue depth of 32; Measurements are performed on 10% capacity of LBA range. Write cache enable)
- IOPS Test Utility: IOmeter 2010 (Queue depth of 32; Measurements are performed on 10% capacity of LBA range. Write cache enable)
- The system conditions and test environment may affect test result

### 3.3.4 Read/Write & AS-SSD Performance

**Table 3-5 Read/Write Performance (AS-SSD)**

	<b>4TB</b>	<b>Unit</b>
<b>Sequential Read</b>	520	MB/s
<b>Sequential Write</b>	470	MB/s
<b>4K-64 Thrd Read</b>	370	MB/s
<b>4K-64 Thrd Write</b>	300	MB/s

- Seq. Read & Write speed test by AS-SSD with Random pattern

## 3.4 Electrical

### 3.4.1 Operating Voltage

**Table 3-6 Operating Voltage**

<b>Operating Voltage</b>	
<b>Input Power</b>	DC 5.0V ± 5%
<b>Maximum Ripple</b>	100mV p-p or less

### 3.4.2 Power Consumption (Typical)

**Table 3-7 Power Consumption (Typical)**

	4TB	Unit
Idle	1.3	W
Sequential Read	2.3	W
Sequential Write	2.8	W
Random Read	2.0	W
Random Write	2.2	W

### 3.5 Environmental Conditions

**Table 3-8 Temperature, Humidity, Shock, Vibration**

Feature	Operating	Non-Operating
Normal Temperature	0°C to 70°C	-55°C to 95°C
Humidity	0°C to 55°C / 5%~95% RH, non-condensing	
Vibration	20G Peak, 10~2000Hz	
Shock	1500G, duration 0.5ms, Half Sine Wave	

### 3.6 Reliability

#### 3.6.1 Reliability

**Table 3-9 Reliability Specification**

Parameter	Simulate Value
<b>Mean Time Between Failures (MTBF)</b> The MTBF statistics were calculated by Part Count Method, not relevant to individual units	2,000,000 hours

### 3.7 Endurance

Endurance for the SSD can be predicted based on the operating workload .The tables as below shows the drive lifetime for each SSD capacity based JESD219 client workload.

**Table 3-10 Tera Byte Written**

Total Byte Written (TBW)	4TB	Unit
	5000	TB

## 4.0 Supported Command Sets

### 4.1 Identify Device

IDENTIFY DEVICE (ECh). This commands read out 512Bytes of drive parameter information. Parameter Information consists of the arrangement and value as shown in the following table. This command enables the host to receive the Identify Drive Information from the device.

**Table 4-1 Identify Device Table**

Word	Value	F/V/X	Description
0	0040h	F	General configuration bit-significant information:
	0		15 0 = ATA device
	0		14-8 Retired
	1		7:6 Obsolete
	0		5-3 Retired
	0		2 Response incomplete
	0		1 Retired
	0		0 Reserved
1	3FFFh	X	Obsolete
2	C837h	V	Specific configuration
3	0010h	X	Obsolete
4-5	XXXXh	X	Retired
6	003Fh	X	Obsolete
7-8	XXXXh	V	Reserved for the Compact Flash Association
9	0000h	X	Retired
10-19	XXXXh	F	Serial number
20-21	XXXXh	X	Retired
22	0000h	X	Obsolete
23-26	XXXXh	F	Firmware revision (8 ASCII characters)
27-46	XXXXh	F	Model number (40 ASCII characters)
47	8001h	F	Capabilities
	80		15-8 80h
	01		07-00 00h = Reserved
			01h-FFh = Maximum number of logical sectors that shall be transferred per DRQ data block on READ/WRITE MULTIPLE commands
48	4001h	F	Trusted Computing feature set options
	0		15 Shall be cleared to zero
	1		14 Shall be set to one
	0000		13:1 Reserved for the Trusted Computing Group
	1		0 1=Trusted Computing feature set is supported
49	2F00h	F	Capabilities
	0		15:14 Reserved for the IDENTIFY PACKET DEVICE command

	1		13 1 = Standby timer values as specified in this standard are supported
			0 = Standby timer values shall be managed by the device
	0		12 Reserved for the IDENTIFY PACKET DEVICE command
	1		11 1 = IORDY supported
			0 = IORDY may be supported
	1		10 1 = IORDY may be disabled
	1		9 1 = LBA is supported
	1		8 1 = DMA supported
	00		7:2 Reserved
	0		1:0 Current Long Physical Sector Alignment setting
50	4000h	F	Capabilities
	0	F	15 Shall be cleared to zero
	1	F	14 Shall be set to one
	000	X	13:02 Reserved
	0	X	1 Obsolete
	0	F	0 Vendor specific Standby timer value minimum
51-52	XXXXh	X	Obsolete
53	0006h		Field Validity
	00	F	15:8 Free-fall Control Sensitivity
			00h = Vendor's recommended setting
			01h-FFh = Sensitivity level
	00	X	7:3 Reserved
	1	F	2 1 = Word 88 are valid
	1	F	1 1 = Word 70:64 are valid
	0	F	0 Obsolete
54-58	XXXXh	X	Obsolete
59	9D01h		Capabilities
	1	F	15 1 = BLOCK ERASE EXT command is supported
	0	F	14 1 = OVERWRITE EXT command is supported
	0	F	13 1 = CRYPTO SCRAMBLE EXT command is supported
	1	F	12 1 = Sanitize feature set is supported
	6	F	11:9 Reserved
	1	V	8 1 = Multiple logical sector setting is valid
	01	V	7:0 Current setting for number of logical sectors
60-61	XXXXh	F	Total number of user addressable logical sectors
62	0000h	X	Obsolete
63	0007h		Multiword DMA transfer
	00	F	15:11 Reserved
	0	V	10 1 = Multiword DMA mode 2 is selected
	0	V	9 1 = Multiword DMA mode 1 is selected

	0	V	8	1 = Multiword DMA mode 0 is selected
	00	X	7:3	Reserved
	1	F	2	1 = Multiword DMA mode 2 and below are supported
	1	F	1	1 = Multiword DMA mode 1 and below are supported
	1	F	0	1 = Multiword DMA mode 0 is supported
64	0003h			PIO transfer mode
	0000	F	15:2	Reserved
	3	F	1:0	PIO modes supported
65	0078h			Minimum Multiword DMA transfer cycle time per word
		F	15:0	Cycle time in nanoseconds
66	0078h			Manufacturer's recommended Multiword DMA transfer cycle time
		F	15:0	Cycle time in nanoseconds
67	0078h			Minimum PIO transfer cycle time without flow control
		F	15:0	Cycle time in nanoseconds
68	0078h			Minimum PIO transfer cycle time with IORDY flow control
		F	15:0	Cycle time in nanoseconds
69	4DB8h	X		Additional Supported
	0		15	1 = CFAST Specification Support
	1		14	1 = Deterministic data in trimmed LBA range(s) is supported
	0		13	1 = Long Physical Sector Alignment Error Reporting Control is supported
	0		12	Obsolete
	1		11	1 = READ BUFFER DMA is supported
	1		10	1 = WRITE BUFFER DMA is supported
	0		9	1 = SET MAX SET PASSWORD DMA and SET MAX UNLOCK DMA are supported
	1		8	1 = DOWNLOAD MICROCODE DMA is supported
	1		7	Reserved for IEEE 1667
	0		6	0 = Optional ATA device 28-bit commands supported
	1		5	1 = Trimmed LBA range(s) returning zeroed data is supported
	1		4	1 = Device Encrypts All User Data
	1		3	1 = Extended Number of User Addressable Sectors is supported
	0		2	1 = All write cache is non-volatile
	0		1:0	Reserved
70	0000h	F		Reserved
71-74	XXXXh	F		Reserved for the IDENTIFY PACKET DEVICE command
75	001Fh			Queue depth
	000	F	15:5	Reserved
	1F	F	4:0	Maximum queue depth - 1
76	850Eh	X		Serial ATA Capabilities
	1		15	1 = Supports READ LOG DMA EXT as equivalent to READ LOG EXT

	0		14 1 = Supports Device Automatic Partial to Slumber transitions
	0		13 1 = Supports Host Automatic Partial to Slumber transitions
	0		12 1 = Supports NCQ priority information
	0		11 1 = Supports Unload while NCQ commands are outstanding
	1		10 1 = Supports the SATA Phy Event Counters log
	0		9 1 = Supports receipt of host initiated power management requests(HIPM)
	1		8 1 = Supports the NCQ feature set
	0		7:4 Reserved for Serial ATA
	1		3 1 = Supports SATA Gen3 Signaling Speed (6.0Gb/s)
	1		2 1 = Supports SATA Gen2 Signaling Speed (3.0Gb/s)
	1		1 1 = Supports SATA Gen1 Signaling Speed (1.5Gb/s)
	0		0 Shall be cleared to zero
77	0006h	X	Serial ATA Additional Capabilities
	000		15:7 Reserved for Serial ATA
	0		6 1 = Supports RECEIVE FPDMA QUEUED and SEND FPDMA QUEUED commands
	0		5 1 = Supports NCQ Queue Management Command
	0		4 1 = Supports NCQ Streaming
	3		3:1 Serial ATA signal speed (01:Gen1, 02:Gen2, 03:Gen3)
	0		0 Shall be cleared to zero
78	0044h	X	Serial ATA features supported
	0	X	15:9 Reserved for Serial ATA
	0	X	8 1 = Device Sleep supported
	0	X	7 1 = Device supports NCQ Autosense
	1	X	6 1 = Device supports Software Settings Preservation
	0	X	5 Reserved for Serial ATA
	0	X	4 1 = Device supports in-order data delivery
	0	X	3 1 = Device supports initiating power management(DIPM)
	1	X	2 1 = Device supports DMA Setup auto-activation
	0	X	1 1 = Device supports non-zero buffer offsets
	0	F	0 Shall be cleared to zero
79	0044h		Serial ATA features enabled
	00		15:9 Reserved for Serial ATA
	0		8 1 = Device Sleep enabled
	0		7 1 = Automatic Partial to Slumber transitions enabled
	1		6 1 = Software Settings Preservation enabled
	0		5 Reserved for Serial ATA
	0		4 1 = In-order data delivery enabled
	0		3 1 = Device initiated power management enabled(DIPM)
	1		2 1 = DMA Setup auto-activation enabled

	0		1 1 = Non-zero buffer offsets enabled
	0		0 Shall be cleared to zero
80	07FCh	X	Major version number 0000h or FFFFh = device does not report version
	00		15:11 Reserved
	1		10 1 = supports ACS-3
	1		9 1 = supports ACS-2
	1		8 1 = supports ATA8-ACS
	1		7 1 = supports ATA/ATAPI-7
	1		6 1 = supports ATA/ATAPI-6
	1		5 1 = supports ATA/ATAPI-5
	E		4:1 Obsolete
	0		0 Reserved
81	006Dh	V	Minor version number
82	746Bh	X	Commands and feature sets supported
	0		15 Obsolete
	1		14 1 = NOP command is supported
	1		13 1 = READ BUFFER command is supported
	1		12 1 = WRITE BUFFER command is supported
	1		11:10 Obsolete
	0		9 1 = DEVICE RESET command is supported
	0		8:7 Obsolete
	1		6 1 = Read look-ahead is supported
	1		5 1 = Volatile write cache is supported
	0		4 1 = PACKET feature set is supported
	1		3 1 = Power Management feature set is supported
	0		2 Obsolete
	1		1 1 = Security feature set is supported
	1		0 1 = SMART feature set is supported
83	7401h	X	Commands and feature sets supported
	0		15 Shall be cleared to zero
	1		14 Shall be set to one
	1		13 1 = FLUSH CACHE EXT command is supported
	1		12 1 = Mandatory FLUSH CACHE command is supported
	0		11 Obsolete
	1		10 1 = 48-bit Address feature set is supported
	0		9:8 Obsolete
	0		7 Reserved for the Address Offset Reserved Area Boot Method
	0		6 1 = SET FEATURES subcommand is required to spin-up after power-up
	0		5 1 = PUIS feature set is supported

	0		4 Obsolete
	0		3 1 = APM feature set is supported
	0		2 1 = CFA feature set is supported
	0		1 Obsolete
	1		0 1 = DOWNLOAD MICROCODE command is supported
84	6162h	X	Commands and feature sets supported
	0		15 Shall be cleared to zero
	1		14 Shall be set to one
	1		13 IDLE IMMEDIATE command with UNLOAD feature is supported
	0		12 Reserved for TLC
	0		11 Reserved for TLC
	0		10:9 Obsolete
	1		8 1 = 64-bit world wide name is supported
	0		7 Obsolete
	1		6 1 = WRITE DMA FUA EXT and WRITE MULTIPLE FUA EXT commands are supported
	1		5 1 = GPL feature set is supported
	0		4 1 = Streaming feature set is supported
	0		3 Obsolete
	0		2 1 = Media serial number is supported
	1		1 1 = SMART self-test is supported
	0		0 1 = SMART error logging is supported
85	7469h	X	Commands and feature sets supported or enabled
	0		15 Obsolete
	1		14 1 = NOP command is supported
	1		13 1 = READ BUFFER command is supported
	1		12 1 = WRITE BUFFER command is supported
	1		11:10 Obsolete
	0		9 1 = DEVICE RESET command is supported
	0		8 1 = SERVICE interrupt is enabled
	0		7 1 = Release interrupt is enabled
	1		6 1 = Read look-ahead is enabled
	1		5 1 = Volatile write cache is enabled
	0		4 1 = PACKET feature set is supported
	1		3 1 = Mandatory Power Management feature set is supported
	0		2 Obsolete
	0		1 1 = Security feature set is enabled
	1		0 1 = SMART feature set is enabled
86	B401h	X	Commands and feature sets supported or enabled
	1		15 1 = Words 119-120 are valid
	0		14 Reserved

			13 1 = FLUSH CACHE EXT command supported
			12 1 = FLUSH CACHE command supported
			11 Obsolete
			10 1 = 48-bit Address features set is supported
			9:8 Obsolete
			7 1 = Reserved for Address Offset Reserved Area Boot Method
			6 1 = SET FEATURES subcommand is required to spin-up after power-up
			5 1 = PUIS feature set is enabled
			4 Obsolete
			3 1 = APM feature set is enabled
			2 1 = CFA feature set is supported
			1 Obsolete
			0 1 = DOWNLOAD MICROCODE command is supported
87	6162h	X	Commands and feature sets supported or enabled
			15 Shall be cleared to zero
			14 Shall be set to one
			13 1 = IDLE IMMEDIATE command with UNLOAD FEATURE is supported
			12 Reserved for TLC
			11 Reserved for TLC
			10:9 Obsolete
			8 1 = 64-bit world wide name is supported
			7 Obsolete
			6 1 = WRITE DMA FUA EXT and WRITE MULTIPLE FUA EXT commands are supported
			5 1 = GPL feature set is supported
			4:3 Obsolete
			2 1 = Media serial number is valid
			1 1 = SMART self-test supported
			0 1 = SMART error logging is supported
88	203Fh	X	Ultra DMA modes
			15 Reserved
			14 1 = Ultra DMA mode 6 is selected
			13 1 = Ultra DMA mode 5 is selected
			12 1 = Ultra DMA mode 4 is selected
			11 1 = Ultra DMA mode 3 is selected
			10 1 = Ultra DMA mode 2 is selected
			9 1 = Ultra DMA mode 1 is selected
			8 1 = Ultra DMA mode 0 is selected
			7 Reserved
			6 1 = Ultra DMA mode 6 and below are supported

	1	F	5	1 = Ultra DMA mode 5 and below are supported
	1	F	4	1 = Ultra DMA mode 4 and below are supported
	1	F	3	1 = Ultra DMA mode 3 and below are supported
	1	F	2	1 = Ultra DMA mode 2 and below are supported
	1	F	1	1 = Ultra DMA mode 1 and below are supported
	1	F	0	1 = Ultra DMA mode 0 is supported
89	0001h	F		Time required for security erase unit completion
	0		15	1 = Extended Time is reported in bits 14:0
				0 = Extended Time is reported in bits 7:0
	00		14:8	Extended Time required for Normal Erase mode
	01		7:0	Extended Time required for Normal Erase mode
90	0001h	F		Time required for Enhanced security erase completion
	0		15	1 = Extended Time is reported in bits 14:0
				0 = Extended Time is reported in bits 7:0
	00		14:8	Extended Time required for Enhanced Erase mode
	01		7:0	Extended Time required for Enhanced Erase mode
91	0000h	V		Advanced Power Management Level
	00		15:8	Reserved
	00		7:0	Current APM level value
92	FFFEh	V		Master Password Identifier
93	0000h	X		Hardware reset result
	0		15	Shall be cleared to zero
	0		14	Shall be set to one
	0		13	1 = device detected the CBLID- above
				0 = device detected the CBLID- below
	00		12:8	Device 1 hardware reset result
	00		7:0	Device 0 hardware reset result
94	0000h	V		Obsolete
95	0000h	V		Stream Minimum Request Size
96	0000h	V		Streaming Transfer Time - DMA
97	0000h	V		Streaming Access Latency - DMA and PIO
98-99	XXXXh	V		Streaming Performance Granularity
100-103	XXXXh	V		Number of User Addressable Logical Sectors
104	0000h	V		Streaming Transfer Time - PIO
105	0008h	V		Maximum number of 512-byte blocks per DATA SET MANAGEMENT command
106	6003h			Physical sector size / logical sector size
	0		15	Shall be cleared to zero
	1		14	Shall be set to one
	1		13	1 = Device has multiple logical sectors per physical sector
	0		12	1 = Device Logical Sector longer than 256 Words
	00		11:4	Reserved

	3		3:0 2^logical sectors per physical sector
107	0000h		Inter-seek delay for ISO 7779 standard acoustic testing
108-111	XXXXh	V	World wide name
112-115	XXXXh	X	Reserved
116	0000h	X	Reserved for TLC
117-118	XXXXh	X	Logical sector size
119	401C		Commands and feature sets supported
	0		15 Shall be cleared to zero
	1		14 Shall be set to one
	00		13:8 Reserved
	0		7 1 = Extended Power Conditions feature set is supported
	0		6 1 = Sense Data Reporting feature set is supported
	0		5 1 = Free-fall Control feature set is supported
	1		4 1 = Download Microcode mode 3 is supported
	1		3 1 = READ LOG DMA EXT and WRITE LOG DMA EXT commands are supported
	1		2 1 = WRITE UNCORRECTABLE EXT command is supported
	0		1 1 = Write-Read-Verify feature set is supported
	0		0 Reserved for DDT
120	401C		Commands and feature sets supported or enabled
	0		15 Shall be cleared to zero
	1		14 Shall be set to one
	00		13:8 Reserved
	0		7 1 = Extended Power Conditions feature set is enabled
	0		6 1 = Sense Data Reporting feature set is enabled
	0		5 1 = Free-fall Control feature set is enabled
	1		4 1 = Download Microcode mode 3 is supported
	1		3 1 = READ LOG DMA EXT and WRITE LOG DMA EXT commands are supported
	1		2 1 = WRITE UNCORRECTABLE EXT command is supported
	0		1 1 = Write-Read-Verify feature set is enabled
	0		0 Reserved for DDT
121-126	XXXXh	X	Reserved for expanded supported and enabled settings
127	0000h	F	Obsolete
128	0029h	V	Security status
	00		15-9 Reserved
	0		8 Master Password Capability: 0 = High, 1 = Maximum
	0		7-6 Reserved
	1		5 1 = Enhanced security erase supported
	0		4 1 = Security count expired
	1		3 1 = Security frozen

	0		2 1 = Security locked
	0		1 1 = Security enabled
	1		0 1 = Security supported
129-159	XXXXh	X	Vendor specific
160	0000h	X	CFA power mode
	0		15 Word 160 supported
	0		14 Reserved
	0		13 CFA power mode 1 is required for one or more commands implemented by the device
	0		12 CFA power mode 1 disabled
	000		11:0 Maximum current in mA
161-167	XXXXh	X	Reserved for the CompactFlash Association
168	0003h		Device Nominal Form Factor
	000		15:4 Reserved
	3		3:0 Device Nominal Form Factor
169	0001		DATA SET MANAGEMENT command is supported
	0000		15:1 Reserved
	1		0 1 = Trim bit in the DATA SET MANAGEMENT command is supported
170-173	XXXXh	X	Additional Product Identifier
174-175	XXXXh	X	Reserved
176-205	XXXXh	V	Current media serial number
206	0000h	X	SCT Command Transport
	0		15:12 Vendor Specific
	0		11:8 Reserved
	0		7 Reserved for Serial ATA
	0		6 Reserved
	0		5 1 = SCT Data Tables command is supported
	0		4 1 = SCT Feature Control command is supported
	0		3 1 = SCT Error Recovery Control command is supported
	0		2 1 = SCT Write Same command is supported
	0		1 Obsolete
	0		0 1 = SCT Command Transport is supported
207-208	XXXXh	X	Reserved
209	4000h		Alignment of logical blocks within a physical block
	0		15 Shall be cleared to zero
	1		14 Shall be set to one
	0000		13:0 Logical sector offset within the first physical sector where the first logical sector is placed
210-211	XXXXh	V	Write-Read-Verify Sector Count Mode 3
212-213	XXXXh	V	Write-Read-Verify Sector Count Mode 2

214-216	XXXXh	X	Obsolete
217	0001h	V	Nominal media rotation rate
220	0000h	V	Write-Read-Verify feature
	00		15:8 Reserved
	00		7:0 Write-Read-Verify feature set current mode
221	0000h	X	Reserved
222	10FFh	X	Transport major version number
	1		15:12 Transport Type ( 0:Parallel, 1:Serial, 2-F:Reserved )
	03		11:6 Parallel = Reserved / Serial = Reserved
	1		5 Parallel = Reserved / Serial = SATA Rev 3.0
	1		4 Parallel = Reserved / Serial = SATA Rev 2.6
	1		3 Parallel = Reserved / Serial = SATA Rev 2.5
	1		2 Parallel = Reserved / Serial = SATA II Extensions
	1		1 Parallel = ATA/ATAPI-7 / Serial = SATA 1.0a
	1		0 Parallel = ATA8-APT / Serial = ATA8-AST
223	0000h	X	Transport minor version number
224-229	XXXXh	X	Reserved
230-233	XXXXh	X	Extended Number of User Addressable Sectors
234	0001h	X	Minimum number of 512-byte data blocks per Download Microcode mode 03h operation
235	0100h	X	Maximum number of 512-byte data blocks per Download Microcode mode 03h operation
236-254	XXXXh	X	Reserved
255	XXXXh	X	Integrity word
	XX		15-8 Checksum
	XX		7-0 Checksum Validity Indicator

**Notes:**

F/V = Fixed/variable content.

F = the content of the word is fixed and does not change. For removable media devices, these values may change when media is removed or changed.

V = the contents of the word is variable and may change depending on the state of the device or the commands executed by the device.

X = the content of the word may be fixed or variable.

## 4.2 S.M.A.R.T. Attribute

The following table defines the vendor specific data in byte 2 to 361 of the 512-byte SMART data.

**Table 4-2 S.M.A.R.T. Attribute**

ID (Dec)	ID (Hex)	Attribute Name
1	01h	Read Error Rate
5	05h	Reallocated Sectors Count
9	09h	Power-On Hours Count
12	0Ch	Power Cycle Count
160	A0h	Uncorrectable Sector Count On Line
161	A1h	Number of Valid Spare Block
162	A2h	Number Of Running Spare Block
163	A3h	Number of Initial Invalid Block
164	A4h	Total Erase Count
165	A5h	Maximum Erase Count
166	A6h	Minimum Erase Count
167	A7h	Average Erase Count
168	A8h	Device Status Warning
170	AAh	SATA Fatal Error Count
177	B1h	Wear Leveling Count
181	B5h	Program Fail Count
182	B6h	Erase Fail Count
192	C0h	Sudden Power-off Count
193	C1h	Off-line Refresh Block Count
194	C2h	Temperature
195	C3h	Hardware Enter Hard Decode Count
197	C5h	On-line Refresh Block Count
198	C6h	Uncorrectable Sector Count
199	C7h	UltraDMA CRC Error Count
200	C8h	System Block Status
201	C9h	Hardware Enter Soft Decode Count
202	CAh	Hardware Enter RAID Count
231	E7h	Remaining Life Percentage Based on P/E
232	E8h	Remaining Life Percentage Based on Spare Count
241	F1h	Total LBAs Written
242	F2h	Total LBAs Read
245	F5h	Total Flash Programmed Count
248	F8h	System Recovery Count

249	F9h	Garbage Clean Count
250	FAh	SATA Link Speed
252	FCh	DRAM Uncorrectable Count

## 5.0 Pin assignment and descriptions

Signals	S1	GND	System Ground
	S2	Rx+	Differential signals pair receive
	S3	Rx-	
	S4	GND	System Ground
	S5	Tx-	Differential signals pair transmit
	S6	Tx+	
	S7	GND	System Ground
Power	P1	V33	NC
	P2	V33	NC
	P3	DEVSLP	Device Sleep Signal Pin
	P4	GND	System Ground
	P5	GND	System Ground
	P6	GND	System Ground
	P7	V5/PC	+5V Power supply, 2 <sup>nd</sup> Pre-charge
	P8	V5	+5V Power supply
	P9	V5	+5V Power supply
	P10	GND	System Ground
	P11	DAS	Reserved
	P12	GND	System Ground
	P13	V12/PC	NC
	P14	V12	NC
	P15	V12	NC

## 6.0 Product Line up

Table 6-1 Product Line up

Part Number	Capacity	Type	P/E Cycle	Remark
US25S3TND-004TNSN	4TB	2.5 SATA	3K	Normal, 0°C-70°C

## 7.0 Package Specifications

