

RoHS

版本 REV A0	变更事项 CHANGE CONTENT	依据 THEREUNDER	变更日期 DATE
-----------------	------------------------	------------------	--------------

技术要求:  
Technical requirement  
一. 电气性能:  
electrical performance





- 1-1. 额定电流: 2A AC DC.  
rated current: 2A AC DC.
- 1-2. 接触电阻:  $\leq 20m\Omega$   
Contact resistance:  $\leq 20m\Omega$
- 1-3. 绝缘电阻:  $\geq 1000M\Omega$   
Insulation resistance:  $\geq 1000M\Omega$
- 1-4. 耐压: 550V AC/Minute  
withstand voltage: 550V AC/Minute

二. 物理特性:

- Physical characteristics
- 2-1. 环境温度:  $-25^{\circ}C \sim 105^{\circ}C$   
environmental temperature:  $-25^{\circ}C \sim 105^{\circ}C$
- 2-2. 焊接温度:  $+260^{\circ}C$ , 10s max  
welding temperature:  $+260^{\circ}C$ , 10s max

三. 材质:

- Material
- 3-1. 塑胶: PA6T(Black) UL94V-0  
plastic: PA6T(Black) UL94V-0
- 3-2. 插针: 黄铜/镀金  
pin: Brass/Gold plated

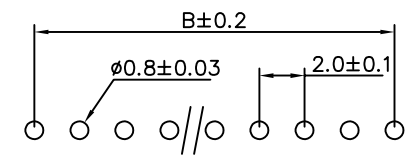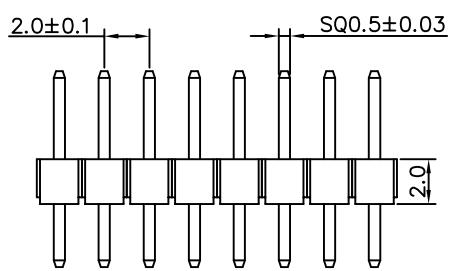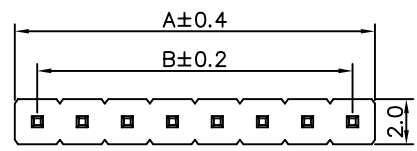

P.C.B LAYOUT

PIN	A	B
1x2A	4.00	2.00
1x3A	6.00	4.00
1x4A	8.00	6.00
1x5A	10.00	8.00
1x6A	12.00	10.00
1x7A	14.00	12.00
1x8A	16.00	14.00
1x9A	18.00	16.00
1x10A	20.00	18.00
1x11A	22.00	20.00
1x12A	24.00	22.00
1x13A	26.00	24.00
1x14A	28.00	26.00
1x15A	30.00	28.00
1x16A	32.00	30.00
1x17A	34.00	32.00
1x18A	36.00	34.00
1x19A	38.00	36.00
1x20A	40.00	38.00
1x21A	42.00	40.00
1x22A	44.00	42.00
1x23A	46.00	44.00
1x24A	48.00	46.00
1x25A	50.00	48.00
1x26A	52.00	50.00
1x27A	54.00	52.00
1x28A	56.00	54.00
1x29A	58.00	56.00
1x30A	60.00	58.00
1x31A	62.00	60.00
1x32A	64.00	62.00
1x33A	66.00	64.00
1x34A	68.00	66.00
1x35A	70.00	68.00
1x36A	72.00	70.00
1x37A	74.00	72.00
1x38A	76.00	74.00
1x39A	78.00	76.00
1x40A	80.00	78.00

3	包装	<input checked="" type="checkbox"/> 袋装 <input type="checkbox"/> 管装 <input type="checkbox"/> 卷装 <input type="checkbox"/> 盒装	/	PCS
2	塑胶	PH2.0*2.0 1*40P PA6T料	1	PCS
1	方针	0.5mm L=8.7 黄铜镀金G/F	/	PCS
ITEM	PART NAME	DESCRIPTION	QUAY	UNIT

		单位 UNIT mm	泰华电子有限公司 <b>TaiHua Electronics Co., Ltd</b>	
x. ±0.5	x.*±	比例 SCALE	版本: A0    产品名称: PH2.0mm 排针 G/F 180度 1*nP	
.x±0.30	.x*±	核准: APPROVED BY	版次: 1/1	产品料号 Product No
.xx±0.20	.xx*±	审核: CHECKED BY	日期:	客户料号 Client No
.xxx±0.006	.xxx*±	制图: 吕灿东 DRAWN BY		