

RoHS

版本 REV	变更内容 CHANGE CONTENT	依据 REFERENCE	变更日期 DATE
AO			

技术要求:

Technical requirement

一. 电气性能:

electrical performance

1-1. 额定电流: 1A AC DC.

rated current: 1A AC DC.

1-2. 接触电阻:  $\leq 20m\Omega$

Contact resistance:  $\leq 20m\Omega$

1-3. 绝缘电阻:  $\geq 1000M\Omega$

Insulation resistance:  $\geq 1000M\Omega$

1-4. 耐压: 550V AC/Minute

withstand voltage: 550V AC/Minute

二. 物理特性:

Physical characteristics

2-1. 环境温度:  $-25^{\circ}C \sim 105^{\circ}C$

environmental temperature:  $-25^{\circ}C \sim 105^{\circ}C$

2-2. 焊接温度:  $+260^{\circ}C$ , 10s max

welding temperature:  $+260^{\circ}C$ , 10s max

三. 材质:





Material

3-1. 塑胶: PA6T(Black) UL94V-0

plastic: PA6T(Black) UL94V-0

3-2. 插针: 黄铜/镀金

pin: Brass/Gold plated

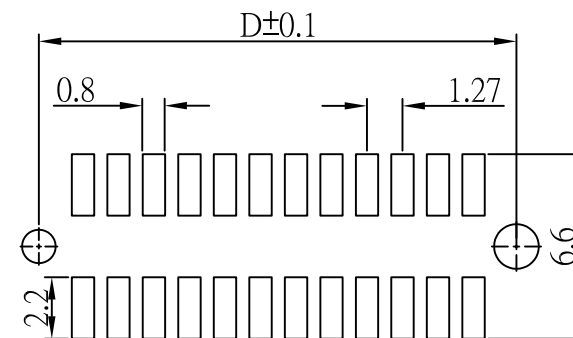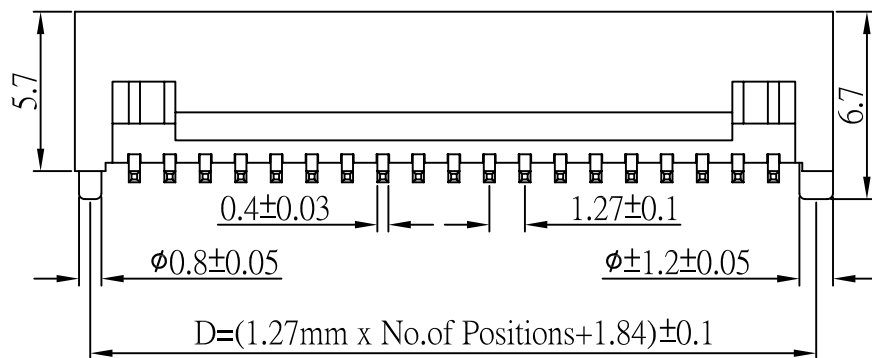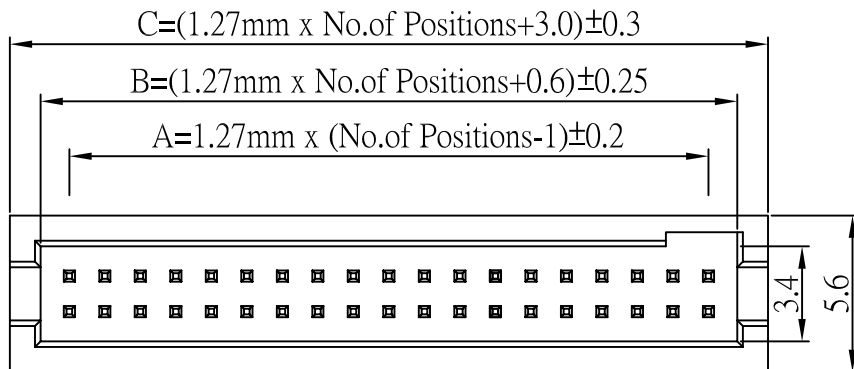

P.C.B LAYOUT

2	塑胶	1.27*5.7mm筒牛 2*nP PA6T料	1	PCS
1	方针	0.4mm L=6.6mm 黄铜镀金G/F	24	PCS
ITEM	PART NAME	DESCRIPTION	QUAY	UNIT

	单位 UNIT	mm	泰华电子有限公司	
	比例 SCALE		<b>Tai Hua-Tech Industrial Co.,Ltd.</b>	
x. ±0.5	x.*±	核准:	版本: AO	客户名称 Client name
.x±0.30	.x*±	APPROVED BY	页次: 1/1	产品名称 Product name
.xx±0.20	.xx*±	审核:	日期:	图纸编号 Drawing No
.xxx±0.005	.xxx*±	CHECKED BY		客户料号 Client No
		制图:		
		DRAWN BY		