

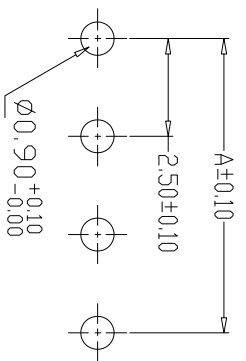
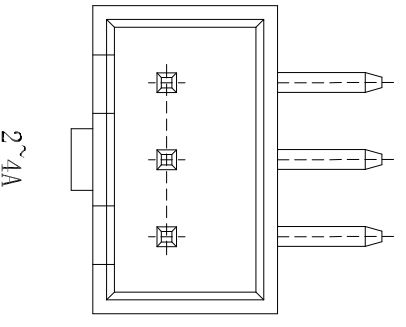


- SPECIFICATIONS**
- 1、Current Rating: 3A AC, DC
  - 2、Voltage Rating: 250V AC, DC
  - 3、Temperature Range: -25°C~+85°C
  - 4、Contact Resistance: 20mΩ Max
  - 5、Insulation Resistance: 1000MΩ Min
  - 6、Withstanding Voltage: 1000V AC/minute
  - 7、Material: Wafer Nylon66, UL94V-0  
PIN Brass Tin-plated

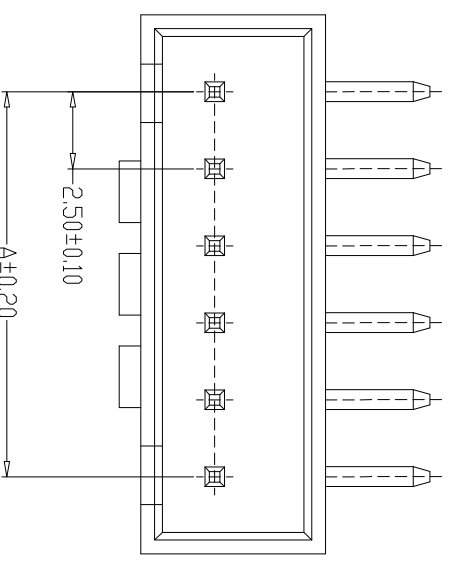

PCB LAYOUT

编 号	尺寸 (mm)	
	A	B
A2504-02AW	2.50	7.50
A2504-03AW	5.00	10.00
A2504-04AW	7.50	12.50
A2504-05AW	10.00	15.00
A2504-06AW	12.50	17.50
A2504-07AW	15.00	20.00
A2504-08AW	17.50	22.50
A2504-09AW	20.00	25.00
A2504-10AW	22.50	27.50
A2504-11AW	25.00	30.00
A2504-12AW	27.50	32.50
A2504-20AW	47.50	52.50

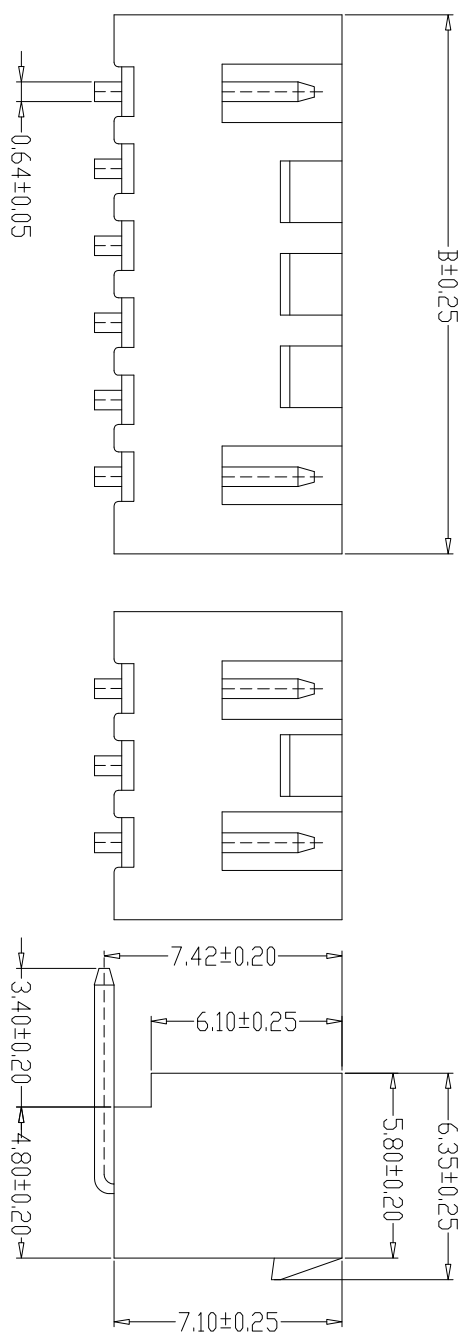

单位 mm	比例 1:1	审核: APPROVED BY	版本: 00	产品名称 Product Name	HA零件 WAFER DIP TYPE
SCALE		批准: CHECKED BY	页次: 1/1	产品编号 Product No.	TH-A2504-NAW
X: ±0.5 X: ±0.30	X: ± X: ±	制图: DRAWN BY	封文辉 2022.9.2	客户编号 Client No.	

深圳市泰华电子有限公司  
**TaiHua Electronics Co., Ltd**