

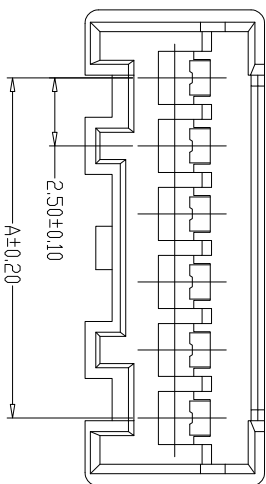
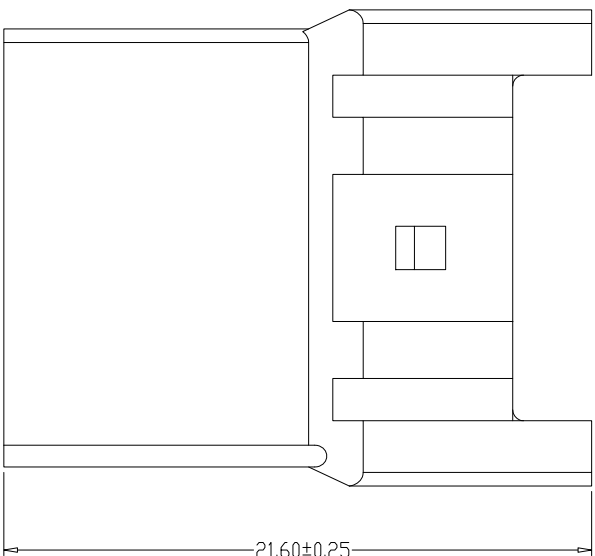
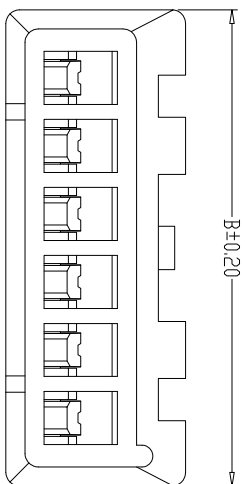


ROHS

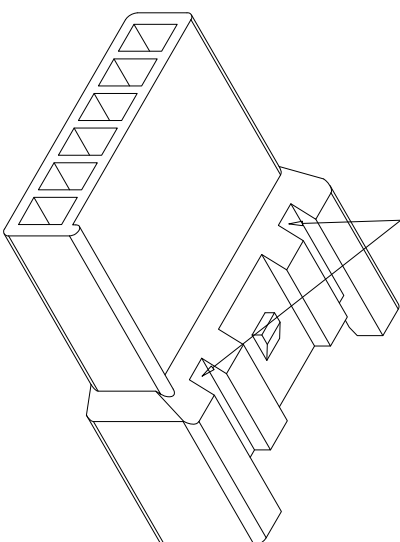


SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperature Range: -25°C~+85°C
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltage: 1000V AC/minute
- 7、Material:Housing:Nylon66, UL94V-0

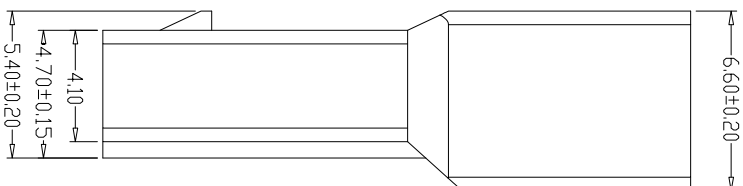

2~5孔无卡槽, 6孔以上有

编号	尺寸 (mm)	
	A	B
A2508-02R	2.50	7.50
A2508-03R	5.00	10.00
A2508-04R	7.50	12.50
A2508-05R	10.00	15.00
A2508-06R	12.50	17.50
A2508-07R	15.00	20.00
A2508-08R	17.50	22.50
A2508-09R	20.00	25.00
A2508-10R	22.50	27.50
A2508-11R	25.00	30.00
A2508-12R	27.50	32.50
A2508-13R	30.00	35.00
A2508-14R	32.50	37.50
A2508-15R	35.00	40.00



x. ±0.5 x*±

. x±0.30 . x*±

. xx±0.20 . xx*±

. xxx±0.003 . xxx*±

单位
UNIT

mm

比例
SCALE

批准:
APPROVED BY

审核:
CHECKED BY

制图:
DRAWN BY

版本:
VERSION

A0

页次:
PAGE

1/1

日期:
DATE

深圳市泰华电子有限公司
TaiHua Electronics Co., Ltd

产品名称
Product name

XA-NR

产品料号
Product No

TH-A2508-NR

客户料号
Client No

版本 REV	客户料号 CLIENT NO	生产日期 DATE
A0		