


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020/01/20	Vicky	Initial Released
B	C220473	2022/03/28	Vicky	$\triangle B$ X2

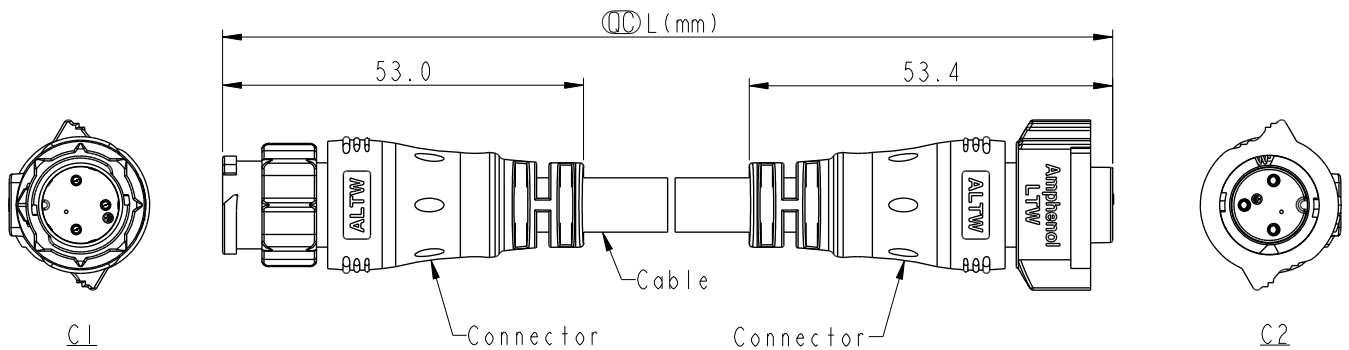

Pin Out	Wire	白	綠	黑
3	White			
2	Green			
1	Black			

Pin #	Wire
3	White
2	Green
1	Black

Pin #	Wire
1	Black
2	Green
3	White

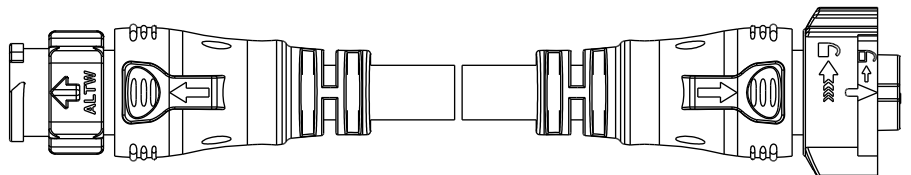

AB-BD $\triangle B$ XX ML-BDFL-QE XXX

$\triangle B$ XX: No. Of Pin

XXX: 0.5~99Meters
 A05: 0.5 Meter
 001: 01 Meter
 002: 02 Meters
 :
 099: 99 Meters

$\triangle B$
 Note:
 * RoHS Compliant
 * \circ Important dimension
 * C1
 Waterproof rate: IPX8, mated 1m/24h
 Housing: Thermoplastic, Black
 Pin: Copper alloy, Gold plated
 Outer Mold: Thermoplastic, Black
 * C2
 Waterproof rate: IPX8, mated 1m/24h
 Housing: Thermoplastic, Black
 Pin: Copper alloy, Gold plated
 O-Ring: Rubber, Dark gray
 Nut: Thermoplastic, Black
 Outer Mold: Thermoplastic, Black
 * Cable: SJTW, 18#*3C, PVC Jacket, Black, OD8.0mm
 * Cable length tolerance: 0.5M < L \leq 1M: +60/-0 mm
 1M < L \leq 3M: +120/-0 mm
 3M < L \leq 5M: +160/-0 mm
 5M < L \leq 10M: \pm 100 mm
 10M < L \leq 20M: \pm 200 mm
 20M < L \leq 30M: \pm 300 mm
 30M < L \leq 99M: \pm 500 mm

UNIT:mm TOLERANCE ± 0.5 mm	TITLE ACC, XLOK, B-5A, DB-ENDED MF		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO	DRAWN BY Vicky	DATE 2020-01-20
	SCALE 1:2	SIZE A4			SHEET 1	OF 1	DWG NO AB-BDXXML-BDFL-QEXXX
	REV. B	WC-REV. A.5	\circ : Inspection item		CUSTOMER ALTW	APPROVED BY Max	DATE 2020-01-20