



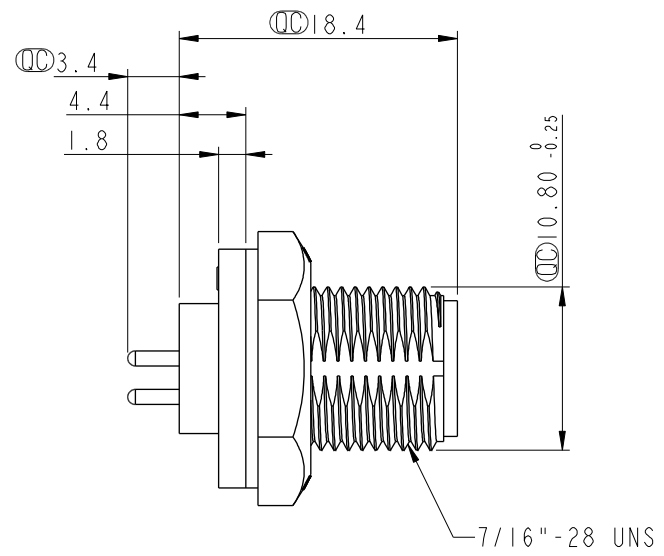


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8A0100	2008/09/15	Shin	Add Notes
C	LEN1640067	2016/03/30	Vicky	Update Logo
D	CI90268	2019/03/05	Ruru	Modify Note

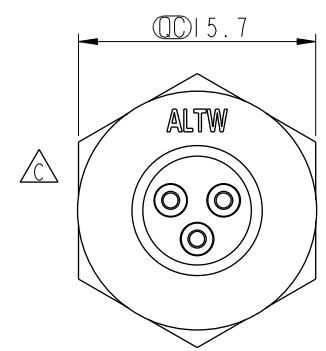

PCB Layout




Pin Assignments Front View

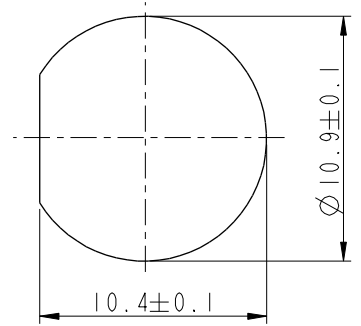

Recommended Panel Cut-Out

With Liquid Glue

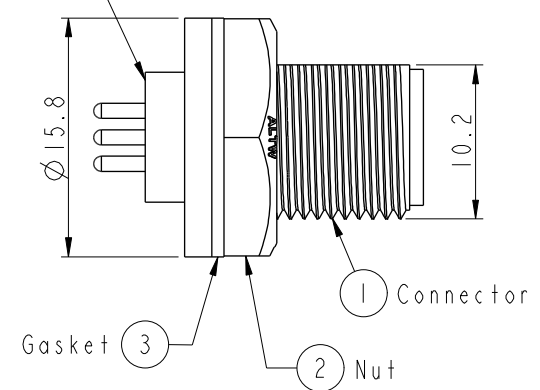

Note:

- * Important Dimension
- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Black

- * Use with waterproof cap or dust cap
Panel thickness max: 4.0mm
- * Use without waterproof cap or dust cap
Panel thickness max: 5.0mm
- * Gasket and Nut are packed separately in PE bags.

UNIT:mm		TITLE		Amphenol LTW		ITEM NO	DRAWN BY	DATE
		Mini Panel Screw 3Pin M Conn. M Pin		安費諾亮泰企業股份有限公司		AD-03PMMP-SC7001	Ruru	2019-03-05
TOLERANCE		SCALE	SIZE	SHEET	OF	DWG NO	CHECKED BY	DATE
.X ±0.25		2:1	A4	1	1	AD-03PMMP-SC7001	Rita	2019-03-05
.XX ±0.1		REV.	WC-REV.	QC: Inspection item		CUSTOMER	APPROVED BY	DATE
.XXX ±0.05		D	A.2			ALTW	Max	2019-03-05
ANGLES ±1°								