



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C201432	2020/09/10	Ouyang	 X1
C	C220608	2022/04/19	Ruru	 X4
D	C221195	2022/09/15	Allen Pan	 X1


AU-XXPMMP-QC8001
XX: No. Of Pin

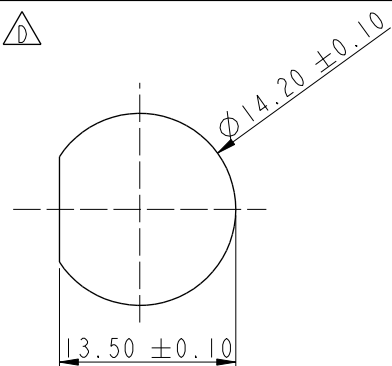


Recommended
Panel Cut-out

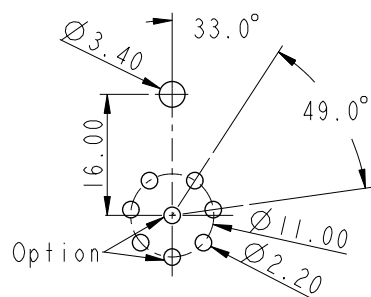

Recommended PCB Layout
Tolerance ± 0.05
ANGLES $\pm 1^\circ$




6P



8P

Pin Assignment Front View

UNIT:mm





TOLERANCE

± 0.25 mm

TITLE XLOK, A-2A, FRONT FASTENED M, M, PCB S, PUSH LOCK 			
SCALE 2:1	SIZE A4	SHEET 1	OF 1
REV. D	WC-REV. A.5	 Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司



ITEM NO	DRAWN BY Gill Lai	DATE 2019/05/22
DWG NO AU-XXPMMP-QC8001 	CHECKED BY Sam Ho	DATE 2019/05/22
CUSTOMER ALTW	APPROVED BY Fred Lee	DATE 2019/05/22

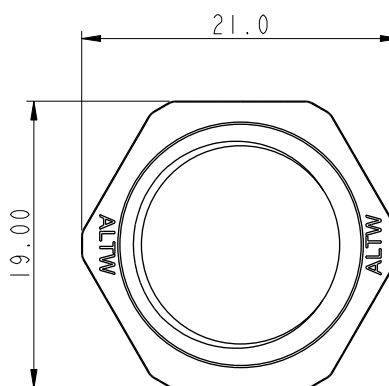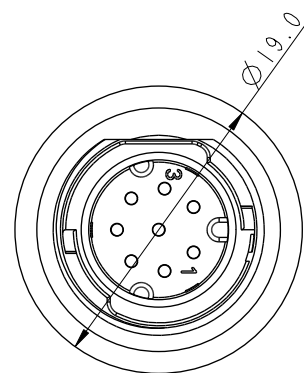

Nut



White Printing

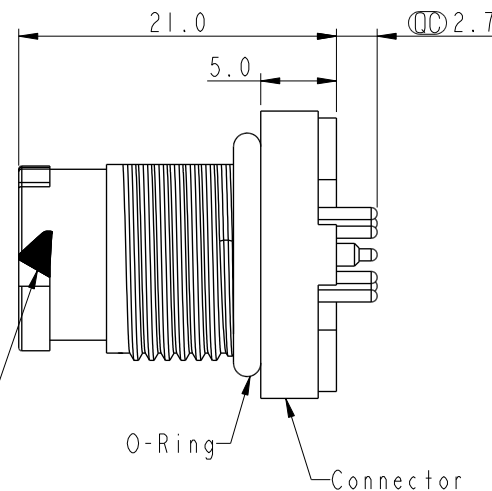

Note:  

- * RoHS Compliant
- *  Important dimension
- * Waterproof rate: IPX8, unmated 1m/24h
- * Connector
Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
- * Nut: Thermoplastic, Black
- * O-Ring: Rubber, Gray
- * Use with waterproof cap or dust cap
Panel thickness max: 3.0mm
- * Use without waterproof cap or dust cap
Panel thickness max: 4.0mm
- * For pcb thickness max: 2.0mm
- * Nut is packed separately in zipper bag

9/16" - 24 UNS