



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	FN-8C0097~100	2008/11/07	Ivan	Change to pin hole
D	FN1610423~426	2016/01/21	Ruru	Change Logo & Note
F	FN1790402~405	2017/09/27	Ruru	Update View

F
E
D
C
B
A

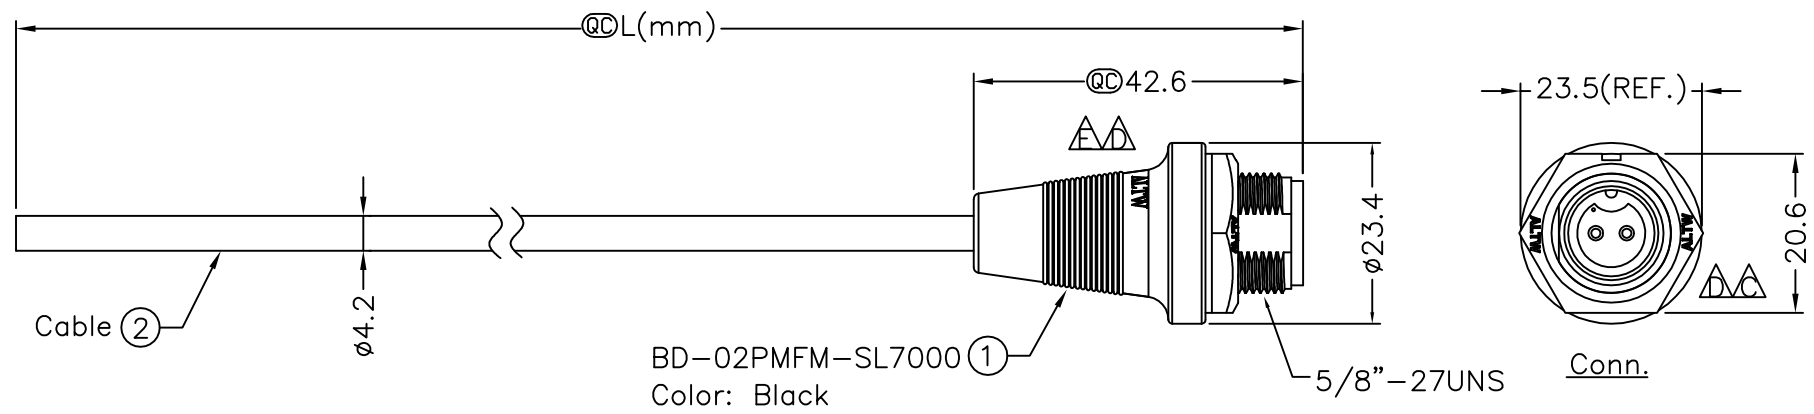


BD-02PMFM-SL7000 ①
Color: Black

2	Red 紅色
1	Black 黑色
Conn.	Wire Color



BD-02PMFM-SL7AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 ...
 99:99Meters
 Cable Length(L):01~99Meters

- Note:
- * QC Important Dimensions To Check.
 - * Waterproof Rate: IP67
 - * Housing: Black,Nylon+GF
 - * Female Pin: Copper Alloy,Gold Plated
 - * Gasket: Black,EPDM
 - * Nut: Black,Nylon+GF
 - * Cable: UL2464 24AWG*2C+Drain+Al/My PVC Jacket UV Resistant, OD=4.2, Black
 - Δ * Use with waterproof cap or dust cap Panel Thickness Max: 2.5mm
 - Δ * Use without waterproof cap or dust cap Panel Thickness Max: 3.5mm
 - Δ * Cable Length Tolerance: 01M: ± 40 mm
 02M~05M: ± 60 mm
 06M~10M: ± 100 mm
 11M~30M: ± 200 mm
 31M~99M: ± 500 mm

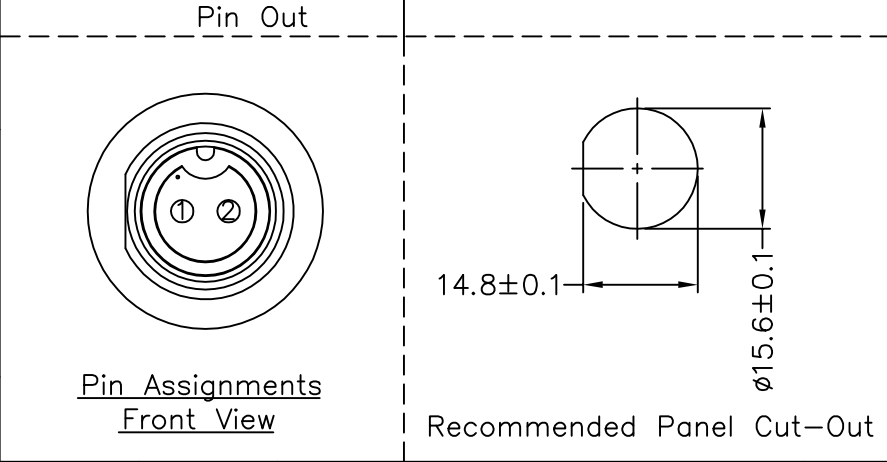

UNIT:mm		TITLE
TOLERANCE	± 0.5 mm	Standard,Cable Screw 2Pin M Conn. F Pin
SCALE	Free	SHEET 1 OF 1
REV. E	SIZE A4	QC : Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
BD-02PMFM-SL7AXX	Ruru	2017/09/27
ALTW	Rita	2017/09/27
	Max	2017/09/27

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.