

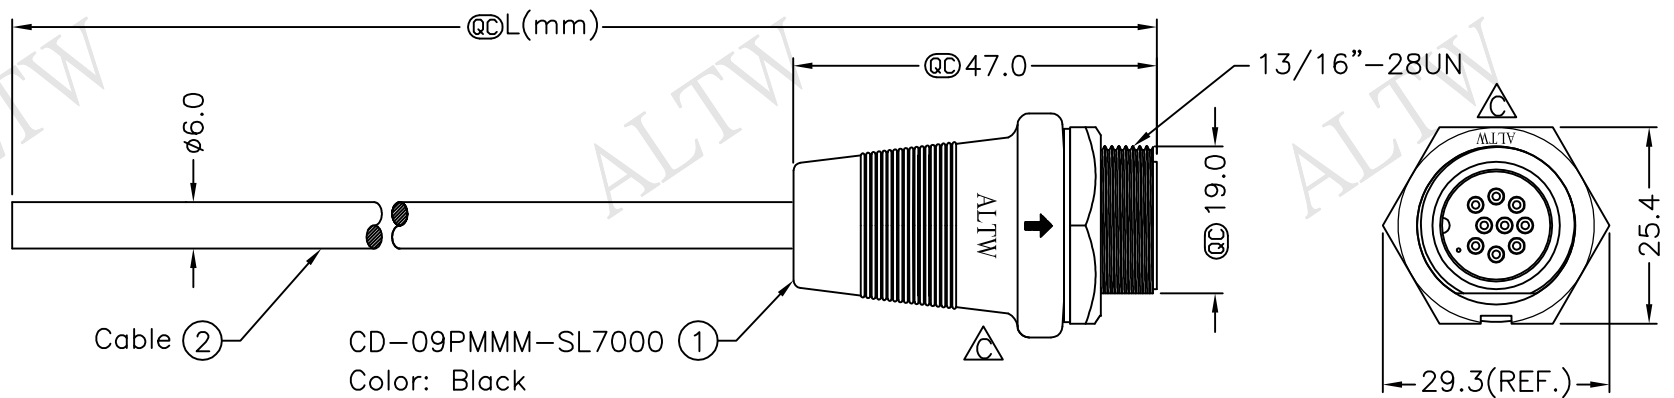


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8B0130~133	2008/09/25	Shin	Add Note
C	LEN1650052~055	2016/04/28	Ruru	Change Logo & Note




CD-09PMMM-SL7000 (1)
Color: Black

CD-09PMMM-SL7AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 ...
 99:99Meters
 Cable Length(L):01~99Meters

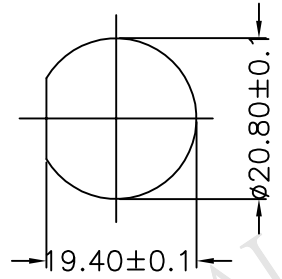

Recommended Panel Cut-Out



Pin Assignments Front View

9	Black	黑
8	Red	紅
7	Pink	粉紅
6	Gray	灰
5	Yellow	黃
4	Green	綠
3	White	白
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	
	Pin Out	

- Note:
- * @C Important Dimensions To Check.
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF,Black
 - * Male Pin: Copper Alloy,Gold Plated
 - * Cable: UL2464 24AWG*9C+D+AL/My Black,PVC Jacket UV Resistant, OD=6.0
 - △* Use with waterproof cap or dust cap
Panel Thickness Max: 1.2mm
 - △* Use without waterproof cap or dust cap
Panel Thickness Max: 2.0mm
 - △* Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE Middle, Cable Screw 9Pin M Conn M Pin	
SCALE Free	SHEET 1 OF 1
REV. C	SIZE A4 @C :Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	CD-09PMMM-SL7AXX
CUSTOMER	ALTW

DRAWN BY	Ruru	DATE	2016/04/28
CHECKED BY	Rita	DATE	2016/04/28
APPROVED BY	Lisa	DATE	2016/04/28

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.