
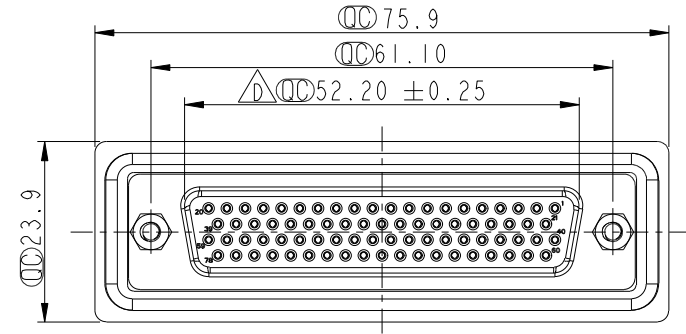
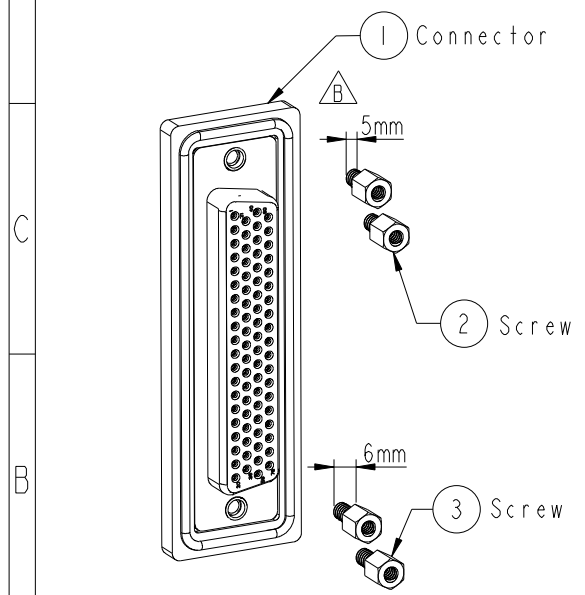
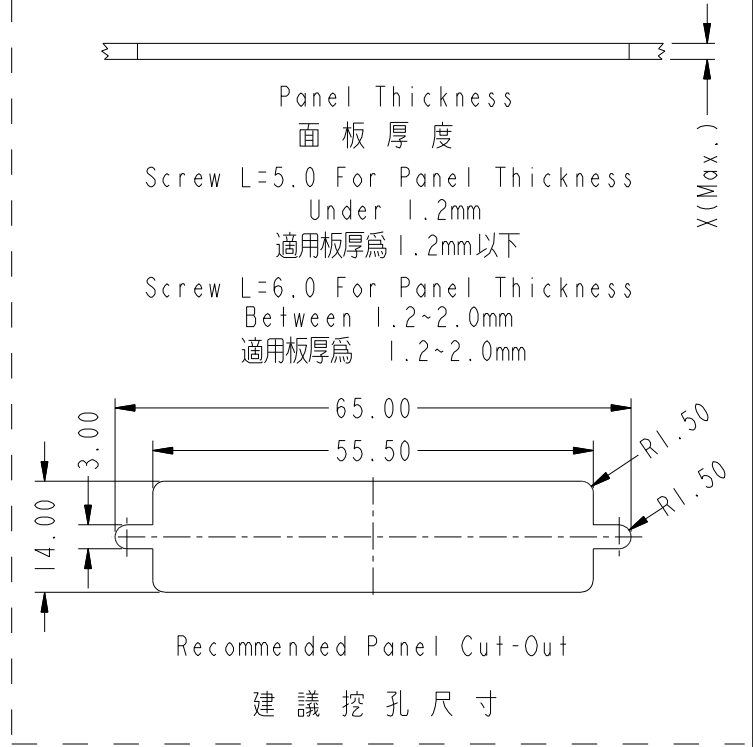


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE3-710143	2006/12/15	Gao Ling	Move O-ring to ZSE00100831
C	LEN-9A0286	2009/10/14	Vicky	Remove Pin Dim.
D	LEN1390044	2013/05/13	Lu Di	Update Dimensions

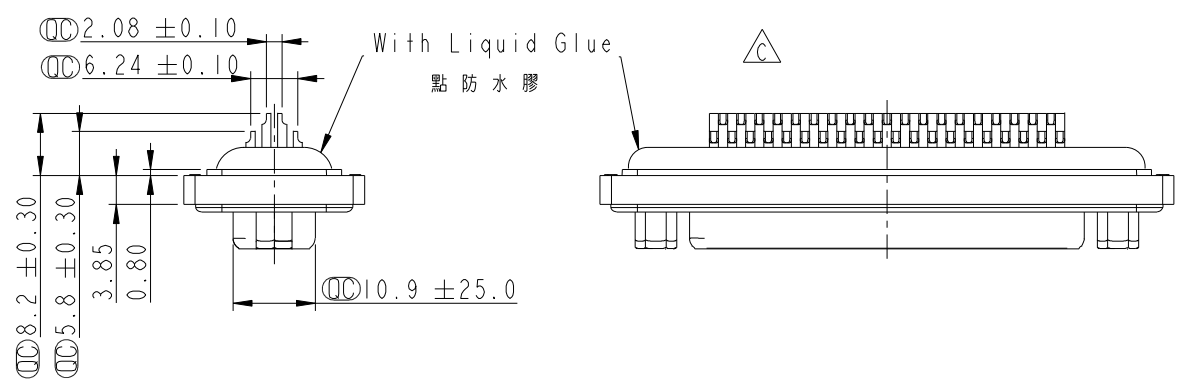

ALTW
CONFIDENTIAL
2013-05-13
R&D DEPT.

ALTW
DCC. DEPT.
CONFIDENTIAL
2013.09.05
ISSUED

- Note:
- * \varnothing Important Dimension.
 - * Waterproof Rate: IP67
 - * Do Mating Test After Glued (點膠後, 須作對插測試)
 - * Housing: Nylon+GF, Black.
 - * Connector: PBT, Black.
 - * Female Pin: Copper Alloy, Gold Plated.
 - * Ring: Silicone, Light Blue.
 - * Screw: Copper Alloy, Nickel Plated, #4-40 UNC.
 - * Applicable Wire Range: 24AWG-28AWG.
 - 適用電線範圍: 24AWG-28AWG

UNIT: mm		TITLE		Amphenol LTW		ITEM NO	DRAWN BY	DATE
TOLERANCE		D-SUB Conn. Panel Screw HD78P F Conn F Pin		安費諾亮泰企業股份有限公司		HDB-78PFFS-SL7001	Di_lu	2013-05-13
.X	± 0.25	SCALE	1:1	SIZE	A4	DWG NO	Mafei	2013-05-13
.XX	± 0.1	REV.	D	WC-REV.	A.3	CUSTOMER	Victor	2013-05-13
.XXX	± 0.05	SHEET 1 OF 1		R&D DEPT.		ALTW		
ANGLES	$\pm 1^\circ$	REV. D		WC-REV. A.3				