
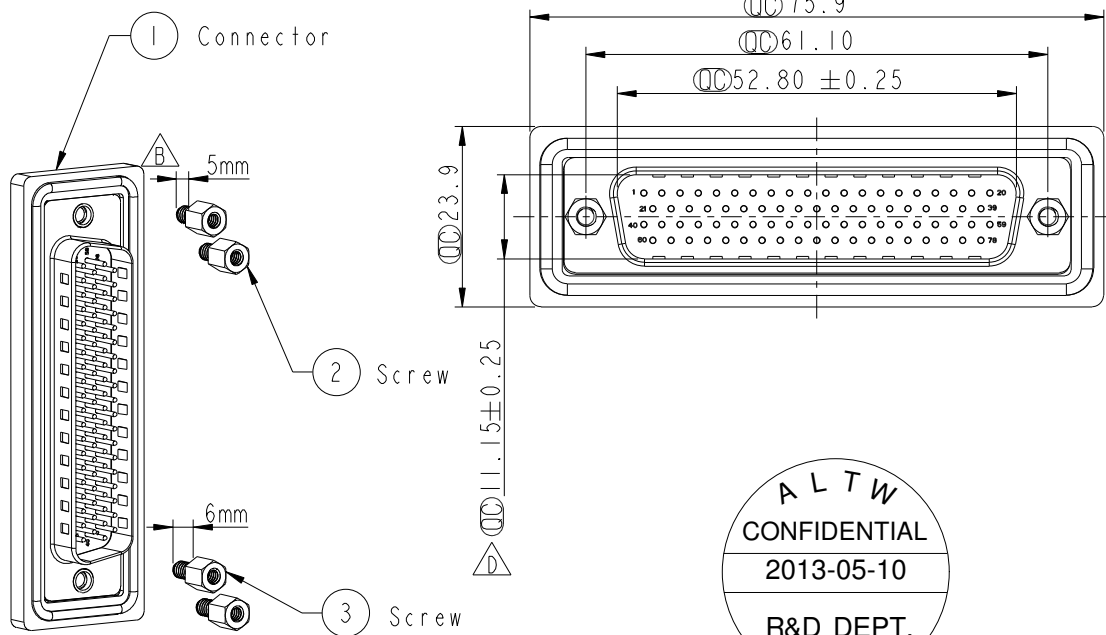


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE3-710143	2006/12/15	Gao Ling	Move O-ring to ZSE00100830
C	LEN-9A0287	2009/10/14	Vicky	Remove Pin Dim.
D	LEN1390046	2013/05/10	Lu Di	Change Dimensions

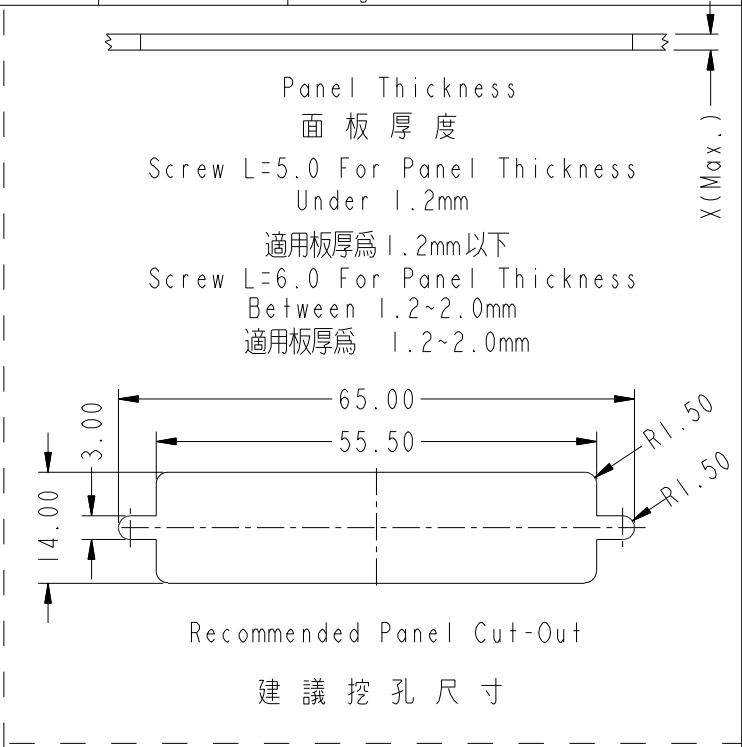

Note:

- * \varnothing Important Dimension.
- * Waterproof Rate: IP67
- * Do Mating Test After Glued
點膠後，須作對插測試
- $\triangle B$ * Housing: Nylon+GF, Black.
- $\triangle B$ * Connector: PBT, Black.
- $\triangle B$ * Male Pin: Copper Alloy, Gold Plated.
- * Ring: Silicone, Light Blue.
- $\triangle B$ * Screw: Copper Alloy, Nickel Plated, #4-40 UNC.
- * Applicable Wire Range: 24AWG-28AWG.
適用電線範圍：24AWG-28AWG

UNIT: mm TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°	TITLE D-SUB Conn. $\triangle B$ Panel Screw HD78P M Conn M Pin		<h1>Amphenol LTW</h1> 安費諾亮泰企業股份有限公司		ITEM NO HDB-78PMMS-SL7001	DRAWN BY Di_lu	DATE 2013-05-10
	SCALE 1:1	SIZE A4			SHEET 1 OF 1	DWG NO HDB-78PMMS-SL7001	CHECKED BY Mafei
	REV. D	WC-REV. A.4	\varnothing : Inspection item	CUSTOMER ALTW	APPROVED BY Victor	DATE 2013-05-10	