
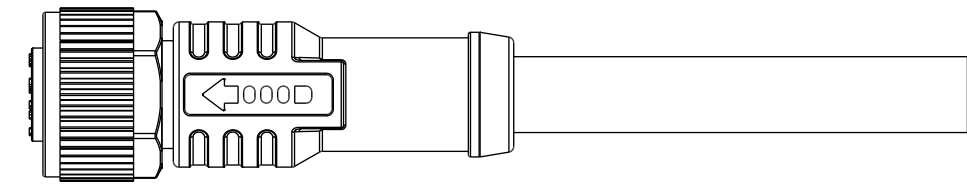
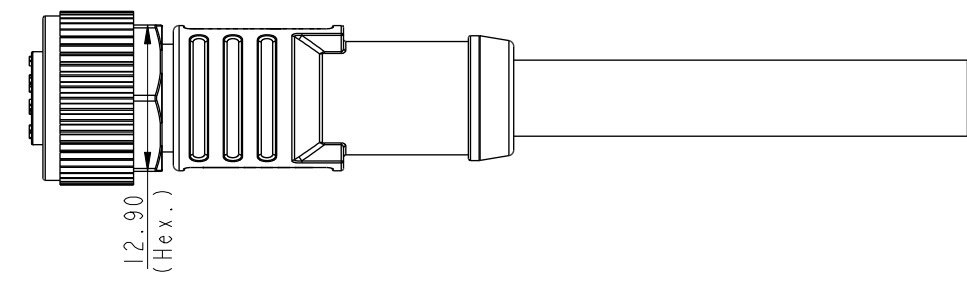



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C210220	2021/03/05	Vicky	$\triangle B$ X5

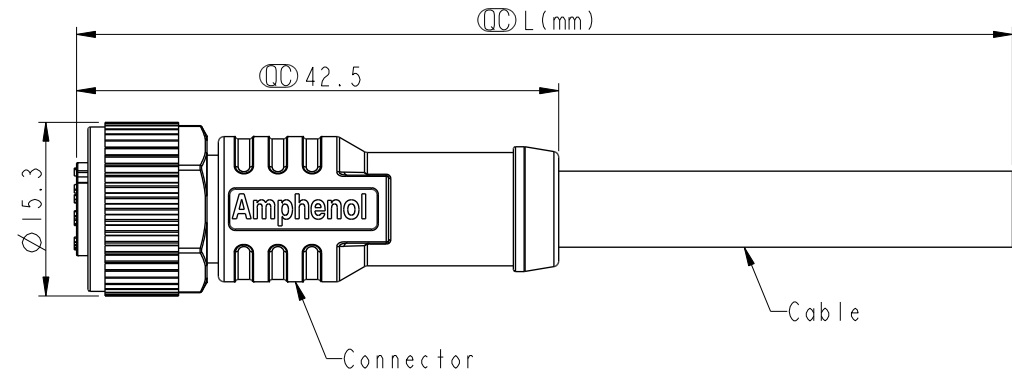

$\triangle B$

Note:

- * RoHS Compliant
- * \varnothing Important dimension
- * Waterproof rate: IPX8, mated 1m/24h
IPX9K, mated

- * Connector
- Housing: Thermoplastic, Black
- Pin: Copper alloy, Gold plated
- O-Ring: Rubber, Green
- Nut: Metal
- Outer mold: Thermoplastic, Black

- * Cable: UL20549, TPU Jacket, Black
- * Cable length tolerance: 1M: +50/-0 mm
- 1M < L ≤ 3M: +100/-0 mm
- 3M < L ≤ 5M: +150/-0 mm
- 5M < L ≤ 10M: ±100 mm
- 10M < L ≤ 20M: ±200 mm
- 20M < L ≤ 30M: ±300 mm
- 30M < L ≤ 99M: ±500 mm

UNIT: mm		TITLE	$\triangle B$
TOLERANCE	$\pm 0.5mm$	N SEN, M12 A, SCREW CABLE W/O SR, F, F, MOLDING	
SCALE	1:1	SIZE	A4
REV.	B	WC-REV.	.0
		SHEET	1 OF 2
		\varnothing	Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ouyang	2020-11-18
DWG NO	CHECKED BY	DATE
M12A-XXBFFM-SL8NXX	Jerry	2020-11-18
CUSTOMER	APPROVED BY	DATE
ALTW	Fred	2020-11-18

