
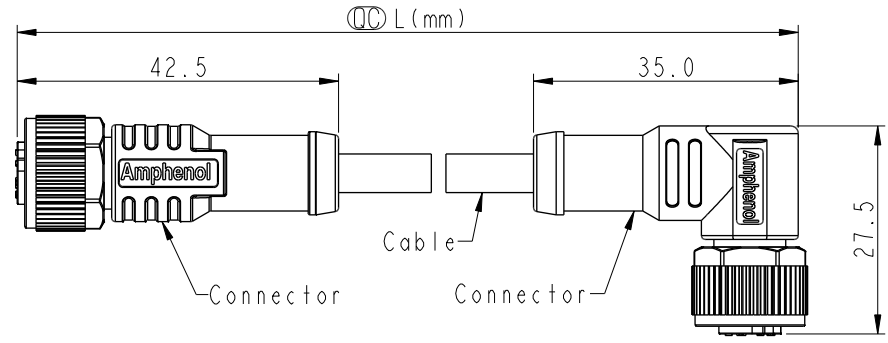


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C201740	2020/11/10	Vicky	$\triangle B$ X3
C	C210024	2021/01/12	Vicky	$\triangle C$ X1
D	C210235	2021/03/23	Ruru	$\triangle D$ X2



$\triangle B$ MI2BXXFL-12BFR-SBXXX

XX: No. Of Pin



- XXX: 0.5~99Meters
- A05: 0.5 Meter
- 001: 1 Meter
- 002: 2 Meters
- ...
- 099: 99 Meters

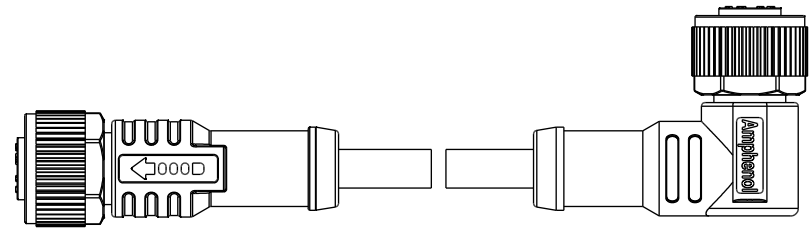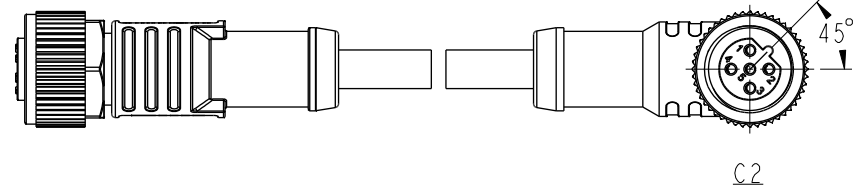

Note: $\triangle B \triangle C \triangle D$

- * RoHS Compliant
- * L Important dimension
- * C1
 - Waterproof rate: IPX8, mated 1m/24h
 - IPX9K, mated
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - O-Ring: Rubber, Green
 - Nut: Metal
 - Outer mold: Thermoplastic, Black
- * C2
 - Waterproof rate: IPX8, mated 1m/24h
 - IPX9K, mated
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - O-Ring: Rubber, Green
 - Nut: Metal
 - Outer mold: Thermoplastic, Black
- * Cable: UL20549, 22#*5C, OD=4.4mm, PUR Jacket, Black
- * Cable length tolerance:
 - 0.5M < L \leq 1M: +60/-0 mm
 - 1M < L \leq 3M: +120/-0 mm
 - 3M < L \leq 5M: +160/-0 mm
 - 5M < L \leq 10M: ± 100 mm
 - 10M < L \leq 20M: ± 200 mm
 - 20M < L \leq 30M: ± 300 mm
 - 30M < L \leq 99M: ± 500 mm

Pin Out	Wire	Color
5	Gary	灰
4	Black	黑
3	Blue	藍
2	White	白
1	Brown	棕

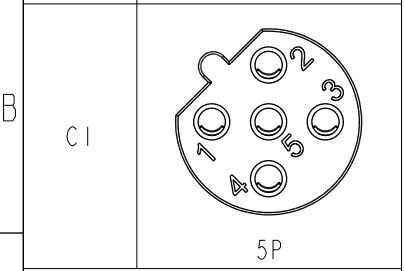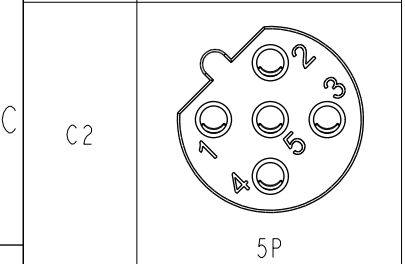

Pin Assignments Front View

UNIT:mm	
TOLERANCE	± 0.5 mm

TITLE ACC, SEN, B Code, DB-ENDED FF			
SCALE 1:2	SIZE A4	SHEET 1 OF 1	
REV. D	WC-REV.	L : Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Vicky	DATE 2018-12-11
DWG NO $\triangle B$ MI2BXXFL-12BFR-SBXXX	CHECKED BY Rita	DATE 2018-12-11
CUSTOMER ALTW	APPROVED BY Max	DATE 2018-12-11