




REV. B	ECN NO. LEN1720186~189	DATE 2017/02/10	SIGN Ruru	DESCRIPTION Change Logo & Outer Mold Design & Note
--------	------------------------	-----------------	-----------	----------------------------------------------------

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

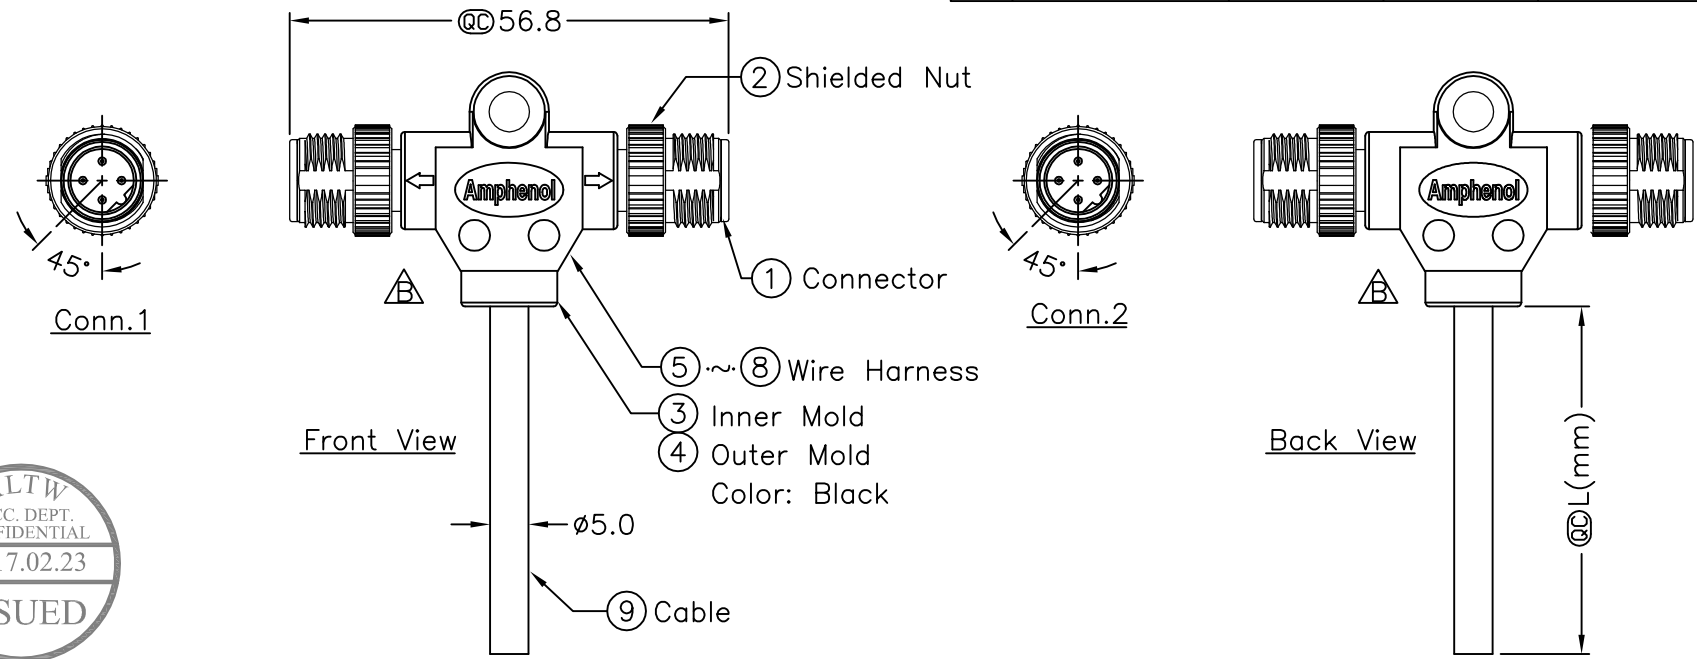

Conn.1&2
Pin Assignments
Front View

4	Black	黑	4
3	Blue	藍	3
2	White	白	2
1	Brown	棕	1
Conn.1	Wire Color		Conn.2
Pin Out			

SB-040400-MM0-TSAXX

↑
XX:01~99Meter
01:01Meter
02:02Meters
:
:
99:99Meters

Cable Length(L):01~99Meters

- Note:
- * @C Important Dimension.
 - * Waterproof Rate: IP68
 - * Housing: Black, Polyurethane
 - * Shielded Nut: Zinc Alloy, Nickel Plated
 - * Male Pin: Copper Alloy, Gold Plated
 - * Wire Harness: UL1007 24AWG, 4Pcs
 - * Cable: UL2464 22AWG*4C+Talc
Black, PVC Jacket UV Resistant OD=5.0mm
 - * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm

UNIT:mm	
TOLERANCE	
±0.5 mm	

TITLE		M12B Conn	
T Cable Screw MM Conn MM Pin			
SCALE	Free	SHEET	1 OF 1
REV.	B	SIZE	A4
@C :Inspection Item			

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	SB-040400-MM0-TSAXX
CUSTOMER	ALTW

DRAWN BY	Ruru	DATE	2017/02/10
CHECKED BY	Rita	DATE	2017/02/10
APPROVED BY	Max	DATE	2017/02/10