


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE31310050	2012/12/04	Kevin Wang	Modify the design and Note
C	LEN13A0123-125	2013/10/29	Yulong	Change the SR and View
D	LEN1760380-382	2017/07/06	Ouyang	Change Pin Out & Cable OD

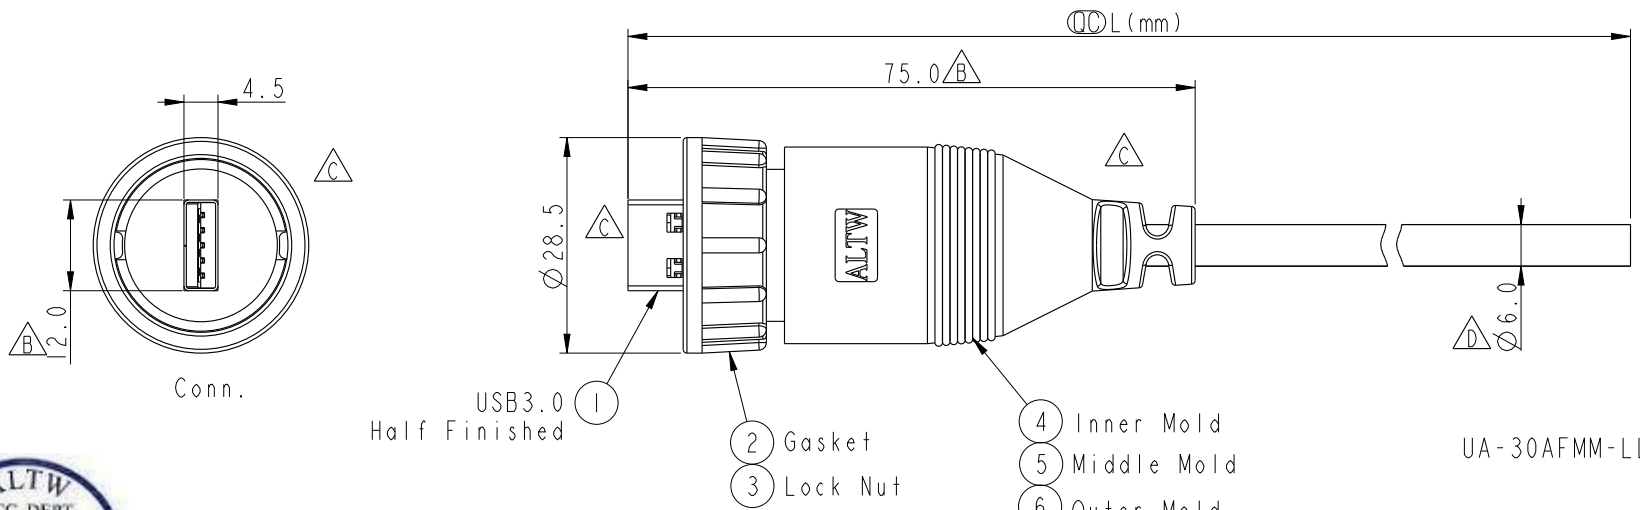


UA-30AFMM-LL7BXX


XX : 01~03Meters
 01 : 01Meter
 03 : 03Meters

Cable Length(L):01~03Meters

- Note:
- * QC Important Dimension.
 - * Waterproof Rate: IP67
 - * Connector: USB3.0-A Male, Black
 - * Gasket: Silicone, Gray
 - * Cable: UL2725 (1P \times 28#+DAM)*2+1P*28#+2C*28#+ABD, PVC Jacket, UV Resistant, OD=6.0mm, Black
 - * Cable Length Tolerance: 01M: \pm 40mm
02M~03M: \pm 60mm
 - * All of Drain twisted together.



Shield	Braid	編織	Shield	
9	Orange	28AWG 橙	SDP2+	Twist
8	Purple	28AWG 紫	SDP2-	
7	Drain	28AWG	SDP2_Drain	Twist
6	Yellow	28AWG 黃	SDP1+	
5	Blue	28AWG 藍	SDP1-	Twist
7	Drain	28AWG	SDP1_Drain	
4	Black	28AWG 黑	GND_PWRrt	Twist
3	Green	28AWG 綠	UTP_D+	
2	White	28AWG 白	UTP_D-	Twist
1	Red	28AWG 紅	PWR	
Conn.1	Wire Color		Signal Name	



Pin Assignments Front View

UNIT:mm	\pm 0.5	TITLE	USB 3.0, Cable Lock F Conn M Pin To M Plug		
SCALE	1:1	SIZE	A4	SHEET	1 OF 1
REV.	D	WC-REV.	B.3	QC : Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	UA-30AFMM-LL7BXX	DRAWN BY	Ouyang	DATE	2017-07-06
DWG NO	UA-30AFMM-LL7BXX	CHECKED BY	Feng-li	DATE	2017-07-06
CUSTOMER	ALTW	APPROVED BY	Jerry	DATE	2017-07-06

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.