


REV.	ECN NO.	DATE	SIGN.	DESCRIPTION
B	C210802	2021/05/19	Ruru	B X1
C	C211509	2021/09/22	Ruru	A X1
D	C220720	2022/05/16	Vicky	A X1

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


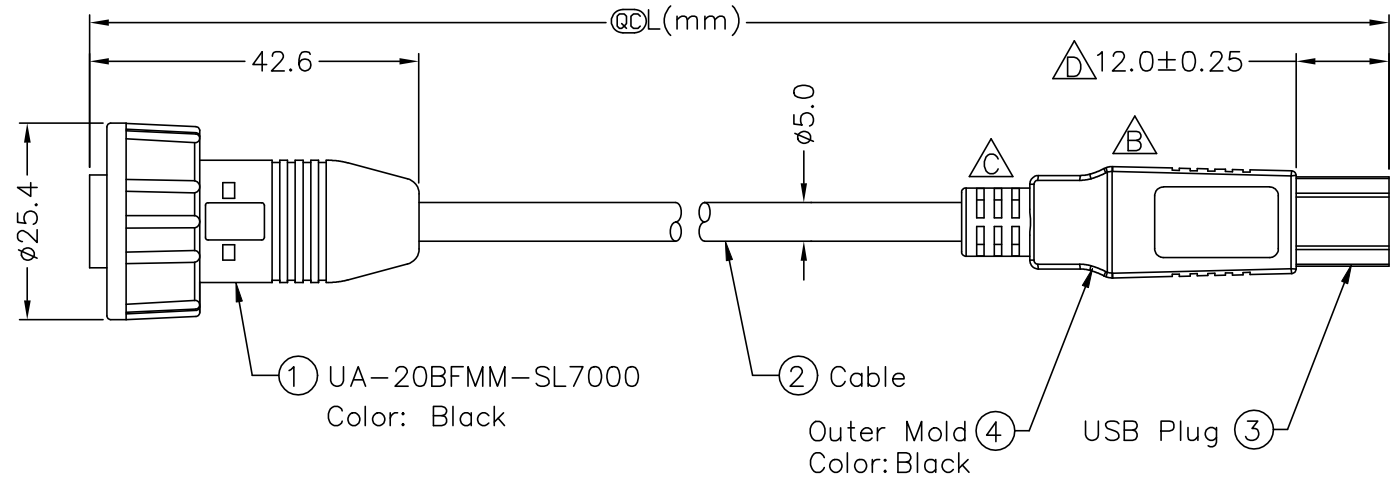


Conn.1
Waterproof Rate: IP67

Conn.2

UA20FL-NBML-SAXXX
 XXX: 01~05Meters
 001: 01Meter
 002: 02Meters
 ...
 005: 05Meters
 Cable Length(L): 01~05Meters

- Note:
- * @C Important Dimension.
 - * Housing: Thermoplastic, Black.
 - * USB A: Male Solder Type, Gold Plated.
 - * USB B: Male Solder Type, Gold Plated.
 - * Cable: USB2.0 28#*1P+24#*2C+Al.My+D+B, PVC Jacket,UV Resistant,Black,OD=5.0mm.
 - * Do Not Include On The Connector"
 - * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm



Shield	Drain 地線	Shield
4	Black 黑	4
3	Green 綠	3
2	White 白	2
1	Red 紅	1
Conn.1	Wire Color	Conn.2
Pin Out		

Twist

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE ACC, USB, A TYPE, DB-ENDED, FM	
SCALE Free	SHEET 1 OF 1
REV. D	SIZE A4
QC : Inspection Item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2020/08/21
DWG NO UA20FL-NBML-SAXXX	CHECKED BY Rita	DATE 2020/08/21
CUSTOMER ALTW	APPROVED BY Max	DATE 2020/08/21