


REV.	ECN NO.	DATE	SIGN.	DESCRIPTION
B	C210802	2021/05/19	Ruru	B X1
C	C211509	2021/09/22	Ruru	C X1
D	C220720	2022/05/16	Vicky	D X1

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

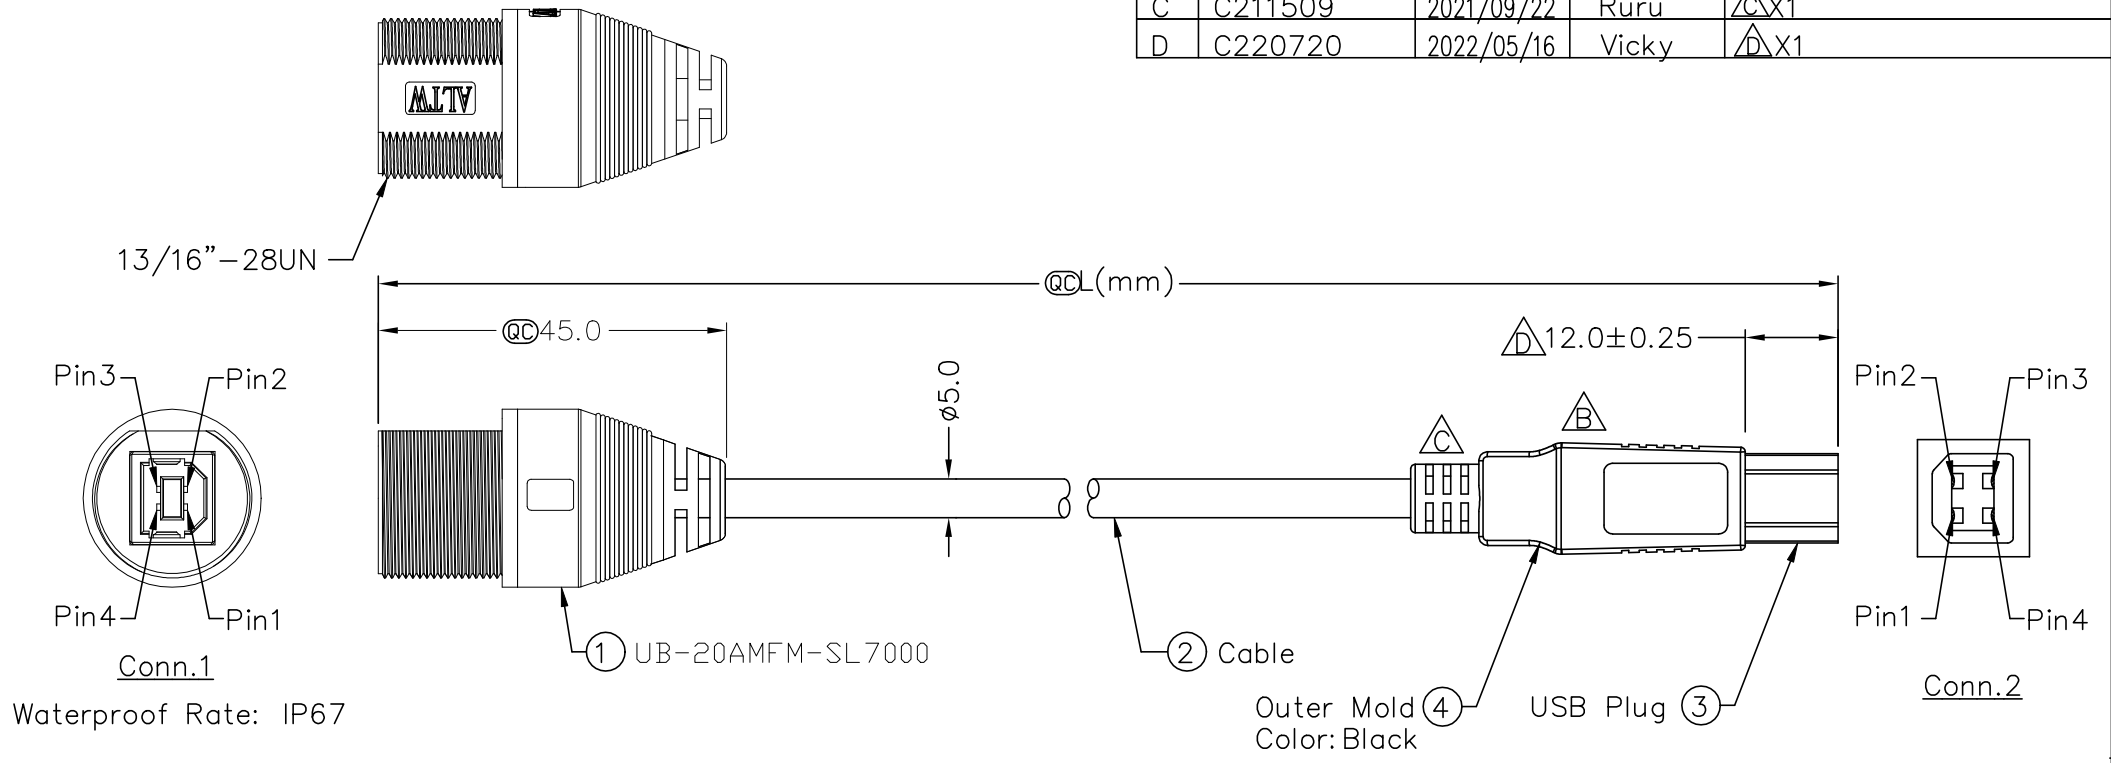

Waterproof Rate: IP67

UB20ML-NBML-SAXXX  
 XXX: 01~05Meters  
 001: 01Meter  
 002: 02Meters  
 :  
 :  
 005: 05Meters  
 Cable Length(L): 01~05Meters

- Note:
- \* @C Important Dimension.
  - \* Housing: Thermoplastic, Black.
  - \* USB B: Female Solder Type, Gold Plated.
  - \* USB B: Male Solder Type, Gold Plated.
  - \* Cable: USB2.0 28#\*1P+24#\*2C+Al.My+D+B, PVC Jacket, UV Resistant, Black, OD=5.0mm.
  - \* Do Not Include On The Connector"
  - \* Cable Length Tolerance: 01M: ±40mm  
02M~05M: ±60mm

Shield	Drain	地線	Shield
4	Black (24AWG) 黑		4
3	Green (28AWG) 綠		3
2	White (28AWG) 白		2
1	Red (24AWG) 紅		1
Conn.1	Wire Color		Conn.2
Pin Out			

Twist

UNIT: mm		TITLE ACC, USB, B TYPE, DB-ENDED, MM
TOLERANCE ±0.5 mm	SCALE Free	SHEET 1 OF 1
REV. D	SIZE A4	@C : Inspection Item

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2020/08/21
DWG NO UB20ML-NBML-SAXXX	CHECKED BY Rita	DATE 2020/08/21
CUSTOMER ALTW	APPROVED BY Max	DATE 2020/08/21