

1621566

https://www.phoenixcontact.com/us/products/1621566

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Device connector front mounting, series: SH, angled rotatable, shielded: yes, for standard and SPEEDCON interlock, No. of pos.: 8+4+PE, contact connection type: Pin, Crimp connection, Axial O-ring, 4x Ø 3.2, flange dimensions: 26 mm x 26 mm, coding: N

#### Your advantages

- Easy connection, thanks to infinitely adjustable cable outlet direction up to 310°
- · All housing can be fitted with pin or socket contacts
- · A total of eight contacts are available for signal transmission
- · Safe use in the field, thanks to high degree of protection
- Consistent EMC protection for reliable connection solutions in the industrial environment

#### Commercial data

Item number	1621566
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB33
Product key	ABRCDM
Catalog page	Page 120 (C-2-2019)
GTIN	4046356937146
Weight per piece (including packing)	139.2 g
Weight per piece (excluding packing)	126.8 g
Customs tariff number	85366990
Country of origin	DE



1621566

https://www.phoenixcontact.com/us/products/1621566

#### Technical data

#### Notes

Order information:	Crimp contacts, 8 x Ø 1 mm, 5 x Ø 2 mm, order separately
Safety note	
Safety note	WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.
	<ul> <li>WARNING: Commission properly functioning products only.         The products must be regularly inspected for damage.         Decommission defective products immediately. Replace damaged products. Repairs are not possible.     </li> </ul>
	<ul> <li>WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.</li> </ul>
	<ul> <li>The products are suitable for applications in plant, controller, and electrical device engineering.</li> </ul>
	<ul> <li>When operating the connectors in outdoor applications, they must be separately protected against environmental influences.</li> </ul>
	<ul> <li>Assembled products may not be manipulated or improperly opened.</li> </ul>
	<ul> <li>Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).</li> </ul>
	<ul> <li>When using the product in direct connection with third-party manufacturers, the user is responsible.</li> </ul>
	<ul> <li>For operating voltages &gt; 50 V AC, conductive connector housings must be grounded</li> </ul>
	Ensure that the protective or functional ground has been properly connected.
	VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector
	Only use tools recommended by Phoenix Contact
	<ul> <li>The installation notes/Design In documents online on the download page at phoenixcontact.com/products must be observed for this product.</li> </ul>
	<ul> <li>Operate the connector only when it is fully plugged in and interlocked.</li> </ul>
	<ul> <li>Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.</li> </ul>
	Observe the minimum bending radius of the cable. Lay the cable without twisting it.
	<ul> <li>The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting</li> </ul>



1621566

https://www.phoenixcontact.com/us/products/1621566

	warnings (e.g. DIN EN ISO 13732-1:2008-12).
punting	
Mounting	4x Ø 3.2
oduct properties	
Product type	Circular connectors (device side)
	, ,
Data management status	40
Article revision	10
mensions	
Housing	
Flange dimensions	26 mm x 26 mm
aterial specifications	
Flammability rating according to UL 94	V0
onnector	
Туре	angled rotatable
	angles reduced
Insulating body	
Note	Order information: Crimp contacts, 8 x Ø 1 mm, 5 x Ø 2 mm, order separately
Protection against electric shock	IEC 61984 and VDE 0623
Coding	N
Insulation body material	PA 6.6
Insertion/withdrawal cycles	100
Connection method	Crimp connection
Contact switching type	Pin
Application	Hybrid
Number of positions	13
Connection profile	8+4+PE 2 mm
Contact diameter Power contacts	
Litz wire cross-section Power contacts min.	0.25 mm²
Litz wire cross-section Power contacts max.	4 mm²
Rated current Power contacts	30 A
Rated surge voltage	6 kV
Rated voltage (II/3) power contact	850 V DC
Rated voltage (III/3) power contact	630 V AC
	1 mm
Contact diameter Signal contacts	1 111111
Contact diameter Signal contacts  Litz wire cross-section Signal contacts min.	0.06 mm²



1621566

https://www.phoenixcontact.com/us/products/1621566

Nominal current per signal contact	8 A
Note	for max. connection cross section
Rated surge voltage	1.5 kV
Rated voltage (III/3) signal contact	50 V
Installation height	2000 m
ousing	
Note	The suitability for assembly must be checked when fully assigned with maximum wire cross sections.
Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn)
Flange dimensions	26 mm x 26 mm
Type of locking	for standard and SPEEDCON interlock
Pg screw connection	none
Degree of protection (plugged in)	IP67
	IP68
	IP69K
Thread type	M23

#### Environmental and real-life conditions

#### Ambient conditions

Ambient temperature (operation)	-40 °C 115 °C (see derating curve)
Ambient temperature (storage/transport)	15 °C 25 °C
Permissible humidity (storage/transport)	50 % 65 %





1621566

https://www.phoenixcontact.com/us/products/1621566

#### **Drawings**

Dimensional drawing

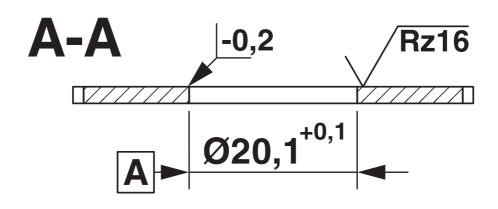

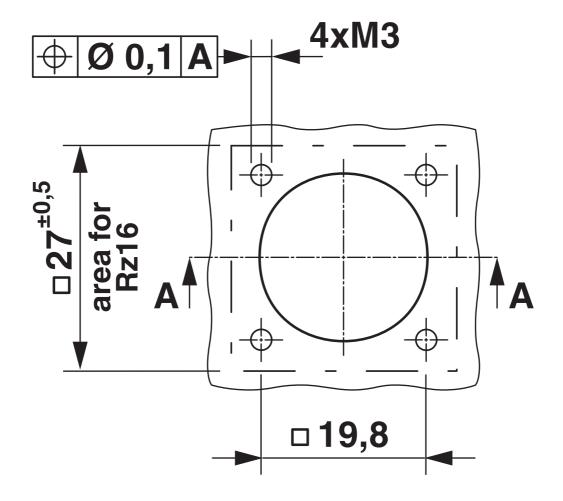


Installation dimensions



1621566

https://www.phoenixcontact.com/us/products/1621566



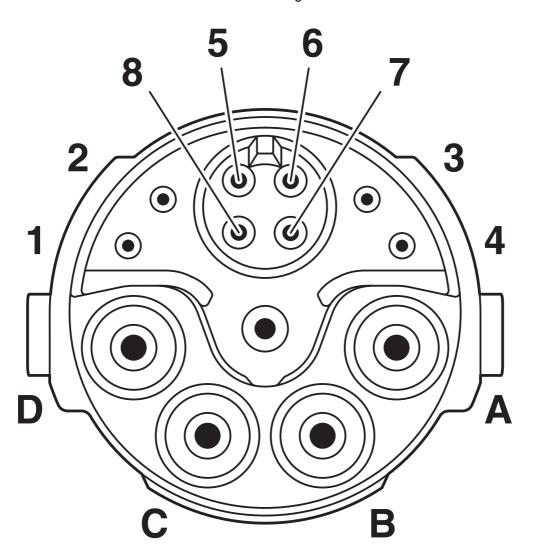


Pin assignment of pin, signal



1621566

https://www.phoenixcontact.com/us/products/1621566

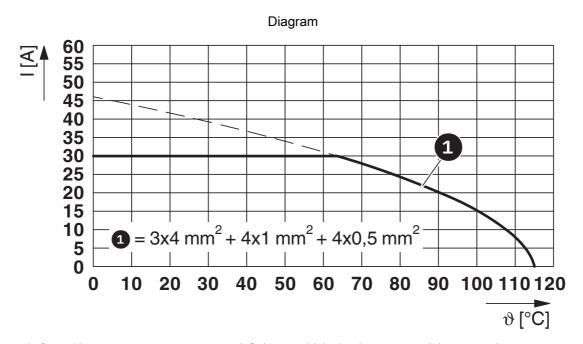

I = current strength,  $\vartheta$  = ambient temperature, power contacts A-C: 3 x up to 30 A, signal contacts: 4 x 2 A constant, data contacts: 4 x 1 A constant



1621566

https://www.phoenixcontact.com/us/products/1621566

#### **Approvals**

🌣 To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1621566



cUL Recognized

Approval ID: E153698-20181206



**UL Recognized** 

Approval ID: E153698-20181206

cULus Recognized



1621566

https://www.phoenixcontact.com/us/products/1621566

### Classifications

#### **ECLASS**

	ECLASS-11.0	27440109
	ECLASS-12.0	27440109
	ECLASS-13.0	27440109
ETIM		
	ETIM 9.0	EC003569
UNSPSC		
	UNSPSC 21.0	39121400



1621566

https://www.phoenixcontact.com/us/products/1621566

### Environmental product compliance

#### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com