


Hex Code Table		
✓ FCXXXX	Length (L)	
FC2999	1/8	
FC2300	3/16	
FC2301	1/4	
FC2302	5/16	
FC2303	3/8	
FC2304	7/16	
FC2305	1/2	
FC2306	9/16	
FC2307	5/8	
FC2308	11/16	
FC2309	3/4	
FC2310	13/16	
FC2311	7/8	
FC2312	15/16	
FC2313	1	
FC2314	1-1/16	
FC2315	1-1/8	
FC2316	1-3/16	
FC2317	1-1/4	
FC2318	1-5/16	
FC2319	1-3/8	
FC2320	1-7/16	
FC2321	1-1/2	
FC2322	1-9/16	
FC2323	1-5/8	
FC2324	1-11/16	
FC2325	1-3/4	
FC2326	1-13/16	
FC2327	1-7/8	
FC2328	1-15/16	
FC2329	2	
FC2330	2-1/8	
FC2331	2-1/4	
FC2332	2-3/8	
FC2333	2-1/2	
FC2334	2-5/8	
FC2335	2-3/4	
FC2336	2-7/8	
FC2337	3	
FC2338	3-1/4	
FC2339	3-1/2	
FC2340	3-3/4	
FC2341	4	
FC2342	4-1/4	
FC2343	4-1/2	
FC2344	4-3/4	
FC2345	5	
FC2346	5-1/4	
FC2347	5-1/2	
FC2348	5-3/4	
FC2349	6	

1/2 Hex Female Standoff

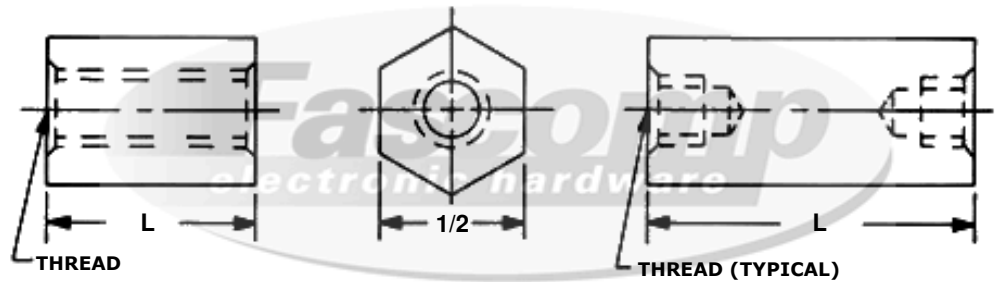

Create a part number:

Length	Thread	Material	Finish
FCXXXX	XXX	XX	XX
_____ - _____ - _____ - _____			

Thread				
✓ Thread Code (XXX)	Tapped Thru		Longer Parts	
	A, B, S	SS	Blind Tap Depth	
632	1	1	3/8	
832	1	1	7/16	
1032	1-1/8	1	1/2	
1224	1-1/8	1	1/2	
2520	1-1/4	1-1/4	5/8	

Aluminum (A), Brass (B), Steel (S), Stainless Steel (SS)

Material	
✓ Material Code (XX)	
A	Aluminum
B	Brass
S	Steel
SS	Stainless Steel
N	Nylon

Tolerances Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

✓ Compatible Finish	
A, B, S, SS	0 - Plain
B, S	5 - Nickel Plate (QQ-N-290)
A	6 - Iridite #14 Gold (MIL-C-5541E)
A	7 - Iridite Clear (MIL-C-5541E)
A	9 - Alodine 1200
B, S	12 - Zinc Clear (ASTM-B-633)
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
SS	20 - Passivation (MIL-F-14072D)
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
A	24 - Black Anodize (MIL-A-8625)
B, S, SS	26 - Black Oxide
B, S	28 - Zinc Yellow (ASTM-B-633)



Fascomp Electronic Hardware
 7814 Kingspointe Pkwy
 Orlando, FL 32819
 www.fascomp.com
 Tel: (407) 226-2112
 Fax: (407) 226-3370

Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed or used as a basis for manufacturing without written permission from Fascomp Inc.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Fascomp:

[FC2303-1032-SS](#) [FC2303-2520-SS](#) [FC2305-1032-SS](#) [FC2305-2520-SS](#) [FC2307-1032-A](#) [FC2307-1032-SS](#)
[FC2301-1032-A](#) [FC2301-2520-A](#) [FC2301-2520-SS](#) [FC2303-1032-A](#) [FC2303-2520-A](#) [FC2305-1032-A](#) [FC2305-2520-](#)
[A](#) [FC2321-2520-SS](#) [FC2329-1032-A](#) [FC2333-1032-A](#) [FC2329-2520-A](#) [FC2329-2520-SS](#) [FC2301-1032-SS](#) [FC2333-](#)
[2520-SS](#) [FC2337-1032-A](#) [FC2337-1032-SS](#) [FC2337-2520-A](#) [FC2337-2520-SS](#) [FC2321-1032-A](#) [FC2321-1032-SS](#)
[FC2321-2520-A](#) [FC2329-1032-SS](#) [FC2333-1032-SS](#) [FC2333-2520-A](#) [FC2313-2520-A](#) [FC2313-2520-SS](#) [FC2317-](#)
[1032-A](#) [FC2317-1032-SS](#) [FC2317-2520-A](#) [FC2317-2520-SS](#) [FC2311-1032-A](#) [FC2311-1032-SS](#) [FC2311-2520-A](#)
[FC2311-2520-SS](#) [FC2313-1032-A](#) [FC2313-1032-SS](#) [FC2307-2520-A](#) [FC2307-2520-SS](#) [FC2309-1032-A](#) [FC2309-](#)
[1032-SS](#) [FC2309-2520-A](#) [FC2309-2520-SS](#)