


OPT-60DC/ 48DC/100 - Miniature solid-state relay



2966621

<https://www.phoenixcontact.com/us/products/2966621>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Plug-in miniature solid-state relay, input solid-state relay, 1 N/O contact, input: 60 V DC, output: 3 - 48 V DC/100 mA

Your advantages

- Vibration and shock resistant
- RT III-proof (wash-proof)
- Wear-free and durable
- Can be soldered on PCB
- Zero voltage switch at AC output
- Switching power of up to 24 V DC/5 A

Commercial data

Item number	2966621
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	C460
Product key	CK69K1
Catalog page	Page 396 (C-5-2019)
GTIN	4017918130473
Weight per piece (including packing)	5.22 g
Weight per piece (excluding packing)	5.22 g
Customs tariff number	85364110
Country of origin	HU

OPT-60DC/ 48DC/100 - Miniature solid-state relay



2966621

<https://www.phoenixcontact.com/us/products/2966621>

Technical data

Product properties

Date of last data management	29.05.2024
Product type	Single solid-state relay
Operating mode	100% operating factor

Insulation characteristics

Insulation	Basic insulation
------------	------------------

Insulation characteristics: Standards/regulations

Insulation	Basic insulation
Overvoltage category	III
Pollution degree	2

Electrical properties

Maximum power dissipation for nominal condition	0.18 W
Test voltage (Input/output)	2.5 kV (50 Hz, 1 min., input/output)

Input data

Nominal input voltage U_N	60 V DC
Input voltage range in reference to U_N	0.9 ... 1.1
Input voltage range	54 V DC ... 66 V DC
Switching threshold "0" signal, voltage	≤ 40 V
Switching threshold "1" signal voltage	≥ 52 V
Typical input current at U_N	3 mA
Typical response time	50 μ s (at U_N)
Typical turn-off time	800 μ s (at U_N)
Transmission frequency	100 Hz

Output data

Contact switching type	1 N/O contact
Design of digital output	electronic
Output voltage range	3 V DC ... 48 V DC
Limiting continuous current	100 mA
Voltage drop at max. limiting continuous current	≤ 1 V
Output circuit	2-conductor, floating
Protective circuit	Reverse polarity protection; Polarity protection diode Surge protection

Dimensions

Width	5 mm
Height	28 mm
Depth	15 mm

OPT-60DC/ 48DC/100 - Miniature solid-state relay



2966621

<https://www.phoenixcontact.com/us/products/2966621>

Material specifications

Color	black (RAL 9005)
-------	------------------

Environmental and real-life conditions

Ambient conditions

Degree of protection	RT III
Ambient temperature (operation)	-25 °C ... 60 °C
Ambient temperature (storage/transport)	-25 °C ... 70 °C

Approvals

Corrosive gas test

Identification	ISA-S71.04. G3 Harsh Group
	EN 60068-2-60

Standards and regulations

Standards/regulations

Standards/regulations	IEC 60664
	EN 50178

Mounting


Assembly note	in rows with zero spacing
Mounting position	any

2966621

<https://www.phoenixcontact.com/us/products/2966621>


Drawings

Drilling plan/solder pad geometry

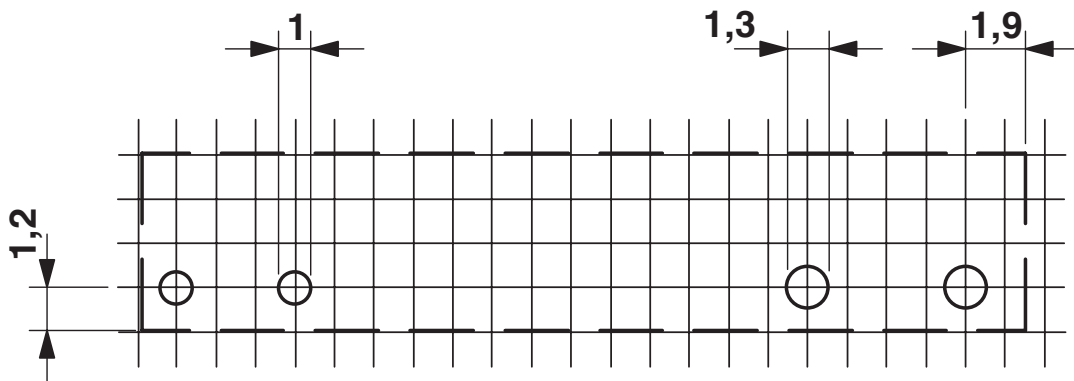

a = pitch division 1.25 mm and 1.27 mm

Circuit diagram

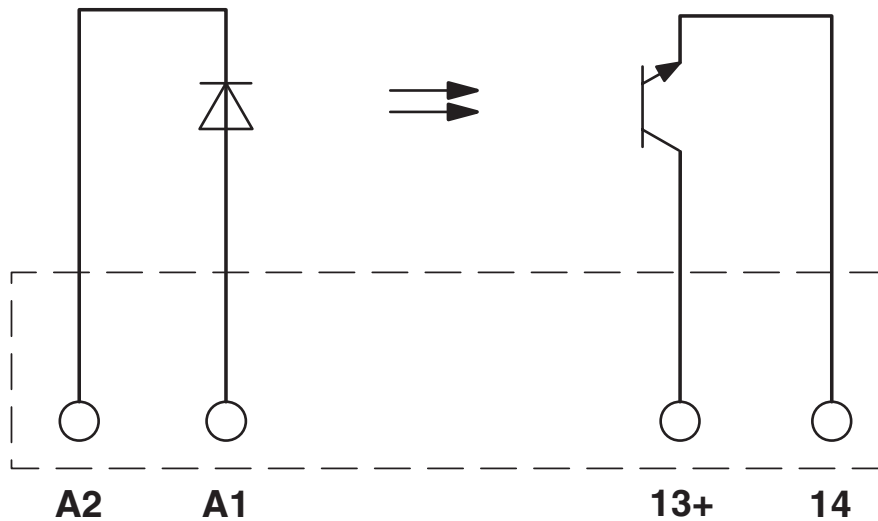

OPT-60DC/ 48DC/100 - Miniature solid-state relay



2966621

<https://www.phoenixcontact.com/us/products/2966621>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2966621>



cUL Recognized
Approval ID: FILE E 195083



UL Recognized
Approval ID: FILE E 195083



EAC
Approval ID: TR_TS_D_00573_c



UL Recognized
Approval ID: FILE E 195083



EAC
Approval ID: RU*C-DE.*08.B.00010



cUL Recognized
Approval ID: FILE E 195083



GL
Approval ID: 46016-03 HH

OPT-60DC/ 48DC/100 - Miniature solid-state relay



2966621

<https://www.phoenixcontact.com/us/products/2966621>

Classifications

ECLASS

ECLASS-11.0	27371604
ECLASS-12.0	27371604
ECLASS-13.0	27371604

ETIM

ETIM 9.0	EC001504
----------	----------

UNSPSC

UNSPSC 21.0	39122300
-------------	----------

OPT-60DC/ 48DC/100 - Miniature solid-state relay



2966621

<https://www.phoenixcontact.com/us/products/2966621>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

OPT-60DC/ 48DC/100 - Miniature solid-state relay



2966621

<https://www.phoenixcontact.com/us/products/2966621>

Mandatory accessories

PLC-BPT-120UC/21 - Relay base

2900280

<https://www.phoenixcontact.com/us/products/2900280>



6.2 mm PLC basic terminal block with Push-in connection, without relay or solid-state relay, for mounting on DIN rail NS 35/7,5, 1 changeover contact, input voltage 120 V AC/DC

PLC-BSC-120UC/21 - Relay base

2966032

<https://www.phoenixcontact.com/us/products/2966032>



6.2 mm PLC basic terminal block with screw connection, without relay or solid-state relay, for mounting on DIN rail NS 35/7,5, 1 changeover contact, input voltage 120 V AC/DC

OPT-60DC/ 48DC/100 - Miniature solid-state relay



2966621

<https://www.phoenixcontact.com/us/products/2966621>

PLC-BPT-230UC/21 - Relay base

2900281

<https://www.phoenixcontact.com/us/products/2900281>



6.2 mm PLC basic terminal block with Push-in connection, without relay or solid-state relay, for mounting on DIN rail NS 35/7,5, 1 changeover contact, input voltage 230 V AC/DC

PLC-BSC-230UC/21 - Relay base

2966045

<https://www.phoenixcontact.com/us/products/2966045>



6.2 mm PLC basic terminal block with screw connection, without relay or solid-state relay, for mounting on DIN rail NS 35/7,5, 1 changeover contact, input voltage 230 V AC/DC

OPT-60DC/ 48DC/100 - Miniature solid-state relay



2966621

<https://www.phoenixcontact.com/us/products/2966621>

PLC-BPT-120UC/ 1/SEN - Relay base

2900451

<https://www.phoenixcontact.com/us/products/2900451>



6.2 mm PLC basic terminal block for input functions with push-in connection, without relay or solid-state relay, for mounting on DIN rail NS 35/7,5, with sensor supply voltage distribution (BB), 1 N/O contact, input voltage 120 V AC/DC

PLC-BSC-120UC/ 1/SEN - Relay base

2966074

<https://www.phoenixcontact.com/us/products/2966074>



6.2 mm PLC basic terminal block for input functions with screw connection, without relay or solid-state relay, for mounting on DIN rail NS 35/7,5, with sensor supply voltage distribution (BB), 1 N/O contact, input voltage 120 V AC/DC

OPT-60DC/ 48DC/100 - Miniature solid-state relay



2966621

<https://www.phoenixcontact.com/us/products/2966621>

PLC-BPT-230UC/ 1/SEN - Relay base

2900452

<https://www.phoenixcontact.com/us/products/2900452>



6.2 mm PLC basic terminal block for input functions with push-in connection, without relay or solid-state relay, for mounting on DIN rail NS 35/7,5, with sensor supply voltage distribution (BB), 1 N/O contact, input voltage 230 V AC/DC

PLC-BSC-230UC/ 1/SEN - Relay base

2966087

<https://www.phoenixcontact.com/us/products/2966087>



6.2 mm PLC basic terminal block for input functions with screw connection, without relay or solid-state relay, for mounting on NS 35/7,5 DIN rail, with sensor supply voltage distribution (BB), 1 N/O contact, input voltage: 230 V AC/DC

OPT-60DC/ 48DC/100 - Miniature solid-state relay



2966621

<https://www.phoenixcontact.com/us/products/2966621>

PLC-BPT-120UC/21/SO46 - Relay base

2900453

<https://www.phoenixcontact.com/us/products/2900453>



6.2 mm PLC basic terminal block against interference currents/voltages on the control side with Push-in connection, without relay or solid-state relay, for mounting on DIN rail NS 35/7,5, with integrated RCZ filter, 1 changeover contact, input voltage 120 V AC

PLC-BSC-120UC/21/SO46 - Relay base

2980319

<https://www.phoenixcontact.com/us/products/2980319>



6.2 mm PLC basic terminal block with protection against interference currents/voltages on the control side, with screw connection, without relay or solid-state relay, for mounting on DIN rail NS 35/7,5, with integrated RCZ filter, 1 changeover contact, input voltage 120 V AC

OPT-60DC/ 48DC/100 - Miniature solid-state relay

2966621

<https://www.phoenixcontact.com/us/products/2966621>

PLC-BPT-230UC/21/SO46 - Relay base

2900455

<https://www.phoenixcontact.com/us/products/2900455>



6.2 mm PLC basic terminal block against interference currents/voltages on the control side with Push-in connection, without relay or solid-state relay, for mounting on DIN rail NS 35/7,5, with integrated RCZ filter, 1 changeover contact, input voltage 230 V AC

PLC-BSC-230UC/21/SO46 - Relay base

2980335

<https://www.phoenixcontact.com/us/products/2980335>



6.2 mm PLC basic terminal block with protection against interference currents/voltages on the control side, with screw connection, without relay or solid-state relay, for mounting on DIN rail NS 35/7,5, with integrated RCZ filter, 1 changeover contact, input voltage 230 V AC

OPT-60DC/ 48DC/100 - Miniature solid-state relay



2966621

<https://www.phoenixcontact.com/us/products/2966621>

PLC-BSC-120UC/ 1/SEN/SO46 - Relay base

2980322

<https://www.phoenixcontact.com/us/products/2980322>



6.2 mm PLC basic terminal block with interference current and interference voltage protection on the control side, with screw connection, without relay or solid-state relay, with sensor supply voltage distribution (BB), 1 N/O contact, input voltage 120 V AC

PLC-BPT-230UC/ 1/SEN/SO46 - Relay base

2900457

<https://www.phoenixcontact.com/us/products/2900457>



6.2 mm PLC basic terminal block with interference current and interference voltage protection on the control side, with push-in connection, without relay or solid-state relay, with sensor supply voltage distribution (BB), 1 N/O contact, input voltage 230 V AC

OPT-60DC/ 48DC/100 - Miniature solid-state relay



2966621

<https://www.phoenixcontact.com/us/products/2966621>

PLC-BSC-230UC/ 1/SEN/SO46 - Relay base

2980348

<https://www.phoenixcontact.com/us/products/2980348>



6.2 mm PLC basic terminal block with interference current and interference voltage protection on the control side, with screw connection, without relay or solid-state relay, with sensor supply voltage distribution (BB), 1 N/O contact, input voltage 230 V AC

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com