

# FR107W

## Surface Mount Fast Recovery Rectifiers

### Forward Current - 1 A

#### FEATURES

- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Easy to pick and place
- Fast reverse recovery time
- Lead free in comply with EU RoHS 2011/65/EU directives

#### PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode



Simplified outline SOD-123F and symbol

#### MECHANICAL DATA

- Case: SOD-123F
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 15mg 0.00053oz

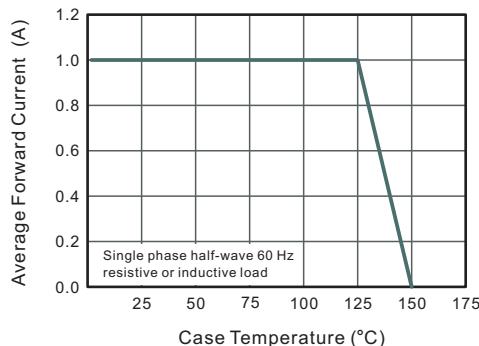
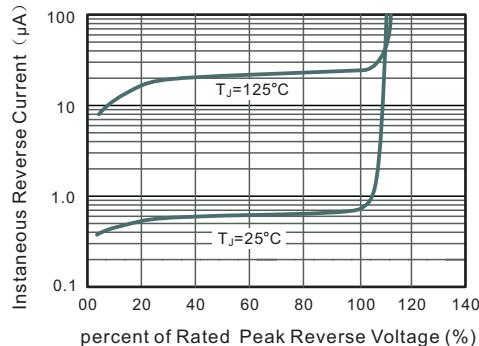
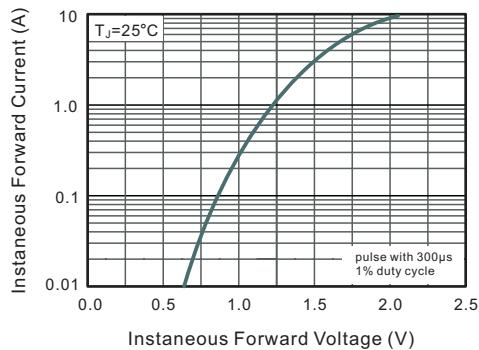
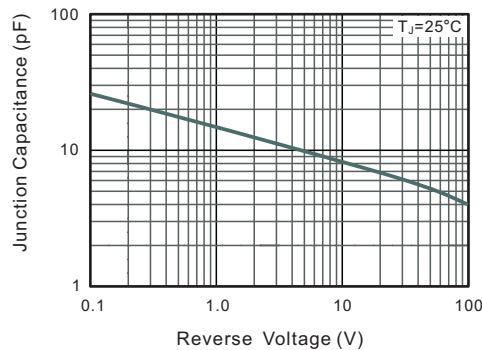
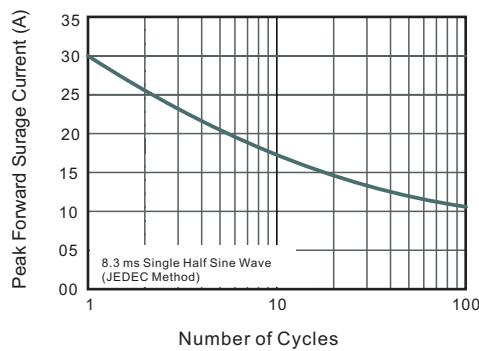
#### Absolute Maximum Ratings and Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbols	FR107W	Units
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	1000	V
Maximum RMS voltage	$V_{RMS}$	700	V
Maximum DC Blocking Voltage	$V_{DC}$	1000	V
Maximum Average Forward Rectified Current at $T_c = 125^\circ\text{C}$	$I_{F(AV)}$	1	A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load	$I_{FSM}$	30	A
Maximum Forward Voltage at 1 A	$V_F$	1.3	V
Maximum DC Reverse Current $T_a = 25^\circ\text{C}$ at Rated DC Blocking Voltage $T_a = 125^\circ\text{C}$	$I_R$	5 100	$\mu\text{A}$
Typical Junction Capacitance at $V_R=4\text{V}$ , $f=1\text{MHz}$	$C_j$	15	pF
Maximum Reverse Recovery Time <sup>(1)</sup>	$t_{rr}$	500	ns
Typical Thermal Resistance <sup>(2)</sup>	$R_{\theta JA}$	85	°C/W
Operating and Storage Temperature Range	$T_j, T_{stg}$	-55 ~ +150	°C

(1) Measured with  $I_F = 0.5 \text{ A}$ ,  $I_R = 1 \text{ A}$ ,  $I_{rr} = 0.25 \text{ A}$ .

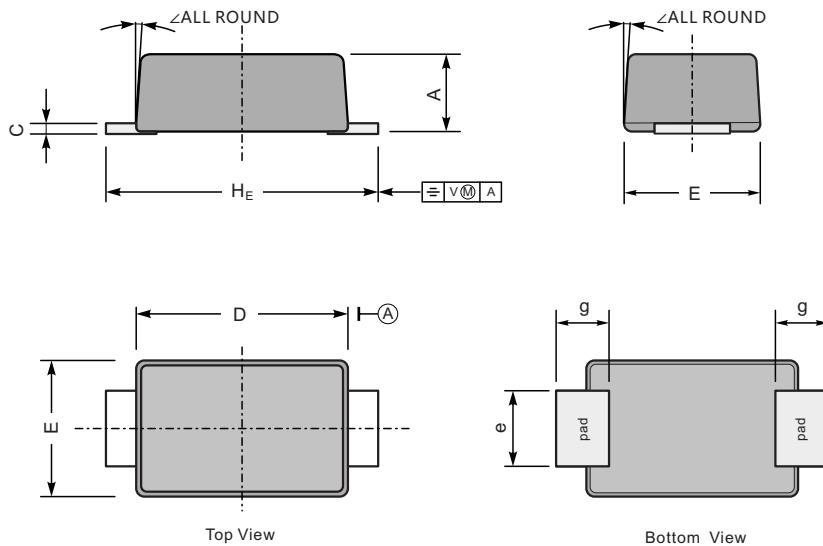
(2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

**Fig.1 Forward Current Derating Curve**

**Fig.2 Typical Reverse Characteristics**

**Fig.3 Typical Instantaneous Forward Characteristics**

**Fig.4 Typical Junction Capacitance**

**Fig.5 Maximum Non-Repetitive Peak Forward Surge Current**


## PACKAGE OUTLINE

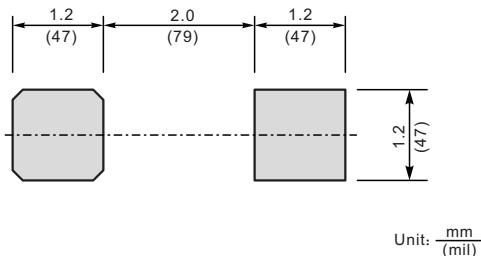
Plastic surface mounted package; 2 leads

SOD-123F



UNIT		A	C	D	E	e	g	H <sub>E</sub>	∠
mm	max	1.1	0.20	2.9	1.9	1.1	0.9	3.8	7°
	min	0.9	0.12	2.6	1.7	0.8	0.7	3.5	
mil	max	43	7.9	114	75	43	35	150	7°
	min	35	4.7	102	67	31	28	138	

### The recommended mounting pad size



Unit:  $\frac{\text{mm}}{(\text{mil})}$