

LISA2-WW-CLIP

~45° wide beam optimized for CREE XP-E. 6.8 mm high variant with clip installation.


TECHNICAL SPECIFICATIONS:

Dimensions	Ø 9.9 mm
Height	6.8 mm
Fastening	glue, clips
Colour	black
Box size	
Box weight	1.4 kg
Quantity in Box	2000 pcs
ROHS compliant	yes ⓘ



MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour
LISA2-WW	Single lens	PMMA	
LISA2-HLD-CLIP16-XP	Holder	PC	black

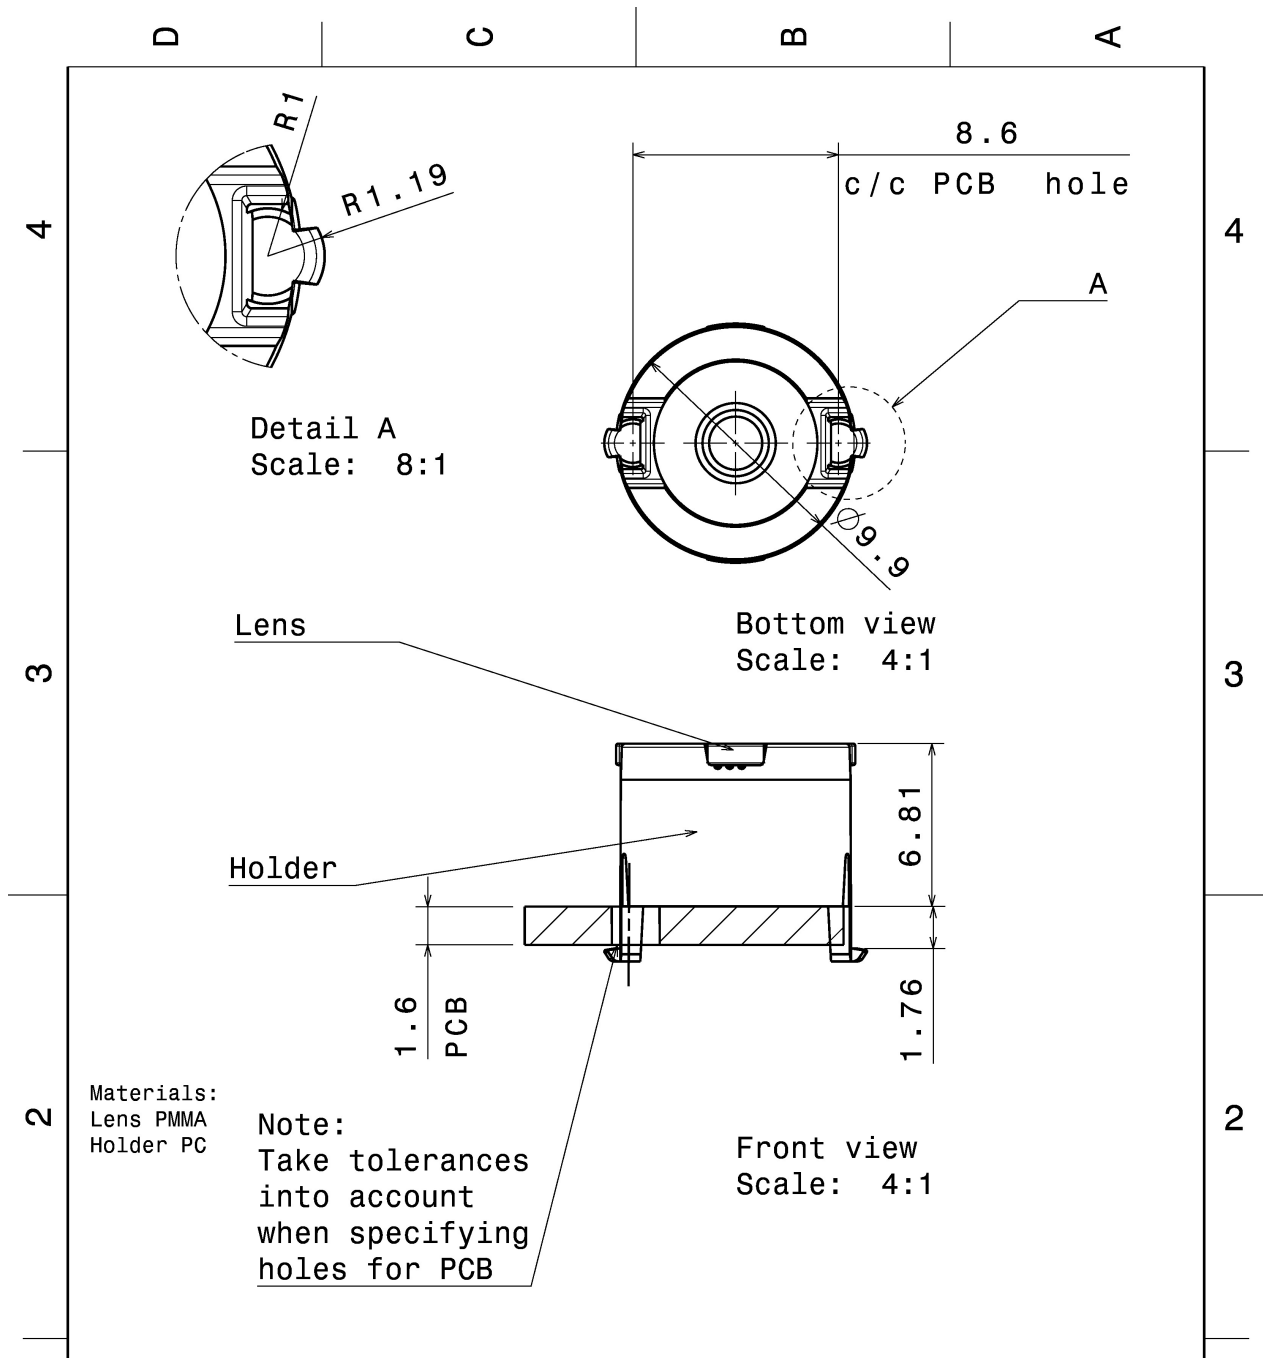

Materials:
Lens PMMA
Holder PC



Note:
Take tolerances
into account
when specifying
holes for PCB

This drawing is our property. It can't be reproduced or communicated without our written agreement.		LEDiL		Ledil Oy Salorankatu 10 FIN-24240 SALO Finland	
DRAWING TITLE					
DRAWN BY pl		DATE 20.06.2012		Datasheet Lisa2-clip16-XT series Assy	
CHECKED BY sn	DATE 20.7.2011	SIZE A4	DRAWING NUMBER		REV 1
DESIGNED BY pl	DATE 20.06.2012	SCALE 4:1	WEIGHT (g)	SHEET 1/1	


PHOTOMETRIC DATA (MEASURED):





LED XP-E2
 FWHM 43.0°
 Efficiency 88 %
 Peak intensity 1.350 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

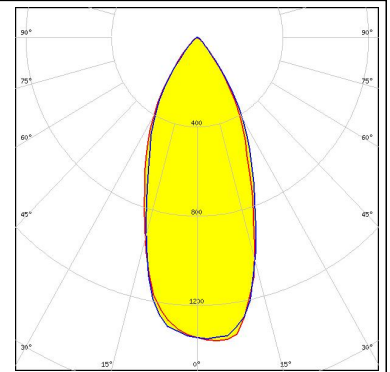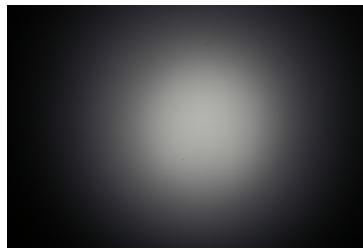


LED XP-G2
 FWHM 47.0°
 Efficiency 88 %
 Peak intensity 1.200 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

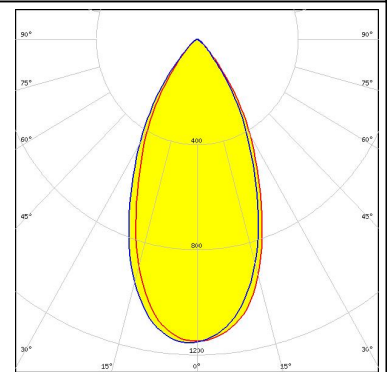

LED XP-G3
 FWHM 42.0°
 Efficiency 84 %
 Peak intensity 1.500 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

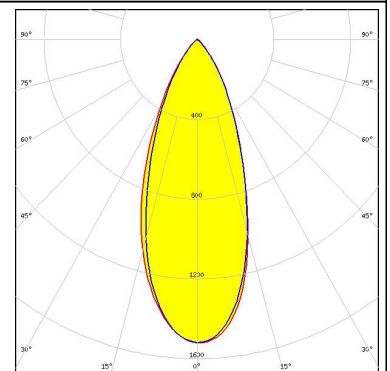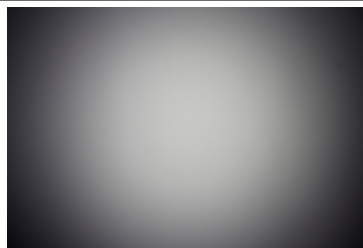


LED XT-E
 FWHM 47.0°
 Efficiency 84 %
 Peak intensity 1.100 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

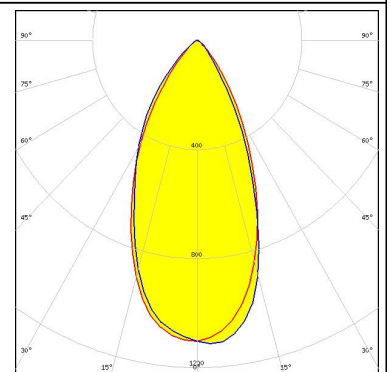


PHOTOMETRIC DATA (MEASURED):





LED LUXEON CZ
 FWHM 29.0°
 Efficiency 86 %
 Peak intensity 1.734 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

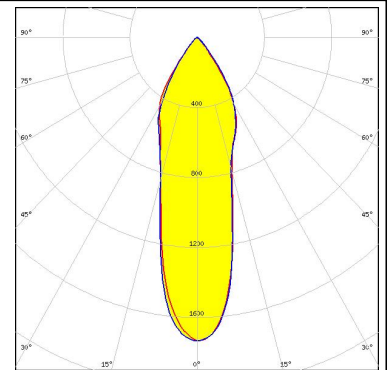


LED NCSxx19B
 FWHM 41.0°
 Efficiency 86 %
 Peak intensity 1.500 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

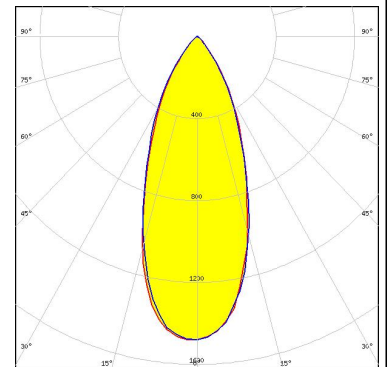

LED OSOLON Square EC
 FWHM 46.0°
 Efficiency 84 %
 Peak intensity 1.600 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

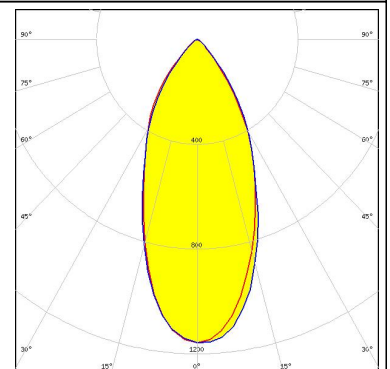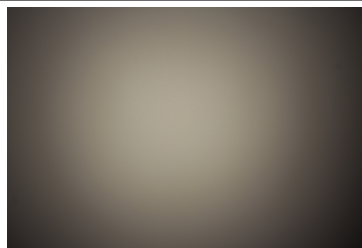

LED SFH 4715S
 FWHM 36.0°
 Efficiency 0 %
 Peak intensity 0.000 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

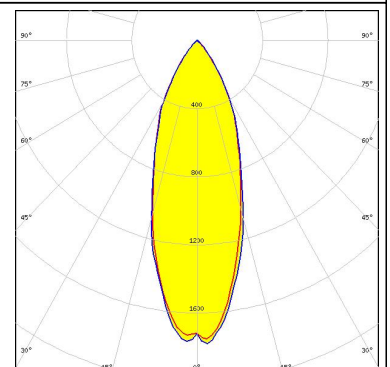

PHOTOMETRIC DATA (MEASURED):



OSRAM

Opto Semiconductors

LED SFH 4725S
FWHM 38.0°
Efficiency %
Peak intensity cd/lm
LEDs/each optic 1
Light colour White
Required components:



SAMSUNG

LED LH351B
FWHM 67.0°
Efficiency 88 %
Peak intensity 0.890 cd/lm
LEDs/each optic 1
Light colour White
Required components:

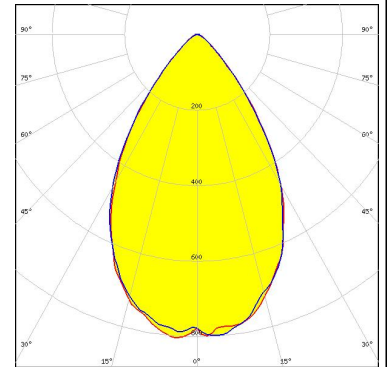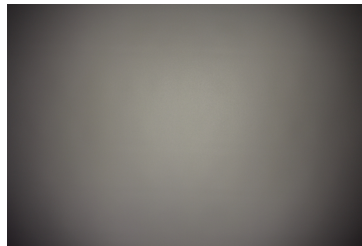

SAMSUNG


LED LH351Z
FWHM 60.0°
Efficiency 90 %
Peak intensity 0.950 cd/lm
LEDs/each optic 1
Light colour White
Required components:

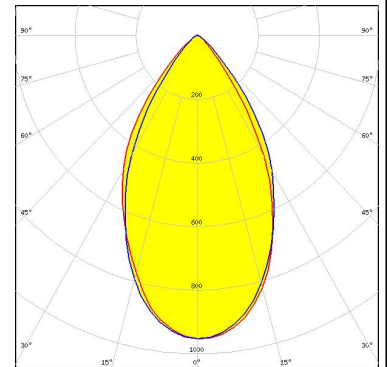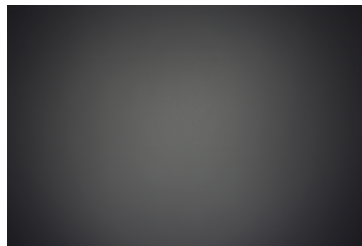

PHOTOMETRIC DATA (SIMULATED):



LED XP-G2 HE
FWHM 69.0°
Efficiency 88 %
Peak intensity 0.702 cd/lm
LEDs/each optic 1
Light colour White
Required components:

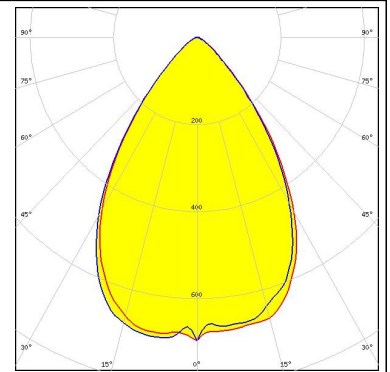

LED LUXEON IR Compact
FWHM 51.0°
Efficiency 84 %
Peak intensity 0.000 cd/lm
LEDs/each optic 1
Light colour White
Required components:



LED LUXEON IR Domed 150
FWHM 60.0°
Efficiency 90 %
Peak intensity 0.000 cd/lm
LEDs/each optic 1
Light colour White
Required components:



LED LUXEON Q
FWHM 54.0°
Efficiency 84 %
Peak intensity 1.000 cd/lm
LEDs/each optic 1
Light colour White
Required components:


PHOTOMETRIC DATA (SIMULATED):

OSRAM Opto Semiconductors

LED SFH 4770S
FWHM 35.0°
Efficiency 91 %
Peak intensity cd/lm
LEDs/each optic 1
Light colour White
Required components:

SEAGUL SEOUL SEMICONDUCTOR

LED Z8Y22P
FWHM 50.0°
Efficiency 86 %
Peak intensity 1.050 cd/lm
LEDs/each optic 1
Light colour White
Required components:

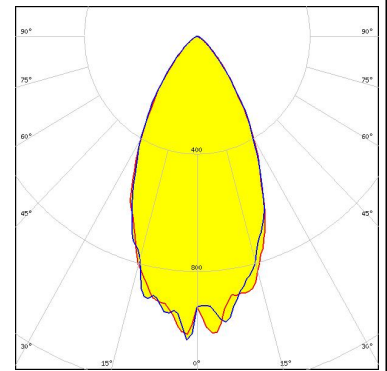

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)