



#### FEATURES:

- RoHS compliant
- Low profile metal package
- High efficiency up to 82%
- Wide 4:1 input range
- Operating temperature -40°C to + 85°C
- Input / Output Isolation 1500 and 3500VDC
- Pin compatible with multiple manufacturers
- Continuous short circuit protection

#### Models Single output



| Model           | Input Voltage (V) | Output Voltage (V) | Output Current max (mA) | Isolation (VDC) | Capacitive load, max (µF) | Efficiency (%) |
|-----------------|-------------------|--------------------|-------------------------|-----------------|---------------------------|----------------|
| AM3TW-2403SZ    | 9-36              | 3.3                | 800                     | 1500            | 1000                      | 75             |
| AM3TW-2405SZ    | 9-36              | 5                  | 600                     | 1500            | 1000                      | 78             |
| AM3TW-2407SZ    | 9-36              | 7.2                | 417                     | 1500            | 200                       | 78             |
| AM3TW-2409SZ    | 9-36              | 9                  | 333                     | 1500            | 200                       | 79             |
| AM3TW-2412SZ    | 9-36              | 12                 | 250                     | 1500            | 100                       | 81             |
| AM3TW-2415SZ    | 9-36              | 15                 | 200                     | 1500            | 100                       | 81             |
| AM3TW-2418SZ    | 9-36              | 18                 | 167                     | 1500            | 47                        | 81             |
| AM3TW-2424SZ    | 9-36              | 24                 | 125                     | 1500            | 47                        | 81             |
| AM3TW-4803SZ    | 18-72             | 3.3                | 800                     | 1500            | 1000                      | 76             |
| AM3TW-4805SZ    | 18-72             | 5                  | 600                     | 1500            | 1000                      | 80             |
| AM3TW-4807SZ    | 18-72             | 7.2                | 417                     | 1500            | 200                       | 78             |
| AM3TW-4809SZ    | 18-72             | 9                  | 333                     | 1500            | 200                       | 82             |
| AM3TW-4812SZ    | 18-72             | 12                 | 250                     | 1500            | 100                       | 80             |
| AM3TW-4815SZ    | 18-72             | 15                 | 200                     | 1500            | 100                       | 80             |
| AM3TW-4818SZ    | 18-72             | 18                 | 167                     | 1500            | 47                        | 80             |
| AM3TW-4824SZ    | 18-72             | 24                 | 125                     | 1500            | 47                        | 81             |
| AM3TW-2403SH35Z | 9-36              | 3.3                | 800                     | 3500            | 1000                      | 75             |
| AM3TW-2405SH35Z | 9-36              | 5                  | 600                     | 3500            | 1000                      | 78             |
| AM3TW-2407SH35Z | 9-36              | 7.2                | 417                     | 3500            | 200                       | 78             |
| AM3TW-2409SH35Z | 9-36              | 9                  | 333                     | 3500            | 200                       | 79             |
| AM3TW-2412SH35Z | 9-36              | 12                 | 250                     | 3500            | 100                       | 81             |
| AM3TW-2415SH35Z | 9-36              | 15                 | 200                     | 3500            | 100                       | 81             |
| AM3TW-2418SH35Z | 9-36              | 18                 | 167                     | 3500            | 47                        | 81             |
| AM3TW-2424SH35Z | 9-36              | 24                 | 125                     | 3500            | 47                        | 81             |
| AM3TW-4803SH35Z | 18-72             | 3.3                | 800                     | 3500            | 1000                      | 76             |
| AM3TW-4805SH35Z | 18-72             | 5                  | 600                     | 3500            | 1000                      | 80             |
| AM3TW-4807SH35Z | 18-72             | 7.2                | 417                     | 3500            | 200                       | 78             |
| AM3TW-4809SH35Z | 18-72             | 9                  | 333                     | 3500            | 200                       | 82             |
| AM3TW-4812SH35Z | 18-72             | 12                 | 250                     | 3500            | 100                       | 80             |
| AM3TW-4815SH35Z | 18-72             | 15                 | 200                     | 3500            | 100                       | 80             |
| AM3TW-4818SH35Z | 18-72             | 18                 | 167                     | 3500            | 47                        | 80             |
| AM3TW-4824SH35Z | 18-72             | 24                 | 125                     | 3500            | 47                        | 81             |

#### Models Dual output

| Model        | Input Voltage (V) | Output Voltage (V) | Output Current max (mA) | Isolation (VDC) | Capacitive load, max (µF) | Efficiency (%) |
|--------------|-------------------|--------------------|-------------------------|-----------------|---------------------------|----------------|
| AM3TW-2403DZ | 9-36              | ±3.3               | ±400                    | 1500            | ±470                      | 76             |
| AM3TW-2405DZ | 9-36              | ±5                 | ±300                    | 1500            | ±470                      | 79             |
| AM3TW-2407DZ | 9-36              | ±7.2               | ±208                    | 1500            | ±100                      | 78             |
| AM3TW-2409DZ | 9-36              | ±9                 | ±167                    | 1500            | ±100                      | 79             |
| AM3TW-2412DZ | 9-36              | ±12                | ±125                    | 1500            | ±68                       | 80             |
| AM3TW-2415DZ | 9-36              | ±15                | ±100                    | 1500            | ±68                       | 80             |
| AM3TW-2418DZ | 9-36              | ±18                | ±84                     | 1500            | ±33                       | 81             |

**Models**  
**Dual output**

| Model           | Input Voltage (V) | Output Voltage (V) | Output Current max (mA) | Isolation (VDC) | Capacitive load, max (μF) | Efficiency (%) |
|-----------------|-------------------|--------------------|-------------------------|-----------------|---------------------------|----------------|
| AM3TW-2424DZ    | 9-36              | ±24                | ±63                     | 1500            | ±33                       | 80             |
| AM3TW-4803DZ    | 18-72             | ±3.3               | ±400                    | 1500            | ±470                      | 76             |
| AM3TW-4805DZ    | 18-72             | ±5                 | ±300                    | 1500            | ±470                      | 81             |
| AM3TW-4807DZ    | 18-72             | ±7.2               | ±208                    | 1500            | ±100                      | 78             |
| AM3TW-4809DZ    | 18-72             | ±9                 | ±167                    | 1500            | ±100                      | 82             |
| AM3TW-4812DZ    | 18-72             | ±12                | ±125                    | 1500            | ±68                       | 81             |
| AM3TW-4815DZ    | 18-72             | ±15                | ±100                    | 1500            | ±68                       | 82             |
| AM3TW-4818DZ    | 18-72             | ±18                | ±84                     | 1500            | ±33                       | 81             |
| AM3TW-4824DZ    | 18-72             | ±24                | ±63                     | 1500            | ±33                       | 81             |
| AM3TW-2403DH35Z | 9-36              | ±3.3               | ±400                    | 3500            | ±470                      | 76             |
| AM3TW-2405DH35Z | 9-36              | ±5                 | ±300                    | 3500            | ±470                      | 79             |
| AM3TW-2407DH35Z | 9-36              | ±7.2               | ±208                    | 3500            | ±100                      | 78             |
| AM3TW-2409DH35Z | 9-36              | ±9                 | ±167                    | 3500            | ±100                      | 79             |
| AM3TW-2412DH35Z | 9-36              | ±12                | ±125                    | 3500            | ±68                       | 80             |
| AM3TW-2415DH35Z | 9-36              | ±15                | ±100                    | 3500            | ±68                       | 80             |
| AM3TW-2418DH35Z | 9-36              | ±18                | ±84                     | 3500            | ±33                       | 81             |
| AM3TW-2424DH35Z | 9-36              | ±24                | ±63                     | 3500            | ±33                       | 80             |
| AM3TW-4803DH35Z | 18-72             | ±3.3               | ±400                    | 3500            | ±470                      | 76             |
| AM3TW-4805DH35Z | 18-72             | ±5                 | ±300                    | 3500            | ±470                      | 81             |
| AM3TW-4807DH35Z | 18-72             | ±7.2               | ±208                    | 3500            | ±100                      | 78             |
| AM3TW-4809DH35Z | 18-72             | ±9                 | ±167                    | 3500            | ±100                      | 82             |
| AM3TW-4812DH35Z | 18-72             | ±12                | ±125                    | 3500            | ±68                       | 81             |
| AM3TW-4815DH35Z | 18-72             | ±15                | ±100                    | 3500            | ±68                       | 82             |
| AM3TW-4818DH35Z | 18-72             | ±18                | ±84                     | 3500            | ±33                       | 81             |
| AM3TW-4824DH35Z | 18-72             | ±24                | ±63                     | 3500            | ±33                       | 81             |

NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.

**Input Specifications**

| Parameters                     | Nominal          | Typical            | Maximum | Units |
|--------------------------------|------------------|--------------------|---------|-------|
| Voltage range                  | 24<br>48         | 9-36<br>18-72      |         | VDC   |
| Filter                         |                  | π (Pi) Network     |         |       |
| Turn on Transient process time |                  |                    | 350     | ms    |
| Start up time                  |                  | 500                |         | ms    |
| Absolute Maximum Rating        | 24 Vin<br>48 Vin | -0.7-40<br>-0.7-80 |         | VDC   |
| Peak Input Voltage time        |                  | 100                |         | ms    |

**Isolation Specifications**

| Parameters     | Conditions | Typical | Rated         | Units |
|----------------|------------|---------|---------------|-------|
| Tested voltage | 3 sec      |         | 1500 and 3500 | VDC   |
| Resistance     |            | > 1000  |               | MOhm  |
| Capacitance    |            | 470     |               | pF    |

**Output Specifications**

| Parameters                       | Conditions | Typical | Maximum | Units |
|----------------------------------|------------|---------|---------|-------|
| Voltage accuracy                 |            | ±1      |         | %     |
| Voltage balance (Dual output)    |            | ±1      |         | %     |
| Short Circuit protection         | Continuous |         |         |       |
| Short circuit restart            | Automatic  |         |         |       |
| Line voltage regulation (Single) | LL-HL      | ±0.5    |         | %     |

Output Specifications (continued)

| Parameters  | Conditions      | Typical | Maximum | Units  |
|---|-----------------|---------|---------|--------|
| Line voltage regulation (Dual)                        | LL-HL           | ±0.5    |         | %      |
| Load voltage regulation (Single)                      | Load: 10...100% | ±0.5    |         | %      |
| Load voltage regulation (Single)<br>3.3V output model | Load: 10...100% | ±1.5    |         | %      |
| Load voltage regulation (Dual)                        | Load: 10...100% | ±0.5    |         | %      |
| Load voltage regulation (Dual)<br>±3.3V output model  | Load: 10...100% | ±1.5    |         | %      |
| Temperature coefficient                               |                 | ±0.02   |         | %/°C   |
| Ripple & Noise  | 0...20MHz       | 60      |         | mV p-p |
| Rising time   |                 | 10      |         | ms     |



General Specifications

| Parameters             | Conditions                        | Typical   | Maximum                  | Units |
|------------------------|-----------------------------------|---|--------------------------|-------|
| Switching frequency    | 100% load                         | 250   |                          | KHz   |
| Operating temperature  | Full Load without Derating        | -40 to +85  |                          | °C    |
| Storage temperature    |                                   | -40 to +125   |                          | °C    |
| Case temperature       |                                   |   | 100                      | °C    |
| Cooling                | Free air convection               |   |                          |       |
| Humidity               | Non condensing                    |   | 90                       | %     |
| Case material          |                                   | Nickel-coated copper                                    |                          |       |
| Weight                 |                                   | 21  |                          | g     |
| Dimensions (L x W x H) | Tolerance ±0.5 mm or ±0.02 inches | 1.28 x 0.84 x 0.41 inches                               | 32.25 x 21.35 x 10.50 mm |       |
| MTBF                   |                                   | >1 222 000 hrs (MIL-HDBK -217F, Ground Benign, t=+25°C) |                          |       |

Pin Out Specifications

| Pin   | 1500VDC   |           | 3500VDC   |           |
|-------|-----------|-----------|-----------|-----------|
|       | Single    | Dual      | Single    | Dual      |
| 1     | +V Input  | +V Input  | No pin    | No pin    |
| 2     | N.C.      | -V Output | -V Input  | -V Input  |
| 3     | N.C.      | Common    | -V Input  | -V Input  |
| 9     | No pin    | No pin    | No Pin    | Common    |
| 10    | -V Output | Common    | No pin    | No pin    |
| 11    | +V Output | +V Output | N.C.      | -V Output |
| 12/13 | -V Input  | -V Input  | No pin    | No pin    |
| 14    | +V Output | +V Output | +V Output | +V Output |
| 15    | -V Output | Common    | No pin    | No pin    |
| 16    | No pin    | No pin    | -V Output | Common    |
| 22    | N.C.      | Common    | +V Input  | +V Input  |
| 23    | N.C.      | -V Output | +V Input  | +V Input  |
| 24    | +V Input  | +V Input  | No pin    | No pin    |

Dimensions

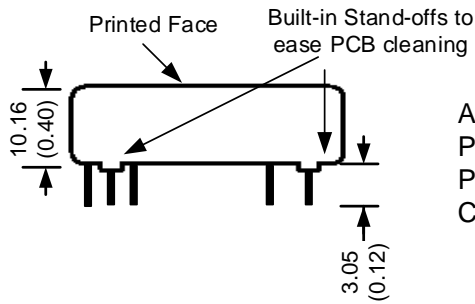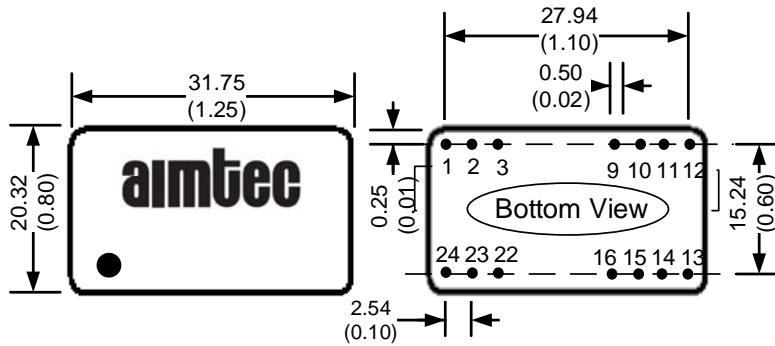

All dimensions are typical: millimeters (inches)  
 Pin Diameter:  $0.50 \pm 0.05$  ( $0.02 \pm 0.002$ )  
 Pin Pitch Tolerance:  $\pm 0.35$  ( $\pm 0.014$ )  
 Case Tolerance:  $\pm 0.5$  ( $\pm 0.02$ )

**NOTE:** 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to [www.aimtec.com](http://www.aimtec.com) for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at [www.aimtec.com](http://www.aimtec.com).