

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [1510633103](#)
Status: **Active**
Overview: Milli-Grid Connector System
Description: 2.00mm Pitch Milli-Grid Header, Through Hole, Single Row, Vertical, 0.05µm Gold (Au) Plating, without Peg, 2.60mm PC Tail Length, without Pick and Place Cap, 3 Circuits, Lead-free

Documents:

[Drawing \(PDF\)](#) [Packaging Specification PK-151062-0001-001 \(PDF\)](#)
[Product Specification PS-151062-0001-001 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA LR19980
 UL E29179

General

Product Family PCB Headers
 Series [151063](#)
 Application Signal, Wire-to-Board
 Comments See Product Specification for maximum current rating by wire AWG
 Overview Milli-Grid Connector System
 Product Name Milli-Grid
 UPC 889056655231

Physical

Breakaway No
 Circuits (Loaded) 3
 Circuits (maximum) 3
 Color - Resin Black
 Durability (mating cycles max) 25
 First Mate / Last Break No
 Flammability 94V-0
 Glow-Wire Capable No
 Guide to Mating Part No
 Keying to Mating Part None
 Lock to Mating Part Yes
 Material - Metal Copper Alloy
 Material - Plating Mating Gold over Nickel
 Material - Plating Termination Tin over Nickel
 Material - Resin Liquid Crystal Polymer
 Net Weight 380.739/mg
 Number of Rows 1
 Orientation Vertical
 PC Tail Length 2.60mm
 PCB Locator No
 PCB Retention None
 PCB Thickness - Recommended 1.50mm
 Packaging Type Tube
 Pitch - Mating Interface 2.00mm
 Pitch - Termination Interface 2.00mm
 Plating min - Mating 0.050µm
 Plating min - Termination 2.000µm
 Polarized to Mating Part Yes
 Polarized to PCB Yes
 Shrouded Yes
 Stackable No

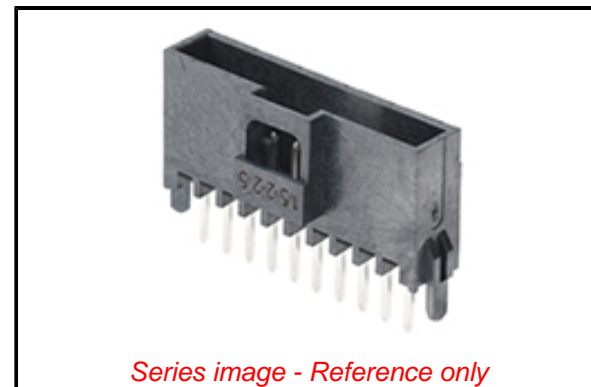

Series image - Reference only

EU ELV

Compliant

EU RoHS

Compliant

REACH SVHC

Not Contained Per
 -ED/01/2018 (15
 January 2018)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Compliant

Not Contained

Search Parts in this Series

[151063 Series](#)

Mates With

Milli-Grid Receptacle Housing [151100](#)

Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40° to +70°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	2.5A
Voltage - Maximum	125V AC

Solder Process Data

Duration at Max. Process Temperature (seconds)	010
Lead-free Process Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	260

Material Info**Reference - Drawing Numbers**

Packaging Specification	PK-151062-0001-001
Product Specification	PS-151062-0001-001
Sales Drawing	SD-151063-0001

This document was generated on 10/01/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION