

isc Silicon NPN Power Transistors
2SC2592
DESCRIPTION



- Silicon NPN epitaxial planar type
- High transition frequency
- Complement to Type 2SA1112
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

APPLICATIONS

- AF Driver, High power Amplifier complementary Pairs with 2SA1112.

ABSOLUTE MAXIMUM RATINGS(Ta=25°C)

SYMBOL	PARAMETER	VALUE	UNIT
V _{CBO}	Collector-Base Voltage	180	V
V _{CEO}	Collector-Emitter Voltage	180	V
V _{EBO}	Emitter-Base Voltage	5	V
I _C	Collector Current-Continuous	1.0	A
P _C	Collector Power Dissipation @ T _C =25°C	20	W
T _J	Junction Temperature	150	°C
T _{stg}	Storage Temperature Range	-55~150	°C

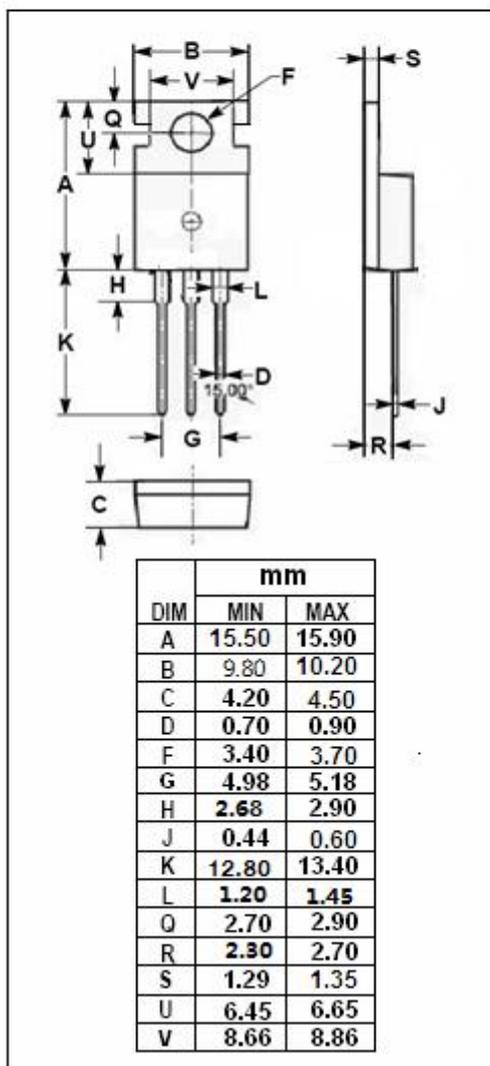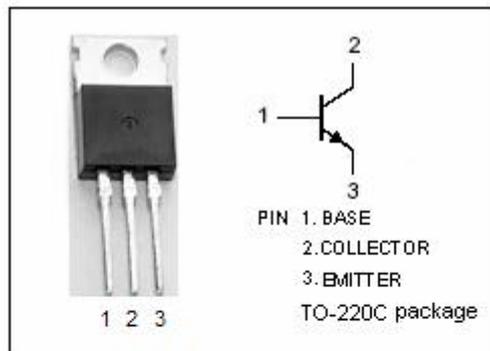

isc Silicon NPN Power Transistors
2SC2592
ELECTRICAL CHARACTERISTICS

 T_c=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{CE(sat)}	Collector-Emitter Saturation Voltage	I _C = 500mA; I _B = 50mA			2.0	V
V _{BE(sat)}	Base-Emitter Saturation Voltage	I _C = 500mA; I _B = 50mA			2.0	V
h _{FE1}	DC Current Gain	I _C = 150mA ; V _{CE} = 10V	90		330	
h _{FE2}	DC Current Gain	I _C = 500mA ; V _{CE} = 5V	50			
f _T	Current-Gain—Bandwidth Product	I _C = 50mA ; V _{CE} = 10V		200		MHz
C _{OB}	Output Capacitance	I _E = 0 ; V _{CB} = 10V; f _{test} = 1.0MHz		20	30	pF

◆ h_{FE} Classifications

Q	R	S
90-155	130-220	185-330

NOTICE:

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.